

Gibbs ensemble Monte Carlo simulations of multicomponent natural gas mixtures

M. Ramdin, S. H. Jamali, T. M. Becker & T. J. H. Vlugt

To cite this article: M. Ramdin, S. H. Jamali, T. M. Becker & T. J. H. Vlugt (2018) Gibbs ensemble Monte Carlo simulations of multicomponent natural gas mixtures, *Molecular Simulation*, 44:5, 377-383, DOI: [10.1080/08927022.2017.1387656](https://doi.org/10.1080/08927022.2017.1387656)

To link to this article: <https://doi.org/10.1080/08927022.2017.1387656>



© 2017 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group



[View supplementary material](#)



Published online: 17 Oct 2017.



[Submit your article to this journal](#)



Article views: 1811



[View related articles](#)



[View Crossmark data](#)



Citing articles: 7 [View citing articles](#)

Gibbs ensemble Monte Carlo simulations of multicomponent natural gas mixtures

M. Ramdin , S. H. Jamali , T. M. Becker  and T. J. H. Vlugt 

Engineering Thermodynamics, Process & Energy Department, Faculty 3mE, Delft University of Technology, Delft, The Netherlands

ABSTRACT

Vapour–liquid equilibrium (VLE) and volumetric data of multicomponent mixtures are extremely important for natural gas production and processing, but it is time consuming and challenging to experimentally obtain these properties. An alternative tool is provided by means of molecular simulation. Here, Monte Carlo (MC) simulations in the Gibbs ensemble are used to compute the VLE of multicomponent natural gas mixtures. Two multicomponent systems, one containing a mixture of six components (N_2 , CH_4 , CO_2 , H_2S , C_2H_6 and C_3H_8), and the other containing a mixture of nine components (N_2 , CH_4 , CO_2 , H_2S , C_2H_6 , C_3H_8 , C_5H_{12} , C_7H_{16} and $C_{10}H_{22}$) are simulated. The computed VLE from the MC simulations is in good agreement with available experimental data and the GERG-2008 equation of state modelling. The results show that molecular simulation can be used to predict properties of multicomponent systems relevant for the natural gas industry. Guidelines are provided to setup Gibbs ensemble simulations for multicomponent systems, which is a challenging task due to the increased number of degrees of freedom.

ARTICLE HISTORY

Received 23 March 2017
Accepted 26 September 2017

KEYWORDS

Gibbs ensemble;
multicomponent VLE;
natural gas; molecular
simulation

1. Introduction

Reservoir engineers and technologists require accurate vapour–liquid equilibrium (VLE) and volumetric (PVT) data to estimate gas/condensate production rates, prevent solid/liquid formation in natural gas production/processing pipelines, and to design separation units to meet customer specifications [1,2]. However, natural gas is a complex mixture of many components with a variable composition, which makes it nearly impossible for experimentalists to measure the properties of all possible mixtures and conditions [3]. Typically, VLE and PVT data of multicomponent systems are computed with an equation of state (EoS), which requires experimental data of representative systems to calibrate the EoS parameters. In practice, three types of VLE experiments are performed [4,5]: (1) sampling experiments to measure the composition of one or more phases ($pTxy$), (2) bubble-point (PTx) and (3) dew-point (PTy) measurements. The last two types of measurements do not provide tie-line information, but are easier to perform compared to the more elaborate sampling experiments. In a bubble-point experiment, the gas-phase composition is unknown, while in a dew-point experiment the liquid-phase composition is unknown, but both can be computed from an EoS by, respectively, fitting to PTx and PTy data. However, computing high-pressure phase equilibria of (multiphase) multicomponent mixtures is a non-trivial task since EoSs often suffer from convergence and stability problems [6]. These limitations of EoSs are well-known and have been investigated in great detail by Michelsen [7–9]. For a recent overview of EoS modelling of natural gas systems, the reader is referred to [10–13].

Here, we investigate the accuracy of molecular simulations to compute $pTxy$ data of multicomponent natural gas mixtures. Note that EoS modelling is more practical and widely used in the natural gas industry, but molecular simulation can be a valuable tool especially in the absence of experimental data. Monte Carlo simulations in the Gibbs ensemble (GEMC) [14,15] are used to compute the VLE of two multicomponent systems. The first mixture contains N_2 , CH_4 , CO_2 , H_2S , C_2H_6 and C_3H_8 and corresponds to the experimental system studied by Kalra and Robinson [16]. The second mixture contains N_2 , CH_4 , CO_2 , H_2S , C_2H_6 , and C_3H_8 , C_5H_{12} , C_7H_{16} and $C_{10}H_{22}$ and corresponds to the experimental system (mixture 14) studied by Yarborough [17]. Although Gibbs ensemble simulations are often performed for unary, binary and ternary (confined) systems, its application to multicomponent (i.e., 4 or more components) systems is relatively rare [18–25]. The reason for this is two-fold; (1) experimental ($pTxy$) data for multicomponent systems are extremely scarce, which complicates validation of simulation results and (2) as it will become apparent in the next section, performing a multicomponent Gibbs ensemble simulation requires an increased effort compared to unary and binary systems. The VLE computed from the MC simulations are compared with experimental data and the GERG-2008 model, which is the reference EoS for natural gas systems [26].

2. Simulation details

Figure 1 shows the resemblance between sampling experiments and the Gibbs ensemble simulations [14,15]. Monte Carlo

CONTACT T. J. H. Vlugt  t.j.h.vlugt@tudelft.nl

 Supplemental data for this article can be accessed here. [<https://doi.org/10.1080/08927022.2017.1387656>]

simulations in the NVT -Gibbs or the NPT -Gibbs ensemble can be used to compute $pTxy$ data of mixtures [27]. In both ensembles, the total number of molecules (N) and temperature (T) are fixed, while the volume (V^i) of the individual simulation boxes is allowed to change. In the NVT -Gibbs ensemble, the volume of the two boxes is coupled in such a way that the total volume ($V^T = V^1 + V^2$) is constant, but in the NPT -Gibbs ensemble the volume of the boxes can change independently to satisfy the imposed pressure (P). As a consequence of the Gibbs phase-rule, only the NVT -Gibbs ensemble can be used to compute VLE properties of unary systems. The Gibbs phase-rule for a non-reacting system is given by,

$$f = 2 + N - \pi \quad (1)$$

where f is the number of degrees of freedom, N the number of components and π the number of phases. Clearly, for an unary system ($N = 1$) with two phases in equilibrium ($\pi = 2$) there is only one degree of freedom, which shows that the NVT -Gibbs is the only eligible ensemble for pure components. In principle, both ensembles can be used to compute the VLE of binary and multicomponent systems. In experiments, the composition of equilibrium phases are sampled and analysed at constant pressure and temperature conditions. Therefore, NPT -Gibbs ensemble simulations are more practical and allow a direct comparison with experiments. The central problem in Gibbs ensemble simulations, regardless of the chosen ensemble (NVT or NPT), is the initial distribution of the molecules in the boxes (1) to keep the size of both boxes larger than twice the cut-off radius and (2) to allow a quick phase split. Condition (1) is required to avoid unphysical interactions of particles due to the nearest neighbour convention [27]. Condition (2) essentially means that a good initial guess of the phase compositions should be provided for convergence of the system towards equilibrium. Note that this condition also holds for equation of state modelling. In fact, the size of the boxes is governed by the density of the systems, while the phase composition is governed by the distribution constant, K_i , defined as [28]:

$$K_i = \frac{y_i}{x_i} \quad (2)$$

where y_i and x_i are the composition of component i in the gas and liquid-phase, respectively. It is clear that in the absence of experimental data one would need an EoS to perform a flash calculation to obtain the density of the phases and the distribution constant of the components. The requirement of an EoS to setup a Gibbs ensemble simulation is a major drawback of the method limiting its application to complex multicomponent systems. Here, we seek alternative ways to estimate the K_i 's avoiding the use of EoS. Note that in the Gibbs ensemble only a reasonable guess for the K_i 's needs to be provided, which can be obtained from ideality considerations or ad-hoc correlations. For example, Raoult's law can be used to estimate the distribution constants as [31]:

$$K_i = \frac{y_i}{x_i} = \left(\frac{P_i^{\text{sat}}}{P} \right)_T \quad (3)$$

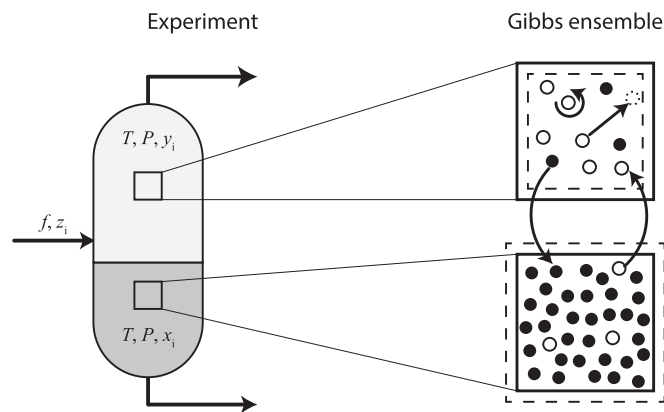


Figure 1. Resemblance of experiments and the Gibbs ensemble simulations. In an experiment, a stream with a known overall composition (z_i) is flashed at a constant temperature and pressure yielding a gas and a liquid-phase with composition y_i and x_i , respectively. In a Gibbs ensemble simulation, two simulation boxes are used to simulate properties of coexisting phases away from the gas/liquid interface. In an experiment, the conditions for phase equilibrium (i.e., the equality of temperature, pressure and chemical potentials) are met using a stable thermostatic bath, a pressure controller and a stirrer to enhance mass-transfer. Equivalently, in the Gibbs ensemble simulations, four kinds of MC moves (translation, rotation, volume change and molecule transfer with CBMC [29]) are performed to satisfy the equilibrium conditions [30]. In experiments and in simulations, sampling of the phases is only performed after ensuring that equilibrium is reached.

where P_i^{sat} and P denote the saturation pressure of component i and the flash/total pressure, respectively. Equation (3) assumes an ideal gas phase (i.e., $\phi = 1$) and an ideal liquid phase (i.e., $\gamma = 1$). Unfortunately, Equation (3) cannot be used when some of the components are supercritical, which would require extrapolation of the saturation pressures often leading to erroneous results. In some cases, the K_i 's of the supercritical compounds can be obtained from Henry's law [31]:

$$K_i = \frac{y_i}{x_i} = \frac{H_i}{P} \quad (4)$$

where H_i is the Henry constant of component i . Equation (4) is difficult to apply for multicomponent systems, since Henry constant data might not be available for all the components present in the liquid mixture. Alternatively, one can use correlations to estimate the distribution constants. An example of such a correlation is provided by Wilson [32]:

$$K_i = \frac{P_{ci}}{P} \exp \left[5.37(1 + \omega_i) \left(1 - \frac{T_{ci}}{T} \right) \right] \quad (5)$$

where P_{ci} , T_{ci} and ω_i are, respectively, the critical pressure (psia), critical temperature (in $^{\circ}\text{R}$) and the acentric factor of component i . P and T are the pressure (psia) and temperature (in $^{\circ}\text{R}$) of the system in equilibrium. Equation (5) is mainly developed for hydrocarbons and applicable for low to moderate pressures assuming that the K -values are composition independent. Many more correlations for K -values exist and the reader is referred to [1,2,33,34] for an overview. Equations (3) and (5) have a limited application range, but can be very useful to setup a Gibbs ensemble simulation for natural gas systems.

To perform a Gibbs ensemble simulation, one requires force fields, which are potentials to describe the intra and intermolecular interactions of all components in the mixture. The TraPPE united-atom (UA) force field have been used to describe N_2 ,

CH₄, CO₂, H₂S, C₂H₆, C₃H₈, C₅H₁₂, C₇H₁₆ and C₁₀H₂₂ [35–37]. The molecules N₂, CH₄, CO₂, H₂S and C₂H₆ were considered rigid in the simulations, while the higher alkanes were considered flexible. The internal degrees of freedom of the flexible molecules were sampled using the configurational-bias Monte Carlo (CBMC) scheme [29]. Interactions between dissimilar atoms were described by the Lorentz–Berthelot mixing rules [38]. The electrostatic interactions were described by the Ewald method using a relative precision of 10^{−5} [27]. Note that only N₂, CO₂ and H₂S contain partial charges, whereas the alkanes are uncharged. The Lennard-Jones (LJ) interactions were truncated at 14 Å and tail corrections were applied [27]. Given an initial/overall composition, z_i , the following steps are required to setup a Gibbs ensemble simulation: (1) Choose the total number of particles (N_T). Note that the VLE is independent of N_T , but it should be chosen such that the statistics and the computational time are acceptable. (2) Compute the K -values of all components from an EoS or the correlations outlined in the previous section and distribute molecules in both boxes accordingly. The initial molecule distribution can be computed from a known z_i and K_i , by simultaneously solving Equation (2) and the component-balance equation,

$$x_i N_T^L + y_i N_T^G = z_i N^T, \quad (6)$$

using the constraints $\sum x_i = \sum y_i = \sum z_i = 1$. In Equation (6), x_i and y_i are the liquid- and gas-phase mole fractions of component i , respectively. N_T^L and N_T^G are the total number of molecules in the liquid- and gas-phase. (3) Estimate the size of both boxes corresponding with the molecule distribution of the previous step. The density of each subsystem can be estimated from an NPT simulation or from an EoS. Since the cut-off radius in our simulation is 14 Å, the size of both boxes should be at least 28 Å. Typically, the size of the gas box is twice the size of the liquid box. However, note that the box size (volume) is an output of the Gibbs ensemble simulation and controlled by the total number of particles (N_T) at given T and P . Hence, if the equilibrium box size is less than twice the cut-off radius, one should simply increase the total number of particles keeping z_i fixed. (4) Start the Gibbs ensemble simulation with the estimated molecule distribution and box sizes. The GEMC simulations were started with an equilibration run of 50,000 MC cycles followed by a production run of 0.2 million cycles. The number of steps in a MC cycle equals the total number of particles in the simulation box. The reported error bars represent the 95% confidence interval obtained from four independent simulations with different random seed numbers and initial configurations.

Furthermore, it is important to choose the state-points (T , P) carefully, since Gibbs ensemble simulations become unstable near critical points [39]. Therefore, one should avoid simulations near critical points of pure components and/or mixtures. Protocols to setup efficient Gibbs ensemble simulations are provided by Cortés Morales et al. [40]. Here, the simulation conditions were chosen based on the availability of experimental data. The total number of molecules in our simulation was varied from around 500 to 1500 and Equation (5) was used to estimate the K -values. In Table 1, the properties of the studied

components and the initial composition (z_i) of the mixtures are listed.

3. Results and discussion

To compute the VLE of multicomponent natural gas mixtures, MC simulations in the NPT-Gibbs ensemble were performed using RASPA [41,42], a molecular simulation tool. The simulations were performed at different temperatures and pressures. In Figure 2, the K -values computed from the MC simulations at two temperatures were compared with the experimental data of Kalra and Robinson [16], and the GERG-2008 EoS modelling [26]. The results show that the MC simulation is in good agreement for N₂ and CH₄. The K -values of CO₂ and H₂S are slightly underestimated, while the K -values of C₂H₆ and C₃H₈ are slightly, but systematically, overestimated. However, the temperature and pressure dependency of the K -values are correctly captured by the MC simulations. In Figure 3, the coexistence densities of the vapour and liquid-phase computed from the MC simulations are compared with the experiments of Kalra and Robinson [16], and the GERG-2008 EoS modelling. The gas-phase densities are in good agreement with the experimental data, but the MC simulations slightly overpredict the liquid-phase densities. This overprediction is due to the UA description of the alkanes, which results in a more dense packing of the molecules in the liquid [43]. Furthermore, the GERG-2008 EoS is able to correctly describe this six-component (Mix 1) natural gas mixture. The MC simulations were extended to a more challenging nine-component natural gas system (Mix 2), which was experimentally studied by Yarborough [17]. In Figure 4, the K -values computed from the MC simulations are compared with experimental data and the GERG-2008 EoS. The K -values of N₂ and CH₄ from the MC simulations are in good agreement with experiments, but again the K -values of CO₂ and H₂S are slightly underestimated, while the K -values of the higher alkanes, especially *n*-pentane, *n*-heptane and *n*-decane, are systematically overestimated. Moreover, the GERG-2008 modelling results are, except for nitrogen, in good agreement with experiments. For N₂, the GERG-2008 EoS overestimate the K -values, while the MC data are in good agreement with the experiments. In Figure 5, the coexistence densities of the vapour and liquid-phase computed from the MC simulations are compared with the GERG-2008 EoS modelling. Again, the gas-phase densities are in good agreement with the EoS results, but the liquid-phase densities are slightly overpredicted. Furthermore, the GERG-EoS failed to converge for the Yarborough mixture beyond a pressure of 10 MPa, which exemplifies the difficulties associated with the modelling of multicomponent mixtures at high pressures.

The mismatch between experiments and MC data for some of the components can be attributed to the inadequacy of the molecular models (i.e., force fields) to accurately describe: (1) the pure component properties (e.g., vapour pressures), and (2) the cross-interactions using the simple Lorentz–Berthelot mixing rules. For example, the force field of alkanes slightly overpredicts the vapour pressures [35,36], which explains the overestimation of the gas-phase compositions and the K -values. The solubility of CO₂ in alkanes in the liquid-phase is generally overestimated by the TraPPE-UA [44] force field and other UA


Table 1. Molecular weights (MW), critical parameters (T_c , P_c) [31], acentric factors (ω) [31] and the initial composition of the studied mixtures. Mix 1 corresponds to the six-component system of Kalra and Robinson [16], and Mix 2 corresponds to the nine-component mixture of Yarborough [17].

Component	MW/g/mol	T_c /K	P_c /MPa	ω	Mix 1 ^a	Mix 2
N ₂	28.01	126.2	3.398	0.037	0.077	0.030
CH ₄	16.04	190.6	4.599	0.011	0.712	0.718
CO ₂	44.01	304.1	7.374	0.225	0.019	0.030
C ₂ H ₆	30.07	305.3	4.872	0.099	0.066	0.046
H ₂ S	34.08	373.4	8.963	0.090	0.099	0.030
C ₃ H ₈	44.10	369.8	4.248	0.152	0.028	0.025
n-C ₅ H ₁₂	72.15	469.7	3.370	0.252		0.053
n-C ₇ H ₁₆	100.21	540.2	2.740	0.350		0.038
n-C ₁₀ H ₂₂	142.29	617.8	2.110	0.490		0.030

^aEstimated from reported molar volumes and phase compositions.

Table 2. Comparison of the K -values computed from the MC simulations and the Wilson equation for the Yarborough mixture (Mix 2) at 310.9 K and 3.65 MPa.

Component	$K_i^{\text{exp.}}$	$K_i^{\text{sim.}}$	K_i^{Wilson}
N ₂	13.8	14.3	25.4
CH ₄	5.1	5.9	10.3
CO ₂	2.8	2.1	2.3
C ₂ H ₆	1.3	1.6	1.5
H ₂ S	1.1	0.8	0.8
C ₃ H ₈	0.45	0.68	0.36
n-C ₅ H ₁₂	0.059	0.12	0.030
n-C ₇ H ₁₆	0.008	0.022	0.004
n-C ₁₀ H ₂₂	0.0005	0.002	0.0002

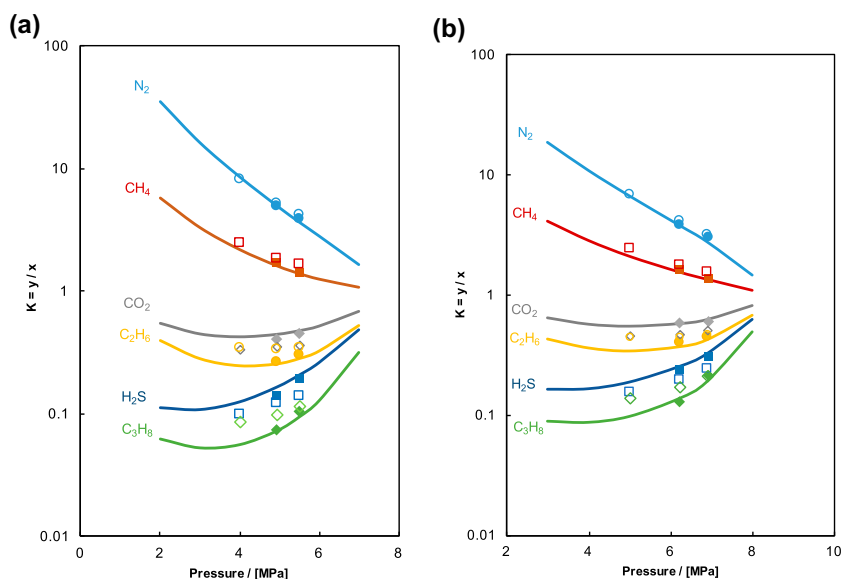**Figure 2.** (Colour online) Comparison of K -values from experiments (closed symbols), MC simulations (open symbols) and GERG-2008 EoS modelling (lines) at (a) 213.7 K and (b) 227.6 K for the mixture of Kalra and Robinson (Mix 1) [16]. Error bars of the simulation results are smaller than the symbol size.

force fields [45,46], which also explains the underprediction of the K -values in the MC simulations. Similarly, the TraPPE-UA force field overestimates the liquid-phase solubility of alkanes in alkanes [35,47,48], which consequently result in the overprediction of the K -values, e.g. for n-pentane, n-heptane and n-decane. We note that the explicit-hydrogen version of the TraPPE force field (TraPPE-EH) for alkanes yields a better description of vapour pressures and VLE of CO₂, H₂S, CH₄ and higher alkane mixtures [36,37,43,49,50]. However, the TraPPE-EH force field for the current study would be computationally too expensive, since every methane molecule would have four

additional interaction sites, while higher alkanes would have $2n + 2$ additional sites, where n is the number of carbon atoms. Considering that we have more than 1000 molecules (mainly methane, but also a considerable fraction of higher alkanes) and that the computational time scales with $\sim N^2$, where N is the number of interaction sites, it is clear that the computational time would increase significantly. The computational time for the VLE calculations of the Yarborough mixture was approximately four weeks on a Xeon-E52620 machine.

Furthermore, the Lorentz–Berthelot mixing rules [38], which are similar to the van der Waals mixing rules without binary

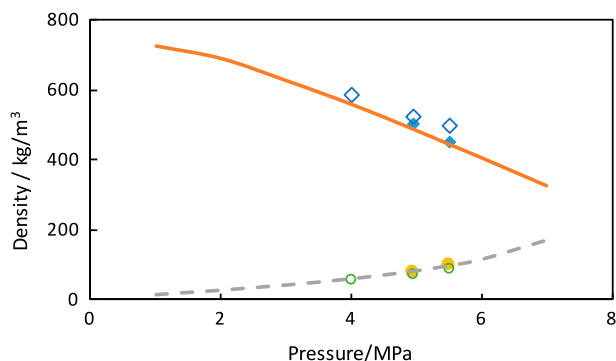


Figure 3. (Colour online) Comparison of coexistence densities from experiments (closed symbols), MC simulations (open symbols) and GERG-2008 EoS modelling (lines) at 213.7 K for the mixture of Kalra and Robinson (Mix 1) [16].

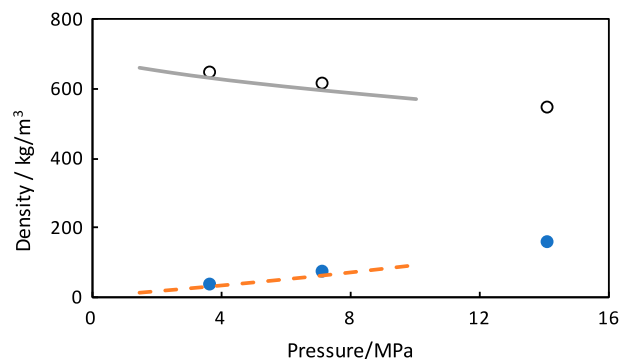


Figure 5. (Colour online) Comparison of coexistence densities from MC simulations (open symbols) and GERG-2008 EoS modelling (lines) at 310.9 K for the mixture of Yarborough (Mix 2) [17]. The GERG-2008 EoS did not converge for pressures beyond 10 MPa.

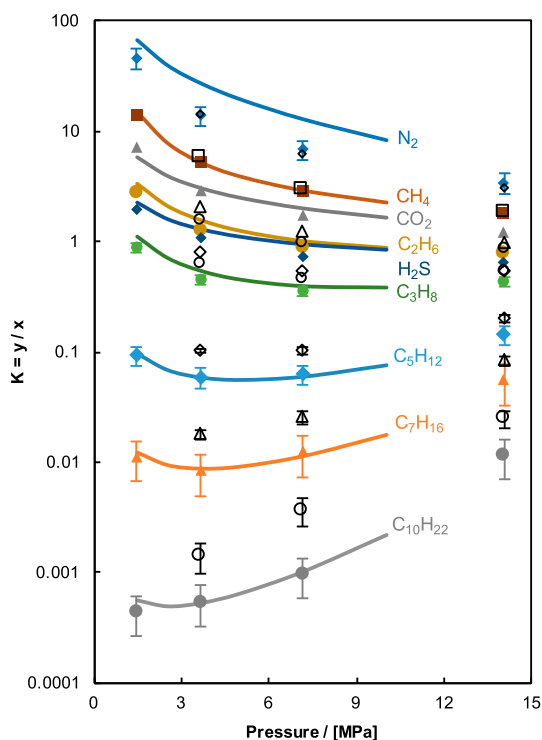


Figure 4. (Colour online) Comparison of K -values from experiments (closed symbols), MC simulations (open symbols) and GERG-2008 EoS modelling (lines) at 310.9 K for the mixture of Yarborough (Mix 2) [17]. The GERG-2008 EoS did not converge for pressures beyond 10 MPa. Error bars are only shown for nitrogen and the higher alkanes, as for the other components the error bars are smaller than the symbol size.

interaction parameters [51], might not be adequate to describe such a complex asymmetric system. However, it is generally difficult to use a different mixing rule, since the force field parameters are typically fitted in combination with the Lorentz–Berthelot mixing rules, which would require re-fitting of all parameters. Another cause of uncertainty in the simulations is introduced using a relatively small system size to reduce the computational time. As a consequence, the number of molecules in the liquid-phase for a low-soluble component (e.g., N_2), and the number of molecules in the gas-phase for a low-volatile component (e.g., $C_{10}H_{22}$) is relatively small. This issue can only be solved using a relatively large number of molecules, which

is computationally prohibitive. In order to reduce computational time, the recently coarse-grained force fields developed by Herdes et al. [52] to model natural gas systems might be promising. In Table 2, we compare the K -values from experiments, the Wilson method and the MC simulations. The Wilson equation is known to yield poor results for super-critical components, non-hydrocarbons, high pressures and relatively large alkanes. However, the Wilson equation or any other K -value correlations can be useful to setup Gibbs ensemble simulations. Overall, these results show that molecular simulation can be useful to natural gas engineers.

4. Conclusion

Vapour–liquid equilibrium data (i.e., PT_{xy} , PT_x and PT_y) are extremely important in natural gas processing. PT_{xy} data can be obtained from sampling experiments, but it is a challenging task for multicomponent mixtures. Bubble-point (PT_x) or dew-point (PT_y) measurements are easier to perform, but do not provide tie-line information. Typically, the unknown gas-phase or liquid-phase composition is computed from an equation of state by fitting bubble-point or dew-point data. Alternatively, molecular simulations can be used to compute the VLE of mixtures. Here, we used Monte Carlo Simulations in the Gibbs ensemble to compute the VLE of a six-component and a nine-component natural gas mixture using standard force fields from the literature. The PT_{xy} data from the MC simulations are compared with available experimental data and GERG-2008 equation of state modelling. Overall, a good agreement between experiments, EoS modelling and MC simulations is observed. Guidelines are provided to setup multicomponent Gibbs ensemble simulations without using equations of state or experimental data.

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This work was sponsored by NWO Exacte Wetenschappen (Physical Sciences) for the use of supercomputer facilities, with financial support from

the Nederlandse Organisatie voor Wetenschappelijk Onderzoek (Netherlands Organisation for Scientific Research, NWO). TJHV acknowledges NWO-CW (Chemical Sciences) for a VICI grant.

ORCID

M. Ramdin  <http://orcid.org/0000-0002-8476-7035>

S. H. Jamali  <http://orcid.org/0000-0002-4198-0901>

T. M. Becker  <http://orcid.org/0000-0002-6601-4320>

T. J. H. Vlugt  <http://orcid.org/0000-0003-3059-8712>

References

- Whiston C, Brulé M. Phase behavior. Vol. 20. Richardson: Henry L. Doherty memorial fund of AIME, Society of Petroleum Engineers; 2000.
- Danesh A. PVT and phase behaviour of petroleum reservoir fluids. Amsterdam: Elsevier Science; 1998.
- Faramawy S, Zaki T, Sakr AAE. Natural gas origin, composition, and processing: a review. *J Nat Gas Sci Eng*. 2016;34:511–516.
- Dohrn R, Fonseca JMS, Peper S. Experimental methods for phase equilibria at high pressures. *Annu Rev Chem Biomol Eng*. 2012;3:343–67.
- Weir R, de Loos TW. Measurement of the thermodynamic properties of multiple phases. 1st ed. Amsterdam: Elsevier; 2005.
- Gernert J, Jäger A, Span R. Calculation of phase equilibria for multi-component mixtures using highly accurate Helmholtz energy equations of state. *Fluid Phase Equilib*. 2014;375:209–218.
- Michelsen ML. The isothermal flash problem. Part I. Stability. *Fluid Phase Equilib*. 1982;9:1–19.
- Michelsen ML. The isothermal flash problem. Part II. Phase-split calculation. *Fluid Phase Equilib*. 1982;9:21–40.
- Michelsen M. Calculation of multiphase equilibrium. *Comput Chem Eng*. 1994;18:545–550.
- Skylogianni E, Novak N, Louli V, et al. Measurement and prediction of dew points of six natural gases. *Fluid Phase Equilib*. 2016;424:8–15.
- Valiollahi S, Kavianpour B, Raeissi S, et al. A new peng-robinson modification to enhance dew point estimations of natural gases. *J Nat Gas Sci Eng*. 2016;34:1137–1147.
- Petropoulou E, Pappa GD, Voutsas E. Modelling of phase equilibrium of natural gas mixtures containing associating compounds. *Fluid Phase Equilib*. 2017;433:135–148.
- Jaubert J, Privat R, Mutelet F. Predicting the phase equilibria of synthetic petroleum fluids with the ppr78 approach. *AIChE J*. 2010;56:3225–3235.
- Panagiotopoulos AZ. Direct determination of phase coexistence properties of fluids by Monte Carlo simulation in a new ensemble. *Mol Phys*. 1987;61:813–826.
- Panagiotopoulos AZ, Quirke N, Stapleton M, et al. Phase equilibria by simulation in the Gibbs ensemble. *Mol Phys*. 1988;63:527–545.
- Kalra H, Robinson DB. Vapor-liquid equilibrium in a six-component simulated sour natural gas system at sub-ambient temperatures. *Fluid Phase Equilib*. 1979;3:133–144.
- Yarborough L. Vapor-liquid equilibrium data for multicomponent mixtures containing hydrocarbon and nonhydrocarbon components. *J Chem Eng Data*. 1972;17:129–133.
- Ramdin M, Balaji SP, Vicent-Luna JM, et al. Computing bubble-points of CO₂/CH₄ gas mixtures in ionic liquids from Monte Carlo simulations. *Fluid Phase Equilib*. 2016;418:100–107.
- Ramdin M, Becker TM, Jamali SH, et al. Computing equation of state parameters of gases from monte carlo simulations. *Fluid Phase Equilib*. 2016;428:174–181.
- Ungerer P, Lachet V, Tavitian B. Applications of molecular simulation in oil and gas production and processing. *Oil Gas Sci Technol - Rev l'IFP*. 2006;61:387–403.
- Ungerer P, Nieto-Draghi C, Lachet V, et al. Molecular simulation applied to fluid properties in the oil and gas industry. *Mol Simul*. 2007;33:287–304.
- Ungerer P, Nieto-Draghi C, Rousseau B, et al. Molecular simulation of the thermophysical properties of fluids: from understanding toward quantitative predictions. *J Mol Liq*. 2007;134:71–89; eMLG/JMLG 2005 Special Issue Annual Meeting of the EMLG/MLG 2005.
- Neubauer B, Tavitian B, Boutin A, et al. Molecular simulations on volumetric properties of natural gas. *Fluid Phase Equilib*. 1999;161:45–62.
- Li Y, Yu Y, Zheng Y, et al. Vapor-liquid equilibrium properties for confined binary mixtures involving CO₂, CH₄, and N₂ from Gibbs ensemble Monte Carlo simulations. *Sci China Chem*. 2012;55:1825–1831.
- Budhathoki S, Shah JK, Maginn EJ. Molecular simulation study of the performance of supported ionic liquid phase materials for the separation of carbon dioxide from methane and hydrogen. *Ind Eng Chem Res*. 2017;56:6775–6784.
- Kunz O, Wagner W. The GERG-2008 wide-range equation of state for natural gases and other mixtures: an expansion of GERG-2004. *J Chem Eng Data*. 2012;57:3032–3091.
- Frenkel D, Smit B. Understanding molecular simulation: from algorithms to applications. 2nd ed. London: Academic Press; 2002.
- Prausnitz J, Lichtenthaler R, de Azevedo E. Molecular thermodynamics of fluid-phase equilibria. Harlow: Pearson Education; 1998.
- Martin MG, Siepmann JI. Novel configurational-bias Monte Carlo method for branched molecules. Transferable potentials for phase equilibria. 2. United-atom description of branched alkanes. *J Phys Chem B*. 1999;103:4508–4517.
- Panagiotopoulos AZ. Monte Carlo methods for phase equilibria of fluids. *J Phys Condens Matter*. 2000;12:R25–R52.
- Poling BE, Prausnitz JM, O'Connell JP. The properties of gases and liquids. 5th ed. New York (NY): McGraw-Hill; 2001.
- Wilson G. A modified Redlich-Kwong equation of state applicable to general physical data calculations. 65th AIChE National Meeting; 1968; Cleveland, OH.
- Ahmed T. Equations of state and pvt analysis: applications for improved reservoir modeling. Cambridge (MA): Elsevier; 2016.
- Almeida R. Improved K-value correlation for UAE crude oil components at high pressures using PVT laboratory data. *Fuel*. 2003;82:1057–1065.
- Martin MG, Siepmann JI. Transferable potentials for phase equilibria. 1. United-atom description of n-alkanes. *J Phys Chem B*. 1998;102:2569–2577.
- Potoff JJ, Siepmann JI. Vapor-liquid equilibria of mixtures containing alkanes, carbon dioxide, and nitrogen. *AIChE J*. 2001;47:1676–1682.
- Shah MS, Tsapatsis M, Siepmann JI. Development of the transferable potentials for phase equilibria model for hydrogen sulfide. *J Phys Chem B*. 2015;119:7041–7052.
- Allen MP, Tildesley DJ. Computer simulation of liquids. New York (NY): Oxford University Press; 1989.
- Dinpajoo M, Bai P, Allan DA, et al. Accurate and precise determination of critical properties from Gibbs ensemble Monte Carlo simulations. *J Chem Phys*. 2015;143:114113-1–114113-13.
- Cortés Morales AD, Economou IG, Peters CJ, et al. Influence of simulation protocols on the efficiency of Gibbs ensemble Monte Carlo simulations. *Mol Simul*. 2013;39:1135–1142.
- Dubbeldam D, Calero S, Ellis DE, et al. RASPA: molecular simulation software for adsorption and diffusion in flexible nanoporous materials. *Mol Simul*. 2016;42:81–101.
- Dubbeldam D, Torres-Knoop A, Walton KS. On the inner workings of Monte Carlo codes. *Mol Simul*. 2013;39:1253–1292.
- Chen B, Siepmann JI. Transferable potentials for phase equilibria. 3. Explicit-hydrogen description of normal alkanes. *J Phys Chem B*. 1999;103:5370–5379.
- Zhang L, Siepmann JI. Pressure dependence of the vapor-liquid-liquid phase behavior in ternary mixtures consisting of n-alkanes, n-perfluoroalkanes, and carbon dioxide. *J Phys Chem B*. 2005 Feb;109:2911–2919.
- Delhommelle J, Boutin A, Fuchs AH. Molecular simulation of vapour-liquid coexistence curves for hydrogen sulfide-alkane and carbon dioxide-alkane mixtures. *Mol Simul*. 1999;22:351–368.

- [46] Cui ST, Cochran HD, Cummings PT. Vapor-liquid phase coexistence of alkane-carbon dioxide and perfluoroalkane-carbon dioxide mixtures. *J Phys Chem B*. 1999;103:4485–4491.
- [47] Nath SK, Escobedo FA, de Pablo JJ. On the simulation of vapor-liquid equilibria for alkanes. *J Chem Phys*. 1998;108:9905–9911.
- [48] Nath SK, Escobedo FA, de Pablo JJ, et al. Simulation of vapor-liquid equilibria for alkane mixtures. *Ind Eng Chem Res*. 1998;37:3195–3202.
- [49] Kamath G, Lubna N, Potoff JJ. Effect of partial charge parametrization on the fluid phase behavior of hydrogen sulfide. *J Chem Phys*. 2005;123:124505-1–124505-7.
- [50] Kamath G, Potoff JJ. Monte Carlo predictions for the phase behavior of $\text{H}_2\text{S}+\text{n-alkane}$, $\text{H}_2\text{S}+\text{CO}_2$, CO_2+CH_4 and $\text{H}_2\text{S}+\text{CO}_2+\text{CH}_4$ mixtures. *Fluid Phase Equilib*. 2006;246:71–78.
- [51] Smit B, Cox KR. A new approach for calculating the accessible volume in equations of state for mixtures. I. Theory and implementation in the van der waals equation of state. *Fluid Phase Equilib*. 1988;43:171–180.
- [52] Herdes C, Totton TS, Müller EA. Coarse grained force field for the molecular simulation of natural gases and condensates. *Fluid Phase Equilib*. 2015;406:91–100.