



2008-03-13

Evaluation of the Applicability of the Interactive Highway Safety Design Model to Safety Audit of Two-Lane Rural Highways

Kaitlin Chuo

Brigham Young University - Provo

Follow this and additional works at: <https://scholarsarchive.byu.edu/etd>

 Part of the [Civil and Environmental Engineering Commons](#)

BYU ScholarsArchive Citation

Chuo, Kaitlin, "Evaluation of the Applicability of the Interactive Highway Safety Design Model to Safety Audit of Two-Lane Rural Highways" (2008). *All Theses and Dissertations*. 1322.

<https://scholarsarchive.byu.edu/etd/1322>

This Thesis is brought to you for free and open access by BYU ScholarsArchive. It has been accepted for inclusion in All Theses and Dissertations by an authorized administrator of BYU ScholarsArchive. For more information, please contact scholarsarchive@byu.edu, ellen_amatangelo@byu.edu.

EVALUATION OF THE APPLICABILITY OF THE INTERACTIVE
HIGHWAY SAFETY DESIGN MODEL TO SAFETY AUDITS OF
TWO-LANE RURAL HIGHWAYS

by

Kaitlin Chuo

A thesis submitted to the faculty of

Brigham Young University

in partial fulfillment of the requirements for the degree of

Master of Science

Department of Civil and Environmental Engineering

Brigham Young University

April 2008

BRIGHAM YOUNG UNIVERSITY

GRADUATE COMMITTEE APPROVAL

of a thesis submitted by

Kaitlin Chuo

This thesis has been read by each member of the following graduate committee and by majority vote has been found to be satisfactory.

Date

Mitsuru Saito, Chair

Date

Grant G. Schultz

Date

E. James Nelson

BRIGHAM YOUNG UNIVERSITY

As chair of the candidate's graduate committee, I have read the thesis of Kaitlin Chuo in its final form and have found that (1) its format, citations, and bibliographical style are consistent and acceptable and fulfill university and department style requirements; (2) its illustrative materials including figures, tables, and charts are in place; and (3) the final manuscript is satisfactory to the graduate committee and is ready for submission to the university library.

Date

Mitsuru Saito
Chair, Graduate Committee

Accepted for the Department

E. James Nelson
Graduate Coordinator

Accepted for the College

Alan R. Parkinson
Dean, Ira A. Fulton College of Engineering
and Technology

ABSTRACT

EVALUATION OF THE APPLICABILITY OF THE INTERACTIVE HIGHWAY SAFETY DESIGN MODEL TO SAFETY AUDITS OF TWO-LANE RURAL HIGHWAYS

Kaitlin Chuo

Department of Civil and Environmental Engineering

Master of Science

The Interactive Highway Safety Design Model (IHSDM) is a suite of software developed by the Federal Highway Administration (FHWA) for monitoring and analyzing two-lane rural highways in the United States. As IHSDM is a fairly “young” program a limited amount of research has been conducted to evaluate its practicability and reliability. To determine if IHSDM can be adopted into the engineering decision making process in Utah, a study was conducted under the supervision of the Utah Department of Transportation (UDOT) to evaluate its applicability to audit safety of two-lane rural highways in Utah.

IHSDM consists of six modules: Policy Review Module (PRM), Crash Prediction Module (CPM), Design Consistency Module (DCM), Traffic Analysis Module (TAM), Intersection Review Module (IRM), and Driver/Vehicle Module (DVM) (still under construction). Among the six modules, two were chosen for evaluation because of their applicability to audit safety of the two-lane rural highways in Utah, namely CPM and IRM.

For the evaluation of the CPM, three two-lane rural highway sections were selected. The results of this evaluation show that the CPM can produce reasonably reliable crash predictions if appropriate input data, especially alignment data, reflect the existing conditions at reasonable accuracy and engineering judgment is used. Using crash records available from UDOT's crash database and CPM's crash prediction capability, UDOT's traffic and safety engineers can locate "hot spots" for detailed safety audit, thus making the safety audit task more focused and effective.

Unlike the CPM, the outputs of the IRM are qualitative and include primarily suggestions and recommendations. They will help the traffic and safety engineers identify what to look for as they visit the sites, such as a lack of stopping sight distance and a lack of passing sight distance. The interpretation of the IRM requires knowledge of various aspects of highway design, familiarity with *A Policy on Geometric Design of Highways and Streets* by the American Association of State Highway and Transportation Officials (AASHTO), and experience in traffic engineering.

Based on the findings of the study, it is concluded that the CPM and IRM of IHSDM could be a useful tool for engineering decision-making during safety audits of two-lane rural highways. But the outputs from these modules demand knowledge and experience in highway design. It is recommended that the other modules of IHSDM be tested to fully appreciate the capability of IHSDM. The software can be a knowledge-based program that can help novice engineers to learn how to design safe two-lane rural highways.

ACKNOWLEDGMENTS

First of all I wish to thank my dear parents, Sherry and Jefferson, who helped me to pursue my education and my dreams. They have been great examples for me both professionally and ethically throughout my life. A special thanks goes to my advisor, Dr. Mitsuru Saito, who supervised me throughout the research, and made a tremendous effort in helping me write my thesis.

I am grateful for Mr. Mike Dimaiuta, the IHSDM program manager at FHWA, and his co-workers for providing me the training in the software and patiently answering all my questions concerning IHSDM. I also appreciate the suggestions, recommendations, and help from several UDOT engineers, including Doug Anderson, Troy Peterson, Robert Hull, John Leonard, Tam Southwick, Doug Bassett, Troy Torgersen, Darin Duersch, and Danielle Herrscher. I especially want to express my gratitude to Johanna Howard of UDOT Region 3, who helped me to overcome the difficulties in creating alignments for study sections using the InRoads software, and Monte Warr and Jeff Ericson, UDOT's photolog specialists, for providing me the GPS data necessary for the research.

I also thank the members of my committee: Dr. Grant G. Schultz, who was always willing to provide me guidance, and Dr. E. James Nelson, who taught me about converting GPS data into the format that was readable by InRoads. Additionally, I thank Michael Mosley for writing the manual for creating alignments using limited terrain data by InRoads, which had helped me to create surrogate centerline alignments for the study sections whose design plans were not available.

Finally, but not the least, I would also like to thank my classmates and friends who offered me help when I encountered obstacles and gave me much needed moral support.

TABLE OF CONTENTS

LIST OF TABLES	xi
LIST OF FIGURES	xiii
1 Introduction.....	1
1.1 Purpose and Scope of the Study	1
1.2 The Current Application of IHSDM.....	2
1.3 Organization of the Thesis	4
2 Literature Research	5
2.1 The Overview of IHSDM	6
2.1.1 Policy Review Module (PRM).....	7
2.1.2 Crash Predication Module (CPM)	7
2.1.3 Design Consistency Module (DCM)	10
2.1.4 Traffic Analysis Module (TAM)	10
2.1.5 Intersection Review Module (IRM).....	11
2.1.6 Driver/Vehicle Module (DVM)	11
2.2 Literature Research.....	12
2.3 Chapter Summary	12
3 Analysis Procedure	15
3.1 Data Collection	16
3.2 Obtaining Geometric Data	17
3.3 Other Required Data for CPM.....	17

3.4	Entering Data into IHSDM.....	18
3.5	Chapter Summary	20
4	Application of CPM to Selected Highway Sections	21
4.1	US-40 Study Section.....	23
4.1.1	Current Conditions of the US-40 Study Section.....	23
4.1.2	Centerline Alignments of the US-40 Study section.....	25
4.1.3	Crash Prediction Results of the US-40 Study Section	27
4.1.4	Analysis of Crash Prediction Results of the US-40 Study Section.....	37
4.2	US-6 Study Section.....	45
4.2.1	Current Condition of the US-6 Study Section	46
4.2.2	Centerline Alignments of the US-6 Study Section	47
4.2.3	Crash Prediction Results of the US-6 Study Section	49
4.2.4	Analysis of Crash Prediction Results of the US-6 Study Section.....	57
4.3	SR-150 Study Section.....	59
4.3.1	Current Condition of the SR-150 Study Section.....	59
4.3.2	Centerline Alignments of SR-150 Study Section	61
4.3.3	Crash Prediction Results of the SR-150 Study Section	68
4.3.4	Analysis of Crash Prediction Results of the SR-150 Study Section.....	80
4.4	Chapter Summary	82
5	Application of IRM to Selected Intersections.....	85
5.1	Need for IRM.....	85
5.2	Application of IRM to the Intersections of US-6, SR-174, and SR-136	85
5.2.1	Current Conditions of the Intersections	87
5.2.2	Alignments of US-6, SR-174, and SR-136.....	88
5.2.3	Analysis of the IRM Results	93

5.3	Chapter Summary	96
6	Conclusions and Recommendation.....	97
6.1	Conclusions.....	98
6.2	Recommendations.....	99
	References.....	101
	Appendix.....	103

LIST OF TABLES

Table 1-1: Engineering Projects that Adopted IHSDM	3
Table 4-1: Three Highway Sections Selected for Analysis	21
Table 4-2: The Horizontal Alignment of the US-40 Study Section (MP 35 to MP 45).....	26
Table 4-3: Vertical Alignment of the US-40 Study Section (MP 35 to MP 45).....	27
Table 4-4: Crash Prediction Results for the US-40 Study section (Number of Crashes)	28
Table 4-5: Statistical Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of US-40 Study Section.....	32
Table 4-6: Crash Prediction Results for the US-40 Study Section (Crashes/MVMT)	33
Table 4-7: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of US-40 Study Section.....	36
Table 4-8: Crash History Summary of the US-40 Study Section, MP 35-MP 45 (2003-2005)	38
Table 4-9: Horizontal Alignment of the US-6 Study Section.....	47
Table 4-10: Vertical Alignments of US-6 Study Section	48
Table 4-11: Crash Prediction Results for the US-6 Study Section (Number of Crashes)	50
Table 4-12: Statistics Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of US-6 Study Section.....	53
Table 4-13: Crash Prediction Results for US-6 Study Sections, MP 22-MP 28 (crashes/MVMT)	53

Table 4-14: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of US-6 Study Section.....	57
Table 4-15: Crash History Summary of the US-6 Study Section, MP 22-MP28 (2003-2005).....	58
Table 4-16: Horizontal Alignment of the SR-150 Study Section.....	61
Table 4-17: Vertical Alignment of the SR-150 Study Section.....	63
Table 4-18: Crash Prediction Results for SR-150 Study Section, MP 0.7-MP 16.4 (Number of Crashes).....	68
Table 4-19: Statistics Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of SR-150 Study Section.....	74
Table 4-20: Crash Prediction Results for SR-150 MP 0.7-MP 16.4 (Crashes/MVMT)....	74
Table 4-21: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of SR-150 Study Section.....	80
Table 4-22: Crash History Summary of the US-150 Study Section, MP 0.7-MP 16.4 (2003-2005).....	81
Table 5-1: Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1.....	89
Table 5-2: Vertical Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1.....	90
Table 5-3: Diagnostic Summary of the Intersection at US-6 and SR-174.....	93
Table 5-4: Diagnostic Summary of the Intersection at US-6 and SR-136.....	94

LIST OF FIGURES

Figure 2-1: IHSDM Screenshot	6
Figure 2-2: Summary Chart of IHSDM's Six Modules.....	13
Figure 3-1: Flowchart of Analysis Steps	16
Figure 3-2: Illustration of a Data-Collecting Vehicle (Mandli 2007).....	17
Figure 3-3: Screen Shot Showing the Location of the Geometric Alignment Assistant Spreadsheets	18
Figure 3-4: Data Entry Assistant Pop-Up Window	19
Figure 3-5: Screenshot of the Highway Editor of IHSDM.....	20
Figure 4-1: Locations of the Three Selected Two-Lane Rural Highway Sections.....	22
Figure 4-2: Photos of the US-40 Study Section in Summer 2005	23
Figure 4-3: Photos of the US-40 Study Section in Winter 2006	24
Figure 4-4: Location of the US-40 Study Section	24
Figure 4-5: Surrogate Horizontal Alignment of the US-40 Study Section with Mileposts.....	25
Figure 4-6: Plot of CPM Prediction Results of the US-40 Study Section (Number of Crashes), MP 35-MP 45 (2006-2008), Analyzed with Crash History	30
Figure 4-7: Plot of CPM Prediction Results of US-40 Study Section (Number of Crashes), MP 35-MP 45 (2006-2008), Analyzed without Crash History	30
Figure 4-8: Plot of Crash History of US-40 Study Section (Number of Crashes), MP 35-MP 45 (2003-2005).....	31
Figure 4-9: Plot of the Difference Between the CPM Results of US-40 Study Section in Number of Crashes Analyzed With and Without Crash History.....	31

Figure 4-10: Plot of CPM Prediction Results of the US-40 Study Section (Crashes/MVMT), MP 35-MP 45 (2006-2008), Analyzed with Crash History.....	34
Figure 4-11: Plot of CPM Prediction Results of the US-40 Study Section (Crashes/MVMT), MP 35-MP 45 (2006-2008), Analyzed without Crash History	35
Figure 4-12: Plot of Crash History of US-40 Study Section (Crashes/MVMT), MP 35-MP 45 (2003-2005).....	35
Figure 4-13: Plot of the Difference Between the CPM Results of US-40 Study Section in Crashes/MVMT Analyzed With and Without Crash History.....	36
Figure 4-14: Plot of Crashes with Wild Animals in the US-40 Study Section from 2003 to 2005	42
Figure 4-15: Plot of Non-Animal Crashes in the US-40 Study Section, From 2003 to 2005.....	43
Figure 4-16: Plot of Non-Animal Crashes by Direction in the US-40 Study Section, 2003 to 2005	43
Figure 4-17: Vertical Alignment of the US-40 Study Section.....	44
Figure 4-18: "Hot Spots" of US-40 Study Section	45
Figure 4-19: Photos of the US-6 Study Section in Summer 2005	46
Figure 4-20: Photos of the US-40 Study Section in Fall 2007	47
Figure 4-21: Location of the US-6 Study Section	47
Figure 4-22: Surrogate Horizontal Alignment of the US-6 Study Section with Mileposts.....	49
Figure 4-23: Plot of CPM Prediction Results of the US-6 Study Section (Number of Crashes), MP 22-MP 28 (2006-2008), Analyzed with Crash History.....	51
Figure 4-24: Plot of CPM Prediction Results of the US-6 Study Section (Number of Crashes), MP 22-MP 28 (2006-2008), Analyzed without Crash History.....	51
Figure 4-25: Plot of Crash History of US-6 Study Section (Number of Crashes), MP 22-MP 28 (2003-2005).....	52
Figure 4-26: Plot of the Difference Between the CPM Results of US-6 Study Section in Number of Crashes Analyzed With and Without Crash History.....	52

Figure 4-27: Plot of CPM Prediction Results of the US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2006-2008), Analyzed with Crash History.....	55
Figure 4-28: Plot of CPM Prediction Results of the US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2006-2008), Analyzed without Crash History	55
Figure 4-29: Plot of Crash History of US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2003-2005).....	56
Figure 4-30: Plot of the Difference Between the CPM Results of US-6 Study Section in Crashes/MVMT Analyzed With and Without Crash History.....	56
Figure 4-31: Photos of the SR-150 Study Section in Summer 2005	60
Figure 4-32: Photos of the SR-150 Study Section in Fall 2007.....	60
Figure 4-33: Location of the SR-150 Study Section.....	60
Figure 4-34: Surrogate horizontal Alignment of the SR-150 Study Section with Mileposts.....	68
Figure 4-35: Plot of CPM Prediction Results of the SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2006-2008), Analyzed with Crash History	72
Figure 4-36: Plot of CPM Prediction Results of the SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2006-2008), Analyzed without Crash History	72
Figure 4-37: Plot of Crash History of SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2003-2005).....	73
Figure 4-38: Plot of the Difference Between the CPM Results of SR-150 Study Section in Number of Crashes Analyzed With and Without Crash History.....	73
Figure 4-39: Plot of CPM Prediction Results of the SR-150 Study Section (Crashes/MVMT), MP 0.7-MP 16.4 (2006-2008), Analyzed with Crash History.....	78
Figure 4-40: Plot of CPM Prediction Results of the SR-150 Study Section (Crashes/MVMT), MP 0.7-MP 16.4 (2006-2008), Analyzed without Crash History	78
Figure 4-41: Plot of Crash History of SR-150 Study Section (Crashes/MVMT), MP 0.7-MP 16.4 (2003-2005).....	79

Figure 4-42: Plot of the Difference Between the CPM Results of SR-150 Study
Section in Crashes/MVMT Analyzed With and Without Crash History.....79

Figure 5-1: Location of the Intersections of US-6, SR-174, and SR-136.....86

Figure 5-2: Plot of the Intersections of US-6, SR-174, and SR-13687

Figure 5-3: Photos of the Intersections, during summer 2005.....88

Figure 5-4: Photos of the Intersections, during winter 200788

1 Introduction

Due to the importance of rural highways and the role they play in state's highway network, monitoring their safety has been a major task for transportation engineers in the United States. Throughout time, transportation engineers have been using different methods available to them to conduct safety audits of rural highways. As the population grows and as the trips made on rural highways increases, a more advanced, systematic method of monitoring the safety of rural highways is urgently needed. The Federal Highway Administration (FHWA) recognized this need and developed a suite of software programs called the Interactive Highway Safety Design Model (IHSDM) in order to provide digital assistance for analyzing safety problems of existing and planned rural two-lane highways.

1.1 Purpose and Scope of the Study

Reducing crashes on highways has always been one of the most important tasks for transportation engineers while they are in the process of planning, design, construction, and maintenance. Providing a safe driving environment is indeed not only a responsibility, but also the highest priority for all highway projects.

Traditionally transportation engineers have to manually check their design to see if all the values used for design are in compliance with all the federal, state, and local policies, or if average drivers and pedestrians could comprehend their design. FHWA recognized the deficiency of the traditional method and the need for a more systematic method that assists transportation engineers using modern technologies, and began developing IHSDM in 1995. A concise description of IHSDM is posted in its official website, "IHSDM is a decision-support tool. It checks existing or proposed two-lane rural

highway designs against relevant design policy values and provides estimates of a design's expected safety and operational performance. IHSDM results support decision making in the highway design process," (FHWA 2006). As IHSDM was further developed, the Utah Department of Transportation (UDOT) decided to evaluate IHSDM to see if it could be incorporated in their safety audit program for two-lane rural highways.

A Road Safety Audit (RSA) is "the formal safety performance examination of an existing or future road or intersection by an independent, multidisciplinary team. It qualitatively estimates and reports on potential road safety issues and identifies opportunities for improvements in safety for all road users," (FHWA 2008). The goal of an RSA is to answer the following two questions (FHWA 2008):

- What elements of the road may present a safety concern: to what extent, to which road users, and under what circumstances?
- What opportunities exist to eliminate or mitigate identified safety concerns?

The purpose for this research is to evaluate the capability of IHSDM in helping transportation engineers to locate highway segments with high crash rates and to predict crash rates for improvement alternatives. After discussing the research with the members of the Technical Advisory Committee (TAC), which was set up for the study and consisted of selected UDOT engineers, two IHSDM modules were selected for evaluation: the Crash Prediction Module (CPM) and the Intersection Review Module (IRM).

The scope of this study includes the analysis of three two-lane rural highway sections by CPM and two intersections by IRM in order to test their applicability to UDOT's safety audit process. Some of the selected highway segments have had significantly high crash rates; therefore, this study also provides UDOT engineers an evaluation of these problematic highway sections.

1.2 The Current Application of IHSDM

UDOT is not the first public agency to recognize the potential use of IHSDM. There have been several engineering projects that have adopted IHSDM in their safety

evaluations. Mike Dimaiuta, the IHSDM development project manager at the Turner-Fairbank Highway Research Center in McLean, Virginia (Dimaiuta 2006), provided the author of this thesis a list of state DOTs and other organizations that have already utilized IHSDM to enhance the safety of two-lane rural highways. Table 1-1 lists some of the engineering projects that have used IHSDM.

Table 1-1: Engineering Projects that Adopted IHSDM

Project Name	Organization(s)	Web Address
Fernan Lake Road Improvement Project	FHWA Western Federal Land	http://www.wfl.fhwa.dot.gov/projects/fernan/
US 119 Pine Mountain Improvements	Kentucky Transportation Center for the Kentucky Transportation Cabinet	http://www.ktc.uky.edu/Reports/KTC_04_31_FR121_02_2I.pdf
Statewide Projects	Washington Department of Transportation	http://www.wsdot.wa.gov/eesc/design/ihsdm/
Indian Reservation Roads (IRR) Database and Model Development, Task 7	Mountain-Plains Consortium (MPC)	http://www.mountain-plains.org/research/2006proj/index.php?proj=MPC-3
Road Safety Audits: The FHWA Case Study Program	Hamilton Associates, BMI and FHWA	http://www.gdhamilton.com/resources/TRB06.pdf
Application of the IHSDM: A Case Study	Kittelson & Associates, Inc.	http://pubsindex.trb.org/document/view/default.asp?lbid=760602
Highway 26 Road Safety and Operational Review	Delphi-MRC	http://www.delphimrc.com/searchpro/index.php?q=IHSDM&search=Search

In these projects, IHSDM was used mostly to evaluate road geometric design and perform crash prediction analysis. For example, the US-119 Pine Mountain Improvements Project used IHSDM to evaluate the safety of the road after implementing changes in alignments, and the road safety audits conducted by the FHWA Case Study Program also utilized the features of IHSDM to conduct safety audits.

1.3 Organization of the Thesis

Chapter 1 introduces the objectives and procedures taken in the study. Chapter 2 presents the findings from the literature review conducted as part of the study to provide readers with some background knowledge and the structure of IHSDM. Chapter 3 discusses the analysis procedures developed specifically for the study. Chapter 4 records the findings from the CPM evaluation of the three two-lane rural highway sections, followed by Chapter 5 which presents the results of the application of the IRM module for two rural intersections. Finally, Chapter 6 presents conclusions and recommendations.

2 Literature Research

IHSDM was developed by the Safety Research and Development Program of FHWA. The purpose of IHSDM is to evaluate existing and proposed two-lane rural highways by providing quantitative information to highway designers and safety engineers. Two-lane rural highways comprise 77 percent of the nation's highway systems and they account for 44 percent of the nation's fatal crashes (FHWA 2006). FHWA has developed IHSDM in an attempt to help highway engineers design safe two-lane highways and to help safety engineers efficiently analyze safety impacts of alternative designs (FHWA 2006). The latest version of IHSDM was released in December 2007 and is available for download online to the public free-of-charge. However, the version used for this study was a 2006 version, which was available at the time this study began.

During the literature search, it was recognized that there was a lack of studies that had been conducted for evaluating the applicability of IHSDM to safety audit, partially because IHSDM was relatively new to the transportation engineering community. The articles that were written about IHSDM were mainly to introduce the features of the software or validate the methods or modules contained in the program. These are undoubtedly important topics to be presented; however, for the transportation engineering community to recognize the usefulness of IHSDM more practical applications of ISHDM are needed.

2.1 The Overview of IHSDM

The overview of the IHSDM cannot be better presented than by Raymond Krammes, the highway research engineer in the Office of Safety Research & Development of FHWA (FHWA 2006):

“ IHSDM is a suite of software analysis tools for evaluating safety and operational effects of geometric design decisions on two-lane rural highways.”

Figure 2-1 shows a screenshot of IHSDM. IHSDM’s goal is to provide transportation engineers a tool that will help them design safe two-lane rural highways. IHSDM requires proper training and the understanding of highway geometric design and traffic safety issues related to two-lane rural highways. Also, IHSDM supports all major highway design software programs such as GEOPAK and CAiCE, and the engineering programs that are developed Bentley and Autodesk; alignment data can be transferred directly from these software programs into IHSDM (FHWA 2006).

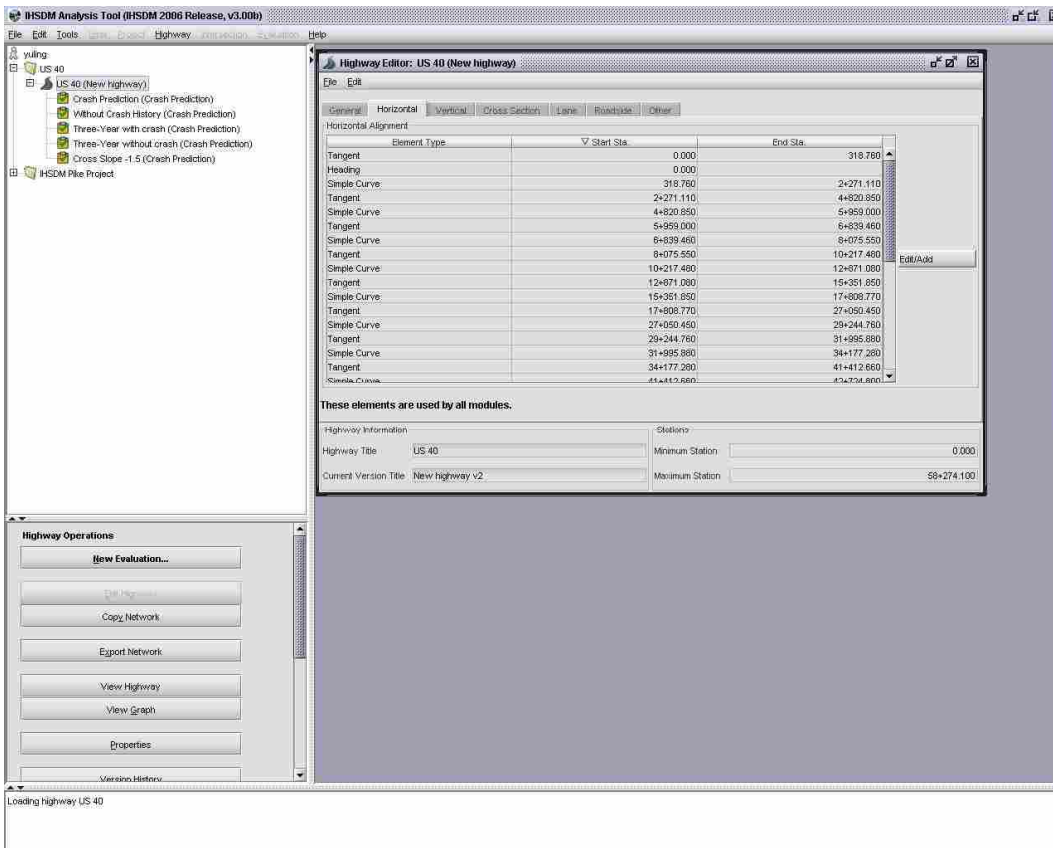


Figure 2-1: IHSDM Screenshot

The design of two-lane rural highways can be evaluated by the six modules of IHSDM: Policy Review Module, Crash Prediction Module, Design Consistency Module, Traffic Analysis Module, Intersection Review Module, and Driver/Vehicle Module. The user does not need to use all of these modules. Depending on the objective of evaluation, the user can select the modules he or she needs. Each module is briefly discussed in the following subsections.

2.1.1 Policy Review Module (PRM)

The PRM module reviews the roadway design by checking the design values with the standard policies specified in *A Policy on Geometric Design of Highway and Streets* by the American Association of State Highway and Transportation Officials (AASHTO) (AASHTO 2004). The module checks four highway design categories: cross sections, horizontal alignment, vertical alignment, and sight distance. The cross section category checks the traveled way width and its cross slope, auxiliary lane width and its cross slope, shoulder width and its cross slope, cross slope rollover on curves, and bridge width. The horizontal alignment category evaluates radius of curvature, superelevation, compound curve ratio, and length of horizontal curve. The vertical alignment category verifies tangent grade length and vertical curve length. The sight distance category checks stopping sight distance, passing sight distance, and decision sight distance. Additional checks are done for clear zone, roadside slope, normal ditch design, and superelevation transition.

The PRM module is a digitized policy review that checks 1990, 1994, 2001, and 2004 versions of AASHTO's *A Policy on Geometric Design of Highway and Streets*. The module also allows users to modify some of the policy tables to reflect unique policies that differ from the AASHTO policies. However, policies that are not quantitative are not yet translated into this electronic policy check.

2.1.2 Crash Predication Module (CPM)

The CPM estimates the number and rate of crashes by evaluating the geometric design and traffic flow characteristics of two-lane rural highways. The crash prediction

algorithm consists of three components: base models, calibration factor, and accident modification factors (AMFs).

In CPM, the equations 2-1 and 2-2 are used to predict the number of crashes for highway segments (FHWA 2006):

$$N_{rs} = N_{br} C_r AMF_1 AMF_2 AMF_3 AMF_4 AMF_5 AMF_6 AMF_7 AMF_8 AMF_9 \quad (2-1)$$

$$N_{br} = (ADT_n)(L)(365)(10^{-6}) \exp(-0.4865) \quad (2-2)$$

Where:

N_{rs} = predicted number of total highway segment crashes per year,

N_{br} = predicted number of total highway segment crashes per year for nominal or base conditions,

C_r = calibration factor for highway segments,

AMF_1, \dots, AMF_9 = accident modification factors for highway segments,

ADT_n = average daily traffic volume for specified year n (veh/day),

L = length of highway segment (mi).

The crash rate is obtained by dividing N_{rs} by the exposure value expressed by $(ADT_n)(L)(10^{-6})$, resulting in crashes per million vehicle miles of travel (MVMT).

Detailed discussions of the prediction models are found in the on-line Help Documents included in the IHSDM software (FHWA 2006).

Each base model was developed and calibrated with data collected from one or two states. The AMFs further adjust the outcome of base models taking into account particular road design and traffic characteristics. For an existing highway, the empirical Bayes method is used to combine model estimations with the crash history data of the highway section under study. For further information on the specific equations and procedural guideline of CPM the reader is suggested to refer to the Engineering Manual accessed through the Help feature of the IHSDM software (FHWA 2006).

As safety is the number one priority in highway design, CPM is the most often used module, and at the same time the most controversial module of IHSDM. This concern is reflected in the bulletin board of the official support center; the majority of

concerns the center has received is about CPM (Dimaiuta 2006). One of the most important pieces of advice for CPM users, given by the IHSDM program manager, is that users recognize the fact that there is no crash prediction method, model, system, or program that can ever be 100 percent perfect. Hence, CPM users must be capable of properly interpreting the outcome of CPM analyses (Dimaiuta 2006).

In the field of transportation planning several methods have been used over time in an attempt to predict crash rates. Examples of this type of usage includes an analysis of historical data of road segments with similar characteristics, before-and-after studies, regression analyses of crash rates, and so on. Just like any other prediction methods, crash prediction models have its strengths and weaknesses. The CPM is based on the well-known approaches of the past, and they inevitably inherited the strengths and weaknesses of these methods. Kinney (2005) said, “One of the author’s professors used to say, ‘all models are wrong, some are useful.’ IHSDM appears to satisfy both parts of this statement.”

Crash prediction models used in CPM are based on a negative binomial regression analysis that ensures sensitivity to site-specific geometric design and traffic control features. The CPM is more useful in identifying high crash locations than estimating specific crash frequency or rates. The ability of the CPM in predicting crash occurrences increases if both historic crash data of either a similar site or the target road itself and correct geometric design data of the highway section under study are available as long as geometric conditions remain the same in the future (Dimaiuta 2006).

One major complaint that the IHSDM support center has received is the large amount of input data required by the CPM module to produce reliable estimates. Another complaint by many engineers is that IHSDM only uses a simplified module of roadside information, which they consider inefficient in representing realistic roadside conditions. Also, the interaction among roadway geometric design features is neglected. This issue was pointed out by the expert panel that developed AMFs but the problem has not been resolved (Dimaiuta 2006).

The bottom line is that engineers need to be aware that CPM outputs should be used as a reference instead of being used as absolute values. Kinney (2005) stated, “It is

important that we recognize that IHSDM is a decision tool which is not meant to be a substitute for engineering judgment.”

2.1.3 Design Consistency Module (DCM)

The Design Consistency Module (DCM) provides the evaluation of potential speed inconsistencies. The module uses a speed-profile model to perform the task and estimates 85th percentile, free-flow, and passenger vehicle speeds at different points along a roadway. The speed-profile model checks estimated 85th percentile speeds on curves (horizontal, vertical, and horizontal-vertical combinations), desired speeds on long tangents, acceleration and deceleration rates for entering and exiting curves, and an algorithm for estimating speeds on vertical grades (FHWA 2006).

The major strength of DCM is that it provides quantitative measures for evaluating the consistency of traveling speed along a highway and takes into account the effect of both horizontal and vertical alignments on operating speed. However, because the equations used in the module were derived from the data collected in a few selected states – Texas, Washington, Oregon, Michigan, New York, and Pennsylvania – the applicability of the equations to highways in the other states is still under scrutiny. Another concern about the DCM is that it is only applicable to highways with relatively higher speeds. For highways with speed limit less than 50 mph the module may not be appropriate (Dimaiuta 2006).

2.1.4 Traffic Analysis Module (TAM)

The Traffic Analysis Module (TAM) contains TWOPAS – a microscopic traffic simulation model for two-lane rural highways. TWOPAS has the capability to simulate any combinations of passing and climbing lanes, no passing zones, sight restrictions, curves, and grades and takes into account the effects of road geometry, driver characteristics and their driving preferences, vehicle size and performance characteristics, and the presence of oncoming and same-direction vehicles that are in sight at any given time (FHWA 2006).

However, the TAM takes no considerations for turning lanes, intersections, shoulders, or any other forms of interruption to two-lane highway operation. Thus, for the TAM to work on a two-lane highway that contains interludes, the highway needs to be split into segments that do not have any interruptions within them (FHWA 2006).

2.1.5 Intersection Review Module (IRM)

The IRM performs a diagnostic review to systematically evaluate an intersection design for typical safety concerns. The module evaluates intersections from four perspectives: intersection configuration, horizontal alignment, vertical alignment, and intersection sight distance (FHWA 2006).

The IRM provides a comprehensive review of an intersection design to diagnose geometric factors, identify potential concerns about safety and possible solutions for these concerns, and consider the overall outcome of all geometric design elements (FHWA 2006).

Because of its unique nature, the IRM stands independent from all other modules. The IRM requires a different set of data, file, and evaluation settings.

2.1.6 Driver/Vehicle Module (DVM)

The DVM evaluates how a driver would react and respond to the roadway design while operating a vehicle and also identifies if the roadway condition may increase the potential for the driver to lose control. This module consists of two models: the driver performance model (DPM) and the vehicle dynamics model (VDM). The DPM estimates elements such as perception, speed decision, path decision, attention, speed control, path control, and other elements that affect driver's performance while the VDM estimates elements such as lateral acceleration, friction demand, and rolling moments (FHWA 2006)..

The DPM was not available at the time of this thesis. According to the program developer, the DPM can closely mimic the effects of curve radius and curve deflection on driver's speed choice, but how "close" the model can mimic the driver's decision making will remain to be seen until the model is released and tested with real-life situations. For

instance, different types of drivers still need to be represented, but the current module does not consider such diversity, and the assumption that a given driver negotiates all curves is not realistic (FHWA 2006).

2.2 Literature Research

As mentioned at the beginning of this chapter, IHSDM has been on the market only for a relatively short period of time; hence, the amount of literature on IHSDM's applications is yet small. Most of the literature available are reviews of the reliability of the mathematical equations used in the models, the model logic, or the consistency of the modules of IHSDM (Levison et al. 2002, Louisell et al. 2006, Oh et al. 2003). There is a lack of literature that discusses the application aspect of IHSDM. Only a small number of reports were available for the study. For example, Kinney gave descriptions of his encounter with IHSDM on a 3R (Resurfacing, Restoration, and Rehabilitation) project in Anchorage, Alaska (Kinney 2005). He used IHSDM to evaluate the comparison made between the traditional 3R methods and 3R alternative methods. Kinney (2005) stated that "IHSDM is a good tool for evaluating two-lane [rural highway] alternatives. It is relatively easy to use and comes with a complete set of manuals to assist the user in preparing models. The IHSDM model is applicable to new and 3R analysis...the Policy Review Module and the Design Consistency Module are excellent tools in evaluating new designs or multiple alternatives."

Figure 2-2 is a summary of the functions of the six modules of IHSDM.

2.3 Chapter Summary

In Chapter 2 a brief summary of the six modules of IHSDM and findings from the literature search were presented. Due to its short period of existence in the highway design related software market there is a lack of literature concerning the practical application of IHSDM. Of the six modules (PRM, CPM, DCM, TAF, IRM, and DVM) the scope of the study included only CPM and IRM because the objective of the study is to evaluate the applicability of IHSDM to safety audits of two-lane rural highways.

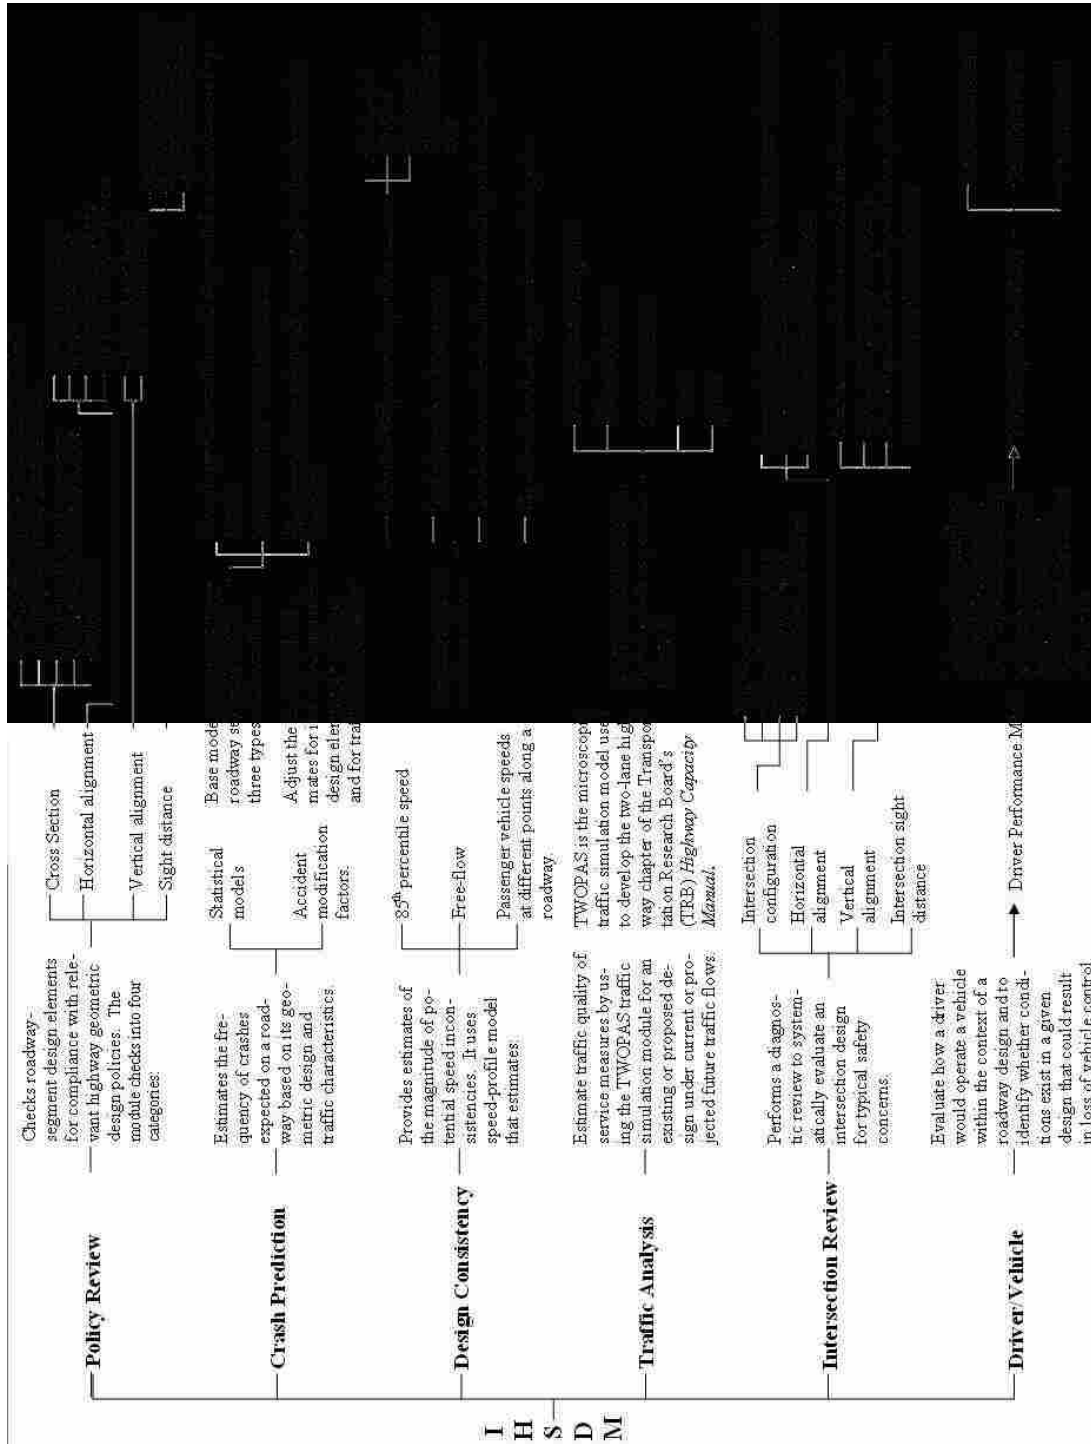


Figure 2-2: Summary Chart of IHSDM's Six Modules

3 Analysis Procedure

The study used the IHSDM 2006 version, which was the latest version available at the time the study began. The study focused on the evaluation of two modules of IHSDM: CPM and IRM. These two modules require horizontal and vertical alignments of the highway section under study. However, many two-lane rural highways in Utah were built more than 20 years ago and the original design and construction plans were unavailable. Furthermore, these two-lane rural highways have undergone repairs and reconstruction whose geometric design data were not available either. Therefore, in order to meet the data requirements of CPM and IRM, a new approach was used to obtain alignment data. This chapter discusses the procedure used to prepare necessary data for using the IHSDM.

Figure 3-1 displays the flowchart that outlines the analysis steps followed in this study. Highway sections were first chosen, and then the GPS data for each section were collected. The next step was to convert the GPS data into the format that were accepted by highway geometric design software. Then, surrogate centerline alignments for each study section were created. These alignment data were then entered into IHSDM. This chapter describes how these steps were carried out.

The analysis procedure presented in this report can be adopted for similar studies where crash prone segments within highway sections need to be identified and crash predictions are required for comparing improvement alternatives. Also, the method to produce surrogate horizontal and vertical alignments for two-way rural highways using GPS data will be useful for highway and safety engineers who desire to analyze the safety level of such highways but have not been able to do so because of the lack of design plans and/or as-built plans to extract horizontal and vertical alignments.

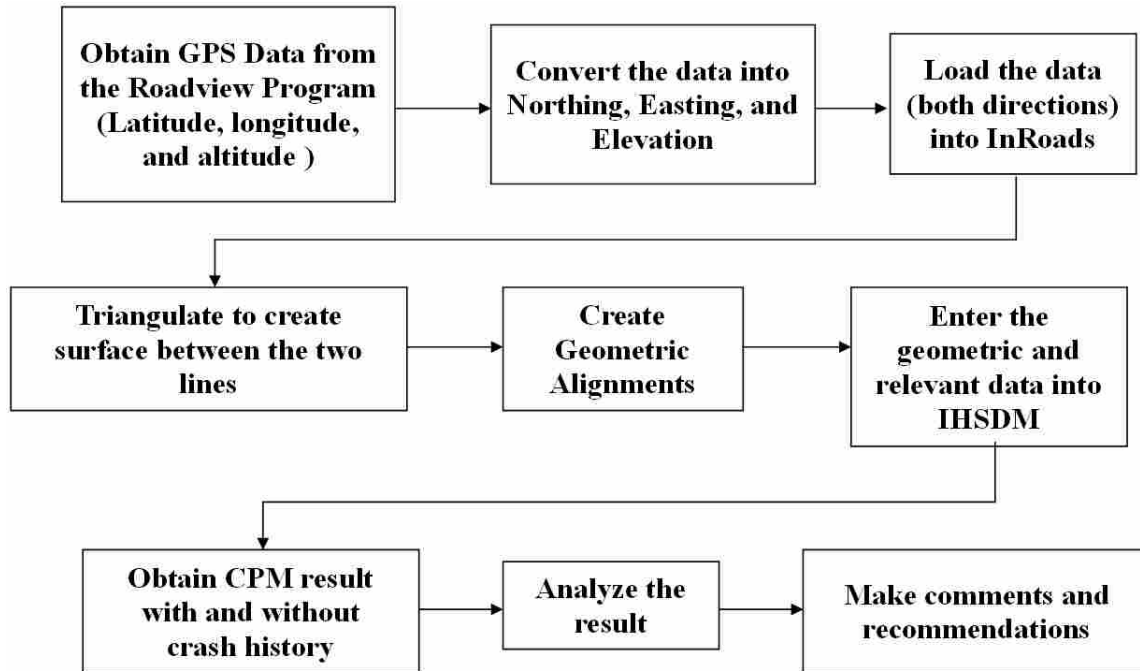


Figure 3-1: Flowchart of Analysis Steps

3.1 Data Collection

As mentioned in the introduction section of this chapter, IHSDM requires horizontal and vertical alignment data of the centerline of the highway section under study. Without these data no module of IHSDM runs. In order to compensate the lack of design plans and documents that might show alignment data a new approach for producing centerline alignments was needed. The research team found that UDOT had a photolog program for its highways and the images of the highways and GPS data of the data collection vehicle were available to public over the Internet, through the Roadview Explorer website (UDOT 2007a). The data provided by this website included milepost, latitude, longitude, altitude, and photo logs. Currently over half of the 50 states in the United States have adopted the method and constructed their own local route database (Mandli 2007).

Figure 3-2 shows an illustration of a photologging vehicle. The digital camera attached to the front windshield area of the vehicle has a resolution of 1600 pixels by 1200 pixels. It is positioned at the driver’s eye height. From this position majority of travel lanes, street signs, guide signs, mile markers, pavement markings, and overhead

signs can be captured by the camera. The camera has the capacity to take from 100 up to 500 images per mile. A similar method was used for UDOT's photolog program.

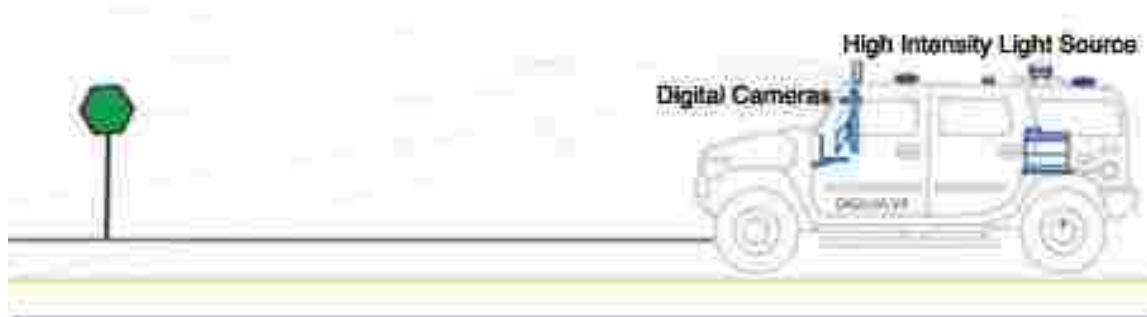


Figure 3-2: Illustration of a Data-Collecting Vehicle (Mandli 2007)

3.2 Obtaining Geometric Data

In this study, the GPS data of a selected highway section were used to create a surrogate centerline alignment for the selected highway section instead of its original road plans, which were basically non-existent. After the GPS data (longitude, latitude, and altitude) were obtained from the photolog program of UDOT, they were converted into coordinate data (northing, easting, and elevation) using the Watershed Modeling System (WMS) developed by Brigham Young University (BYU), and the converted coordinate data were then imported into InRoads to develop a surrogate centerline alignment. This particular procedure to obtain surrogate alignment data of two-lane rural highways was developed for this research and the procedure is discussed in detail in Appendix. (Note: This particular procedure was initially developed by Mike Mosley at BYU. The author of this thesis modified the procedure as needed.)

3.3 Other Required Data for CPM

To run CPM several other types of data are required, including speed limit, Annual Average Daily Traffic (AADT), lane width, driveway density, cross slope, superelevation, crash history, etc. For some of these data, CPM uses default values if the user does not provide alternative values. In this particular study, the selected highways sections had their crash history available from 1992 to 2005 (UDOT 2006). However,

considering that the road condition might have changed over such a long period of time, only the crash history from 2003 to 2005 was used. Also the AADT of corresponding years were obtained from UDOT (UDOT 2006). Likewise, for CPM, it would be unrealistic to expect a high accuracy in the output if the prediction period is too long. Hence, the prediction period was set to the same length of time, that is three years from 2006 to 2008.

3.4 Entering Data into IHSDM

After all the required data are obtained, the next step is to enter or import these data into IHSDM. Among the types of required data that the user enters into IHSDM, entering alignment data is the one that would take the longest time if entered manually. To solve this problem, IHSDM provides several spreadsheets that were designed specifically to transform the raw alignment data into the format that is accepted by IHSDM. The spreadsheets can be accessed by selecting “Tools > Data Entry Assistant” in the main menu of IHSDM. Figure 3-3 shows how to locate the spreadsheets and Figure 3-4 shows the pop-up window after Data Entry Assistant is selected.

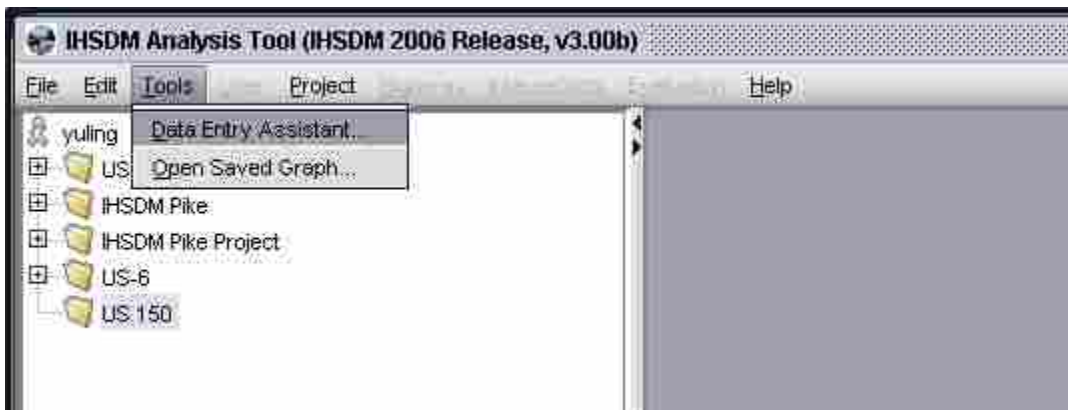


Figure 3-3: Screen Shot Showing the Location of the Geometric Alignment Assistant Spreadsheets

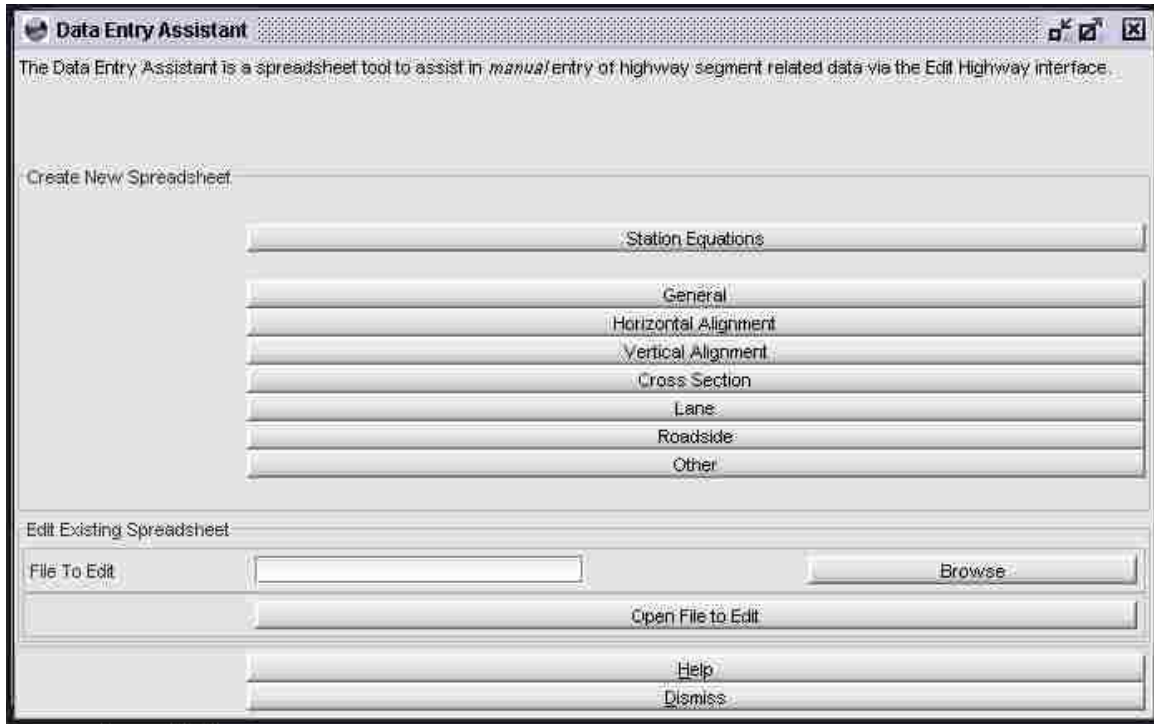


Figure 3-4: Data Entry Assistant Pop-Up Window

With the Data Entry Assistant the process of entering alignment data is greatly simplified. As to the rest of the data entry, the user only needs to use the Highway Editor, which is quite self-explanatory. A screenshot of the Highway Editor is shown in Figure 3-5. In the Highway Editor the user can switch between the different types of data by selecting appropriate tabs. The figure shows the window that contains several different tabs, labeled as General, Horizontal, Vertical, Cross Section, Lane, etc. Each tab gives the user data entry fields that are either required or optional. As mentioned previously, each module varies in its data requirements, and an easy way to tell which module uses certain types of data is to look at the lower left corner of the data entry area, where a statement in bold font states which modules use the particular data the user is entering. For example, in Figure 3-5 the text says “This element is used by PRM, CPM and IRM.” This indicates that the daily traffic volume is used by the Policy Review Module, Crash Prediction Module, and Intersection Review Module. If there is any question about data entry, the Help button on the lower right has brief yet adequate explanations for the particular type of data shown on the current page.

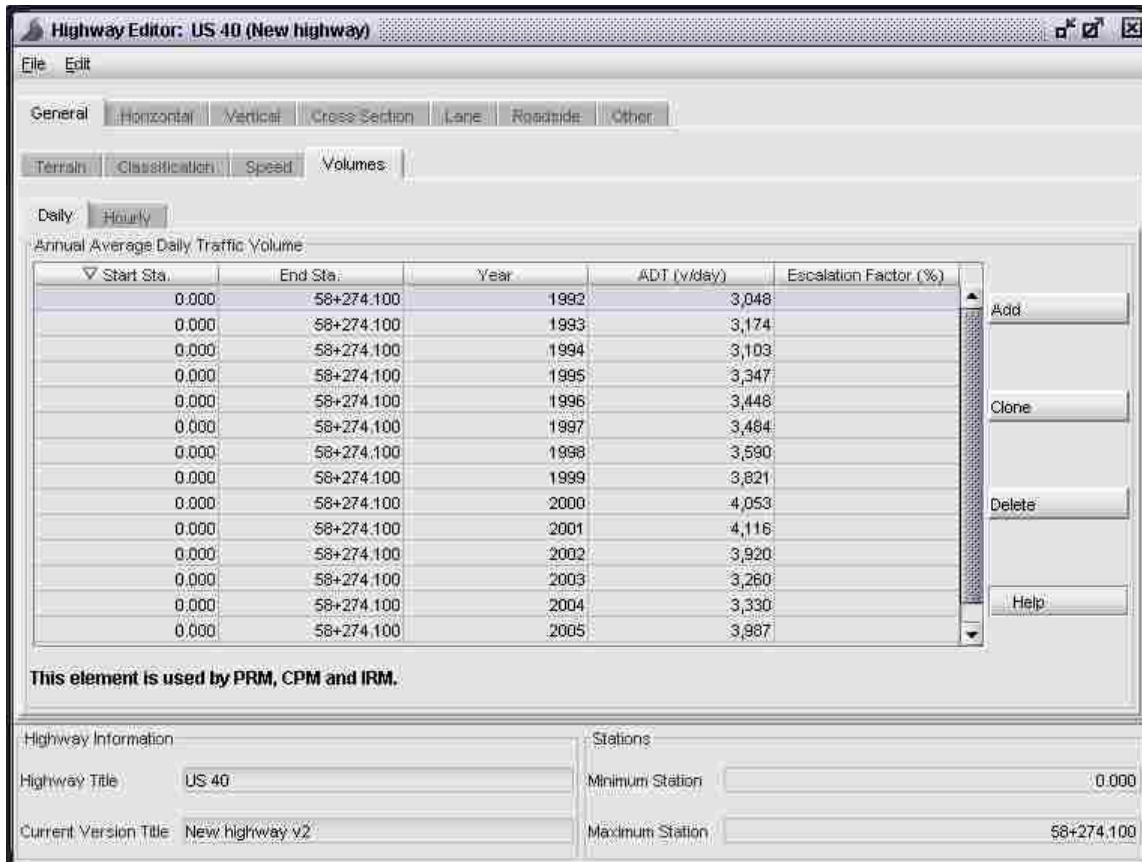


Figure 3-5: Screenshot of the Highway Editor of IHSDM

3.5 Chapter Summary

This chapter presented the procedure for preparing data to run the CPM and IRM module of IHSDM. To compensate the lack of the alignment data for two-lane rural highway a method that takes advantage of the already available UDOT's GPS data of two-lane rural highways was developed. GPS data were converted to the data format that could be read by InRoads and surrogate alignment data necessary for the two modules were created using the alignment creation features of InRoads. The surrogate alignments and other data were then entered into IHSDM to run the CPM or IRM modules.

4 Application of CPM to Selected Highway Sections

Three sections of two-lane rural highways in Utah were selected for analysis. To make the selections, the traffic and safety engineers of UDOT's four regions, who were members of the TAC of the study, were asked to provide their preference on specific highway sections that have experienced a high number of crashes. From their lists of potential study sites three sections shown in Table 4-1 were selected. There was no appropriate study section available in Region 1.

Table 4-1: Three Highway Sections Selected for Analysis

Highway	Milepost	Region
US-40	From MP35 to MP45	3
US-6	From MP22 to MP28	4
SR-150	From MP0.6 to MP16.4	2

The three study sections selected for analysis were all two-lane rural highways, which were the target study type of roads for IHSDM. Also, they were all of reasonable length, and most importantly, the three study sections were listed as one of the most crash prone highway sections on their lists.

In using the prediction models of the CPM, no adjustment was made for the calibration factor which can be used to adjust the model to the local conditions for two reasons: 1) it was desired to test if the CPM could be used as is, and 2) the calibration task was, therefore, outside the scope of this study. It is advantageous if the calibration task could be eliminated.

Figure 4-1 shows the general locations of the three selected highway sections on a Utah highway map (UDOT 2008). As shown in the figure the three study sections are located on the northern and middle part of the state.

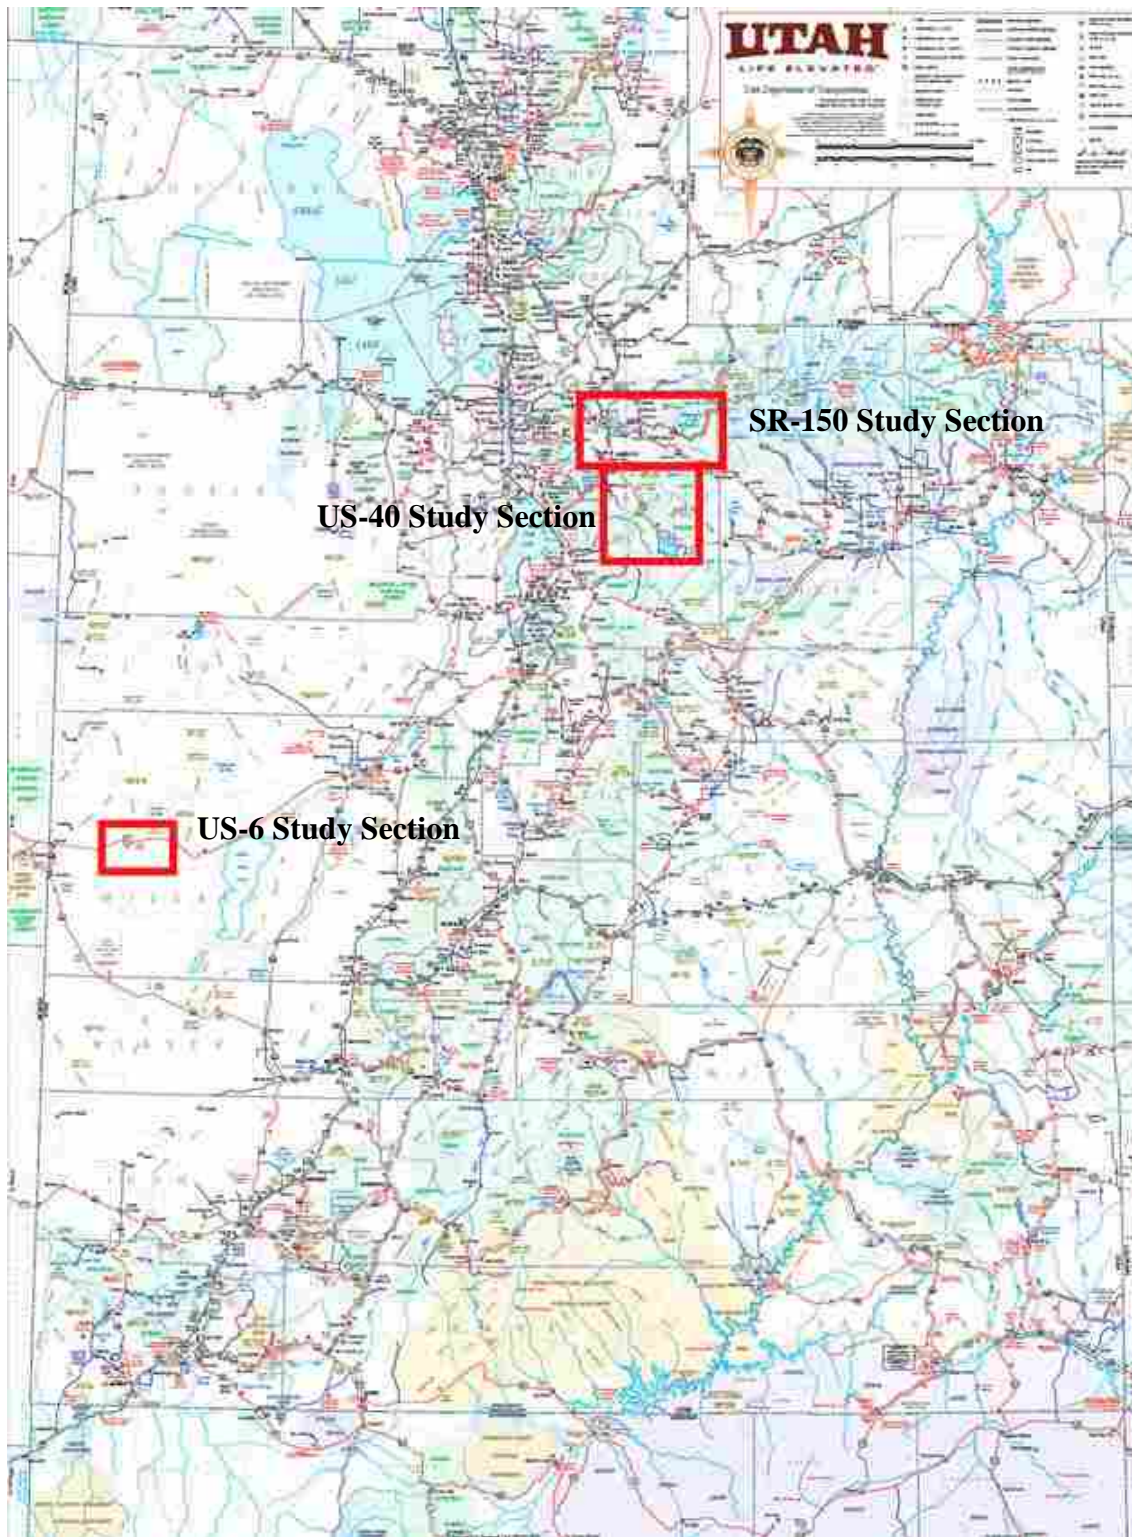


Figure 4-1: Locations of the Three Selected Two-Lane Rural Highway Sections (UDOT 2008)

4.1 US-40 Study Section

Located in UDOT Region 3, the US-40 Study Section, from MP 35 to MP 45, was selected for its undesirable crash history. This particular section became an ideal section for the study for its length and its proximity to BYU, where the author studied.

4.1.1 Current Conditions of the US-40 Study Section

A field visit was made to the study section. The general conditions of the study section were found to be good. The pavement was in acceptable condition, the lane markings were clearly visible, and the traffic signs appeared to be properly installed and properly functioning.

Figure 4-2 and Figure 4-3 are the photos taken of the US-40 study section during two different seasons. They are shown to help the readers understand the general setting of this study section. Figure 4-4 shows the location of the US-40 study section from MP 35 to MP 45. The surrogate centerline horizontal alignment of the study section shown in Figure 4-5 was created by InRoads using the GPS data supplied by UDOT's photolog specialists. As shown in Figure 4-4 and Figure 4-5, the surrogate centerline alignment appears practically identical to the highway section shown in Figure 4-4.



Figure 4-2: Photos of the US-40 Study Section in Summer 2005 (UDOT 2007a)



Figure 4-3: Photos of the US-40 Study Section in Winter 2006 (UDOT 2008) (Taken by Kaitlin Chuo)

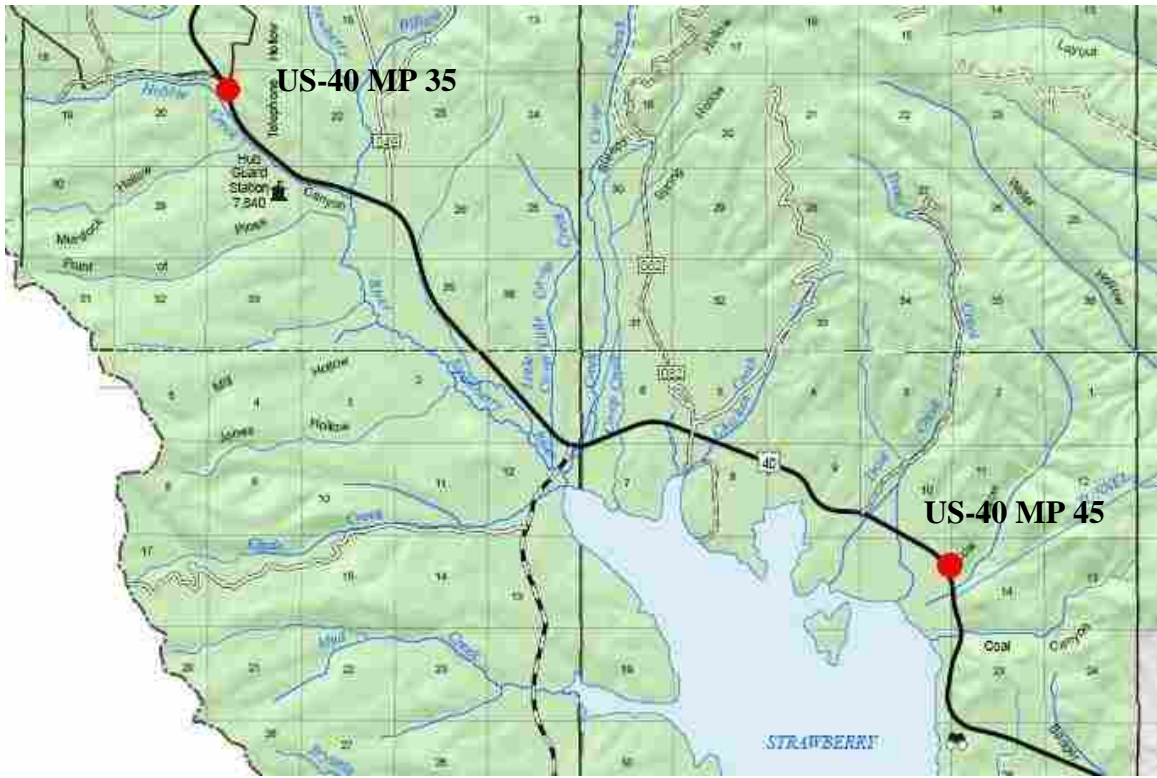


Figure 4-4: Location of the US-40 Study Section (UDOT 2008)

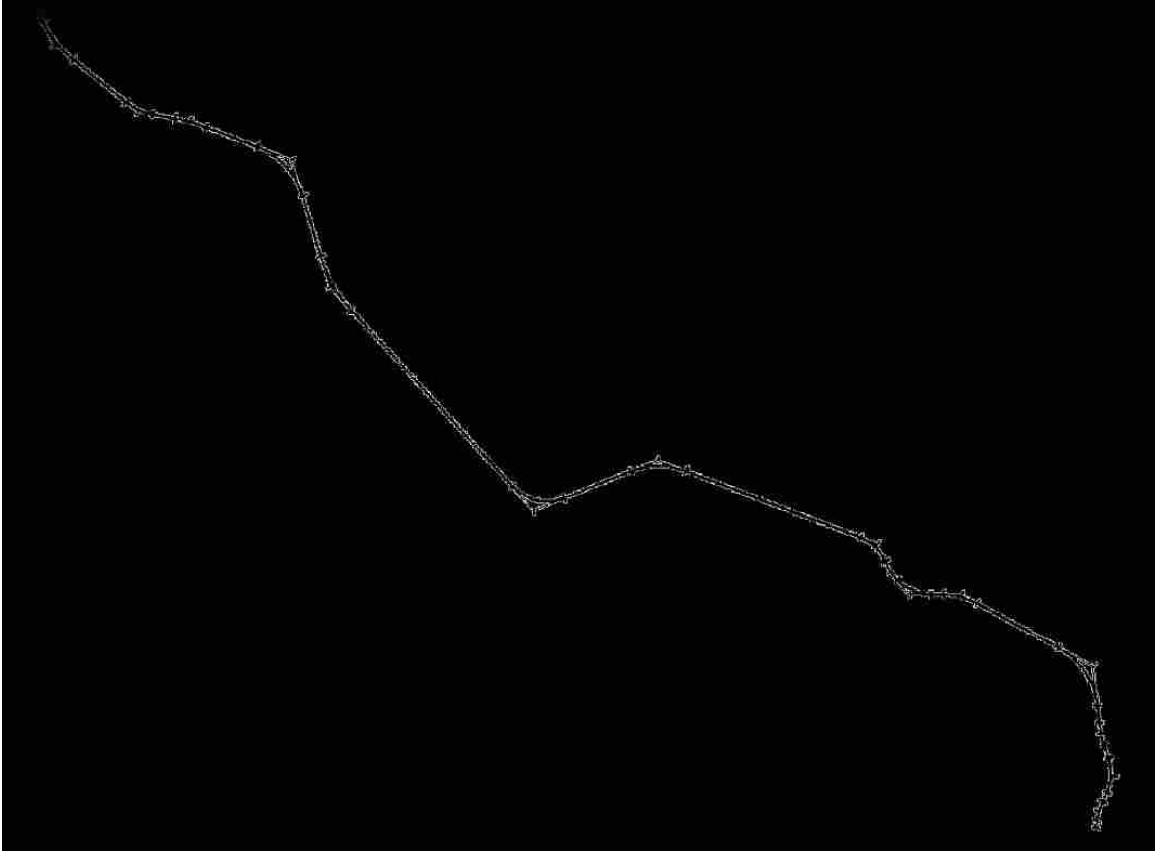


Figure 4-5: Surrogate Horizontal Alignment of the US-40 Study Section with Mileposts

4.1.2 Centerline Alignments of the US-40 Study section

As mentioned previously, GPS data (longitude, latitude, and altitude) were obtained from UDOT's photolog specialists and converted into appropriate data (northing, easting, and elevation) to import into InRoads. The centerline horizontal and vertical alignments were then manually created in InRoads (see Appendix for the details of creating surrogate alignments). When creating surrogate alignments, it is important to keep them closely follow the geometry, yet also stay at reasonable details instead of excessively trying to match all the details, which may waste time.

The resulting horizontal and vertical alignments are presented in Table 4-2 and Table 4-3.

Table 4-2: The Horizontal Alignment of the US-40 Study Section (MP 35 to MP 45)

Segment	Milepost		Radius
	From	To	
Tangent	35.00	35.06	---
Simple Curve	35.06	35.43	4500
Tangent	35.43	35.91	---
Simple Curve	35.91	36.13	2300
Tangent	36.13	36.30	---
Simple Curve	36.30	36.53	7000
Tangent	36.53	36.94	---
Simple Curve	36.94	37.44	2900
Tangent	37.44	37.91	---
Simple Curve	37.91	38.37	5500
Tangent	38.37	40.12	---
Simple Curve	40.12	40.54	1800
Tangent	40.54	41.06	---
Simple Curve	41.06	41.47	2900
Tangent	41.47	42.84	---
Simple Curve	42.84	43.09	1700
Tangent	43.09	43.11	---
Simple Curve	43.11	43.26	2500
Tangent	43.26	43.27	---
Simple Curve	43.27	43.54	1800
Tangent	43.54	43.64	---
Simple Curve	43.64	43.89	2775
Tangent	43.89	44.57	---
Simple Curve	44.57	45.10	2950
Tangent	45.10	45.23	---
Simple Curve	45.23	45.39	4500
Tangent	45.39	45.50	---
Simple Curve	45.50	45.50	5000
Tangent	45.50	45.50	---
Simple Curve	45.50	45.76	1930
Tangent	45.76	45.84	---
Simple Curve	45.84	45.99	3500
Tangent	45.99	46.04	---

Table 4-3: Vertical Alignment of the US-40 Study Section (MP 35 to MP 45)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
35.21	-4.08	600	-1.20	600
35.89	-1.20	250	-1.45	250
36.17	-1.45	500	-0.95	500
36.61	-0.95	500	0.15	500
37.19	0.15	500	-1.57	500
38.02	-1.57	1250	-0.55	1250
39.29	-0.55	500	-0.70	500
39.99	-0.70	1500	0.51	1500
41.11	0.51	500	-0.72	500
41.41	-0.72	500	0.69	500
41.98	0.69	1625	-0.61	1625
42.90	-0.61	800	3.48	800
43.41	3.48	875	-2.64	875
43.75	-2.64	600	-0.28	600
44.13	-0.28	750	-1.78	750
44.62	-1.78	600	0.35	600
45.51	0.35	500	-0.35	500

4.1.3 Crash Prediction Results of the US-40 Study Section

The purpose of this study was to evaluate the capability of CPM for identifying “hot spots” in a safety audit where crash rates would be higher than other parts of the section. In order to evaluate the sensitivity of CPM results two alternative tests were made: one evaluated with crash history and the other without crash history. The comparison of their results can be made to check if CPM is capable of making appropriate crash predictions independently without crash history. This capability becomes important when the effectiveness of multiple improvement alternatives is tested in terms of crash reduction. In comparing multiple improvement alternatives crash histories of such alternatives are not available. Hence, being able to produce crash predictions along the highway section without crash history is important. To ensure the accuracy and reliability of the prediction results, only the crash data from 2003 to 2005 were used and the three year prediction was made. Table 4-4 presents the prediction results in number of crashes for the US-40 study section from MP 35 to MP 45.

Figure 4-6, Figure 4-7, and Figure 4-8 are graphical presentations of the crash prediction results shown in Table 4-4, prepared to help the readers visually compare the difference in the number of crashes along the centerline alignments of the study section, while Figure 4-9 shows the differences between the CPM results analyzed with and without crash history.

Table 4-4: Crash Prediction Results for the US-40 Study section (Number of Crashes)

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
35.00	35.06	0.55	0.182	0.37	1.00
35.06	35.43	2.65	1.26	1.39	4.00
35.43	35.91	2.18	1.40	0.77	3.00
35.91	36.13	0.97	0.83	0.15	1.00
36.13	36.30	0.73	0.48	0.25	1.00
36.30	36.53	1.36	0.74	0.62	2.00
36.53	36.94	1.15	1.15	0.00	1.00
36.94	37.44	3.43	1.74	1.68	5.00
37.44	37.91	1.72	1.36	0.36	2.00
37.91	38.37	1.81	1.48	0.33	2.00
38.37	40.12	6.56	4.98	1.58	8.00
40.12	40.54	2.89	1.55	1.34	4.00
40.54	41.06	1.36	1.48	0.12	1.00
41.06	41.47	2.29	1.44	0.85	3.00
41.47	42.84	5.03	3.90	1.13	6.00
42.84	43.09	1.62	1.02	0.60	2.00
43.09	43.11	0.06	0.06	0.02	0.00
43.11	43.26	0.34	0.62	0.28	0.00
43.26	43.27	0.01	0.02	0.01	0.00
43.27	43.54	1.65	1.10	0.55	2.00
43.54	43.64	0.17	0.27	0.10	0.00
43.64	43.89	2.00	0.93	1.07	3.00
43.89	44.57	1.66	1.94	0.29	1.00
44.57	45.10	2.51	1.84	0.68	3.00
45.10	45.23	0.23	0.37	0.14	0.00
35.00	35.06	0.55	0.182	0.37	1.00

Table 4-4: Crash Prediction Results for the US-40 Study section (Number of Crashes) (continued)

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
35.06	35.43	2.65	1.26	1.39	4.00
35.43	35.91	2.18	1.40	0.77	3.00
35.91	36.13	0.97	0.83	0.15	1.00
36.13	36.30	0.73	0.48	0.25	1.00
36.30	36.53	1.36	0.74	0.62	2.00
36.53	36.94	1.15	1.15	0.00	1.00
36.94	37.44	3.43	1.74	1.68	5.00
37.44	37.91	1.72	1.36	0.36	2.00
37.91	38.37	1.81	1.48	0.33	2.00
38.37	40.12	6.56	4.98	1.58	8.00
40.12	40.54	2.89	1.55	1.34	4.00
40.54	41.06	1.36	1.48	0.12	1.00
41.06	41.47	2.29	1.44	0.85	3.00
41.47	42.84	5.03	3.90	1.13	6.00
42.84	43.09	1.62	1.02	0.60	2.00
43.09	43.11	0.06	0.06	0.02	0.00
43.11	43.26	0.34	0.62	0.28	0.00
43.26	43.27	0.01	0.02	0.01	0.00
43.27	43.54	1.65	1.10	0.55	2.00
43.54	43.64	0.17	0.27	0.10	0.00
43.64	43.89	2.00	0.93	1.07	3.00
43.89	44.57	1.66	1.94	0.29	1.00
44.57	45.10	2.51	1.84	0.68	3.00
45.10	45.23	0.23	0.37	0.14	0.00
45.23	45.39	0.32	0.54	0.22	0.00
45.39	45.50	0.19	0.30	0.11	0.00
45.50	45.50	0.01	0.02	0.01	0.00
45.50	45.50	0.00	0.00	0.00	0.00
45.50	45.76	0.56	0.10	0.44	0.00
45.76	45.84	0.13	0.21	0.08	0.00
45.84	45.99	0.31	0.54	0.23	0.00
45.99	46.04	0.09	0.14	0.05	0.00

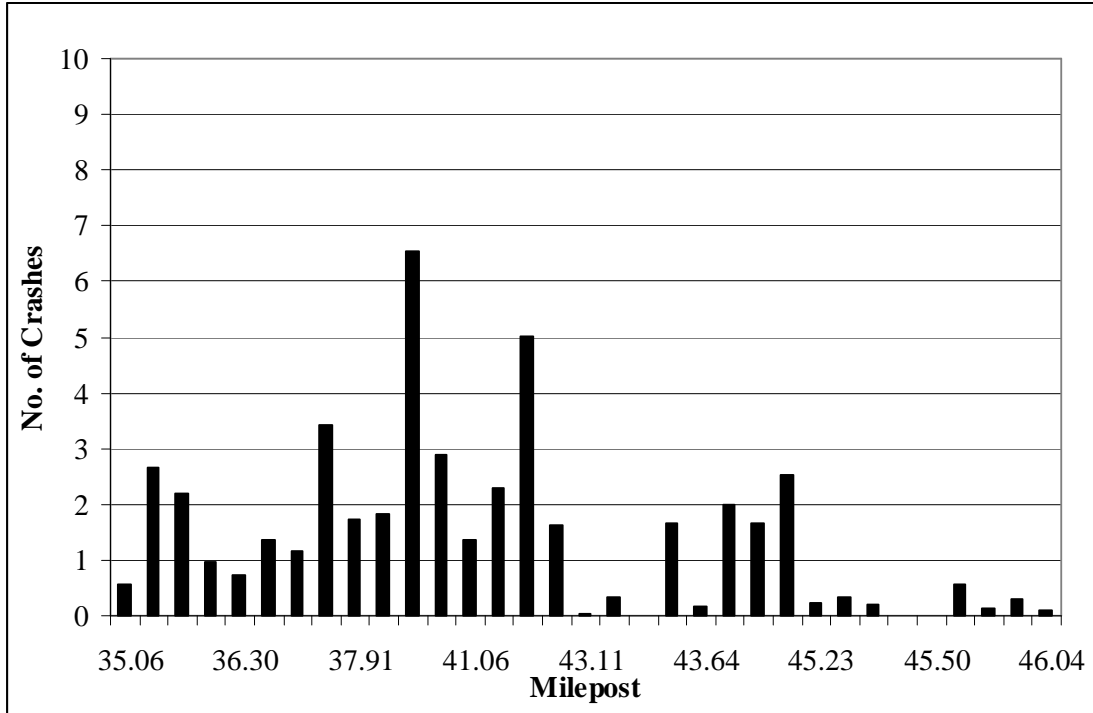


Figure 4-6: Plot of CPM Prediction Results of the US-40 Study Section (Number of Crashes), MP 35-MP 45 (2006-2008), Analyzed with Crash History

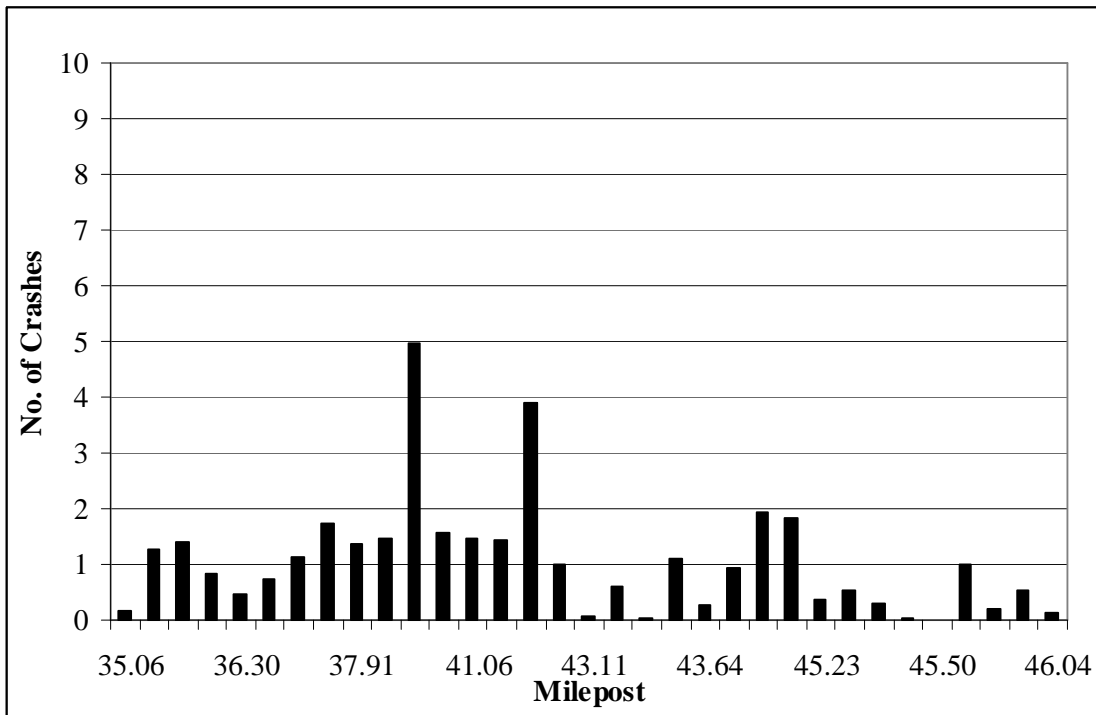


Figure 4-7: Plot of CPM Prediction Results of US-40 Study Section (Number of Crashes), MP 35-MP 45 (2006-2008), Analyzed without Crash History

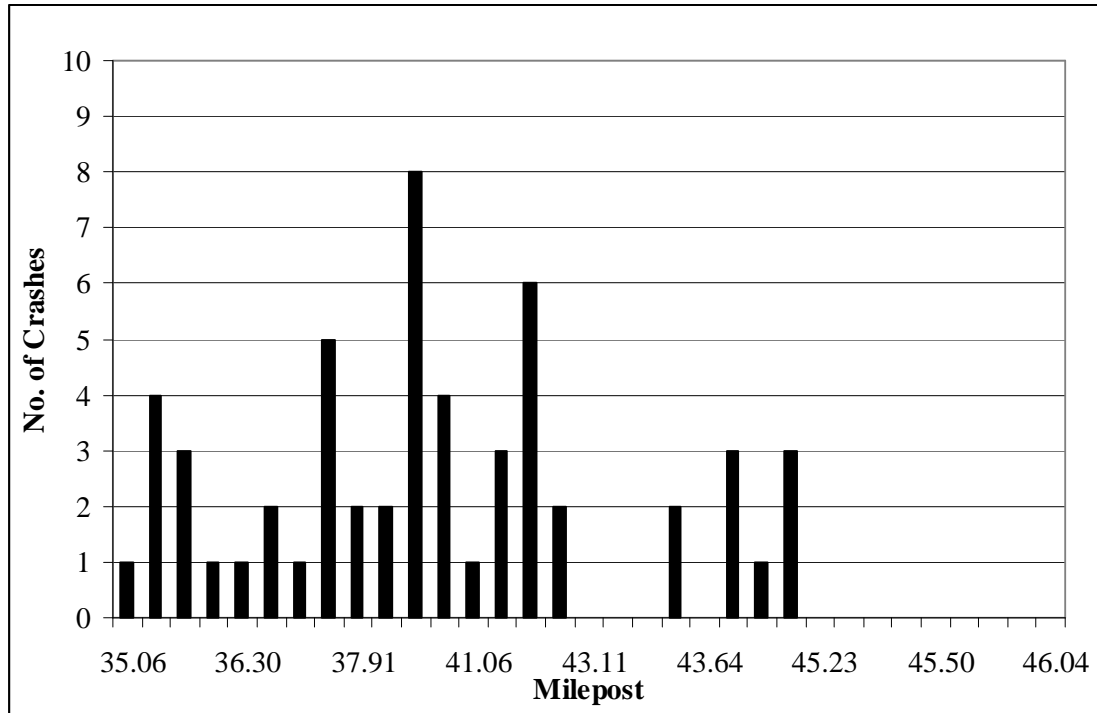


Figure 4-8: Plot of Crash History of US-40 Study Section (Number of Crashes), MP 35-MP 45 (2003-2005)

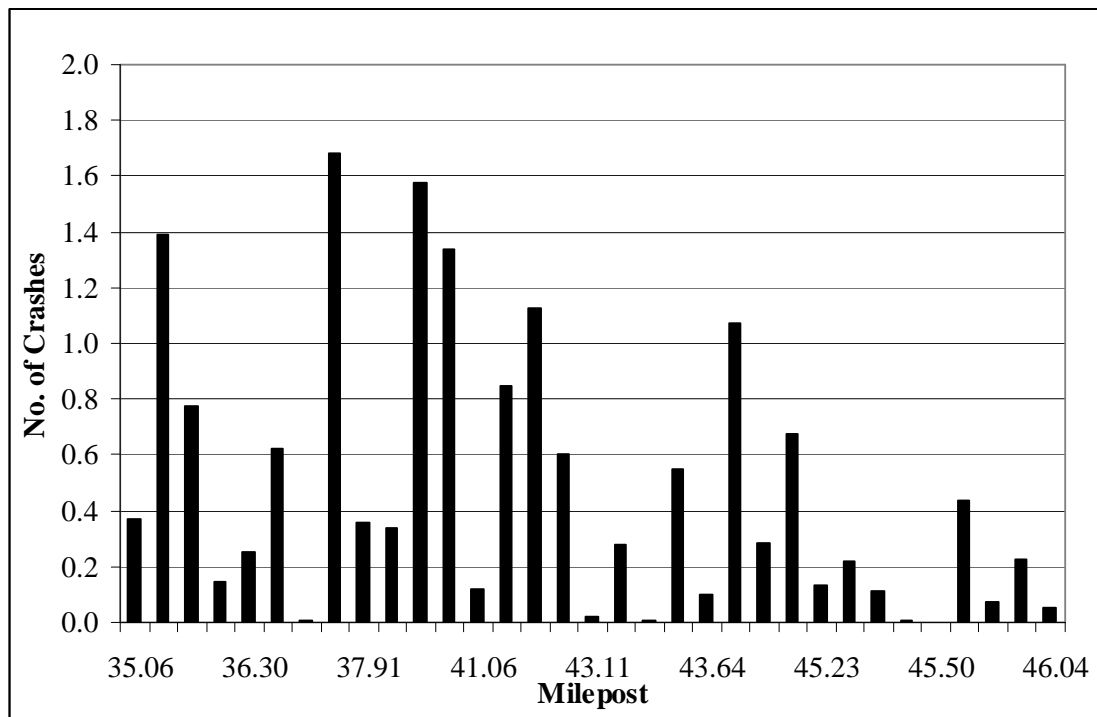


Figure 4-9: Plot of the Difference Between the CPM Results of US-40 Study Section in Number of Crashes Analyzed With and Without Crash History

Figure 4-6 and Figure 4-7 show that the two prediction results from CPM have trends similar to Figure 4-8, the actual crash history. All three plots show high peaks around MP 35.7, MP 37.1, MP 42.6, and MP 44.4, with the highest peak at MP 40.3. There is one thing worth noticing: Figure 4-7, which shows the crash prediction results without crash history exhibits a trend similar to the ones in Figure 4-6 and Figure 4-7. Figure 4-9 was created to show the difference in number of crashes between the CPM results with and without crash history. Table 4-5 shows a summary of statistics of the differences shown in Figure 4-9. It shows that the mean difference in the number of crashes between the two methods is less than 0.5, and the standard error of the mean is very small (0.085), resulting in the confidence interval of 0.312 and 0.646 at the 95 percent confidence level. From the statistics presented in Table 4-5 it can be said that the crash prediction without crash history is able to produce crash predictions that are similar to the crash prediction with crash history.

Table 4-5: Statistical Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of US-40 Study Section

Mean	0.479
Standard Error	0.085
Median	0.285
Standard Deviation	0.490
Sample Variance	0.240
Kurtosis	0.304
Skewness	1.151
Range	1.683
Minimum	0.002
Maximum	1.684
Confidence Interval of the Mean (at the 95% Confidence Level)	0.312 – 0.646

Now that the similarity between the CPM results with and without crash history in number of crashes was found, crash rates per MVMT were compared for the with and without crash history cases. From equation 2--2 it is evident that the computation of number of crashes considers the exposure aspect of crashes. Hence, looking at the crashes

per MVMT is basically removing this exposure effect. Segments in the study section are defined as elements of horizontal alignment such as tangent or curve segment of the horizontal alignment. The computed crash rates are presented in Table 4-6 and Figure 4-10, Figure 4-11, and Figure 4-12 were prepared to visualize the trends in the prediction results. And the differences between the two CPM results were shown in Table 4-6 and plotted in Figure 4-13.

Table 4-6: Crash Prediction Results for the US-40 Study Section (Crashes/MVMT)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
35.00	35.06	0.06	2.06	0.68	1.38	3.99
35.06	35.43	0.37	1.61	0.77	0.84	2.61
35.43	35.91	0.48	1.01	0.65	0.36	1.50
35.91	36.13	0.22	1.02	0.86	0.16	1.12
36.13	36.30	0.17	0.98	0.65	0.33	1.44
36.30	36.53	0.23	1.31	0.71	0.60	0.00
36.53	36.94	0.41	0.64	0.64	0.00	0.59
36.94	37.44	0.50	1.53	0.78	0.75	2.40
37.44	37.91	0.47	0.82	0.65	0.17	1.03
37.91	38.37	0.47	0.88	0.71	0.17	1.04
38.37	40.12	1.75	0.84	0.64	0.20	1.10
40.12	40.54	0.42	1.56	0.84	0.72	2.32
40.54	41.06	0.52	0.59	0.64	0.05	0.46
41.06	41.47	0.41	1.25	0.78	0.47	1.75
41.47	42.84	1.37	0.83	0.64	0.19	1.05
42.84	43.09	0.25	1.46	0.92	0.54	1.94
43.09	43.11	0.02	0.42	0.67	0.25	0.00
43.11	43.26	0.15	0.50	0.91	0.41	0.00
43.26	43.27	0.01	0.42	0.67	0.25	0.00
43.27	43.54	0.27	1.36	0.91	0.45	1.76
43.54	43.64	0.09	0.41	0.66	0.25	0.00
43.64	43.89	0.25	1.76	0.82	0.94	2.83

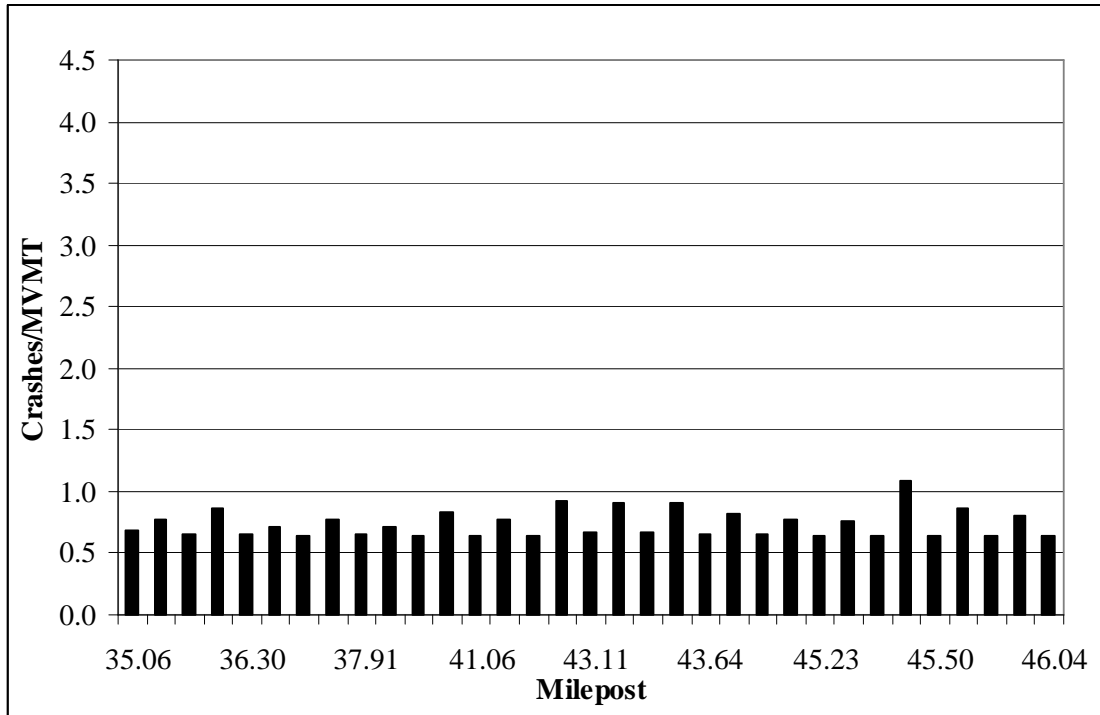


Figure 4-11: Plot of CPM Prediction Results of the US-40 Study Section (Crashes/MVMT), MP 35-MP 45 (2006-2008), Analyzed without Crash History

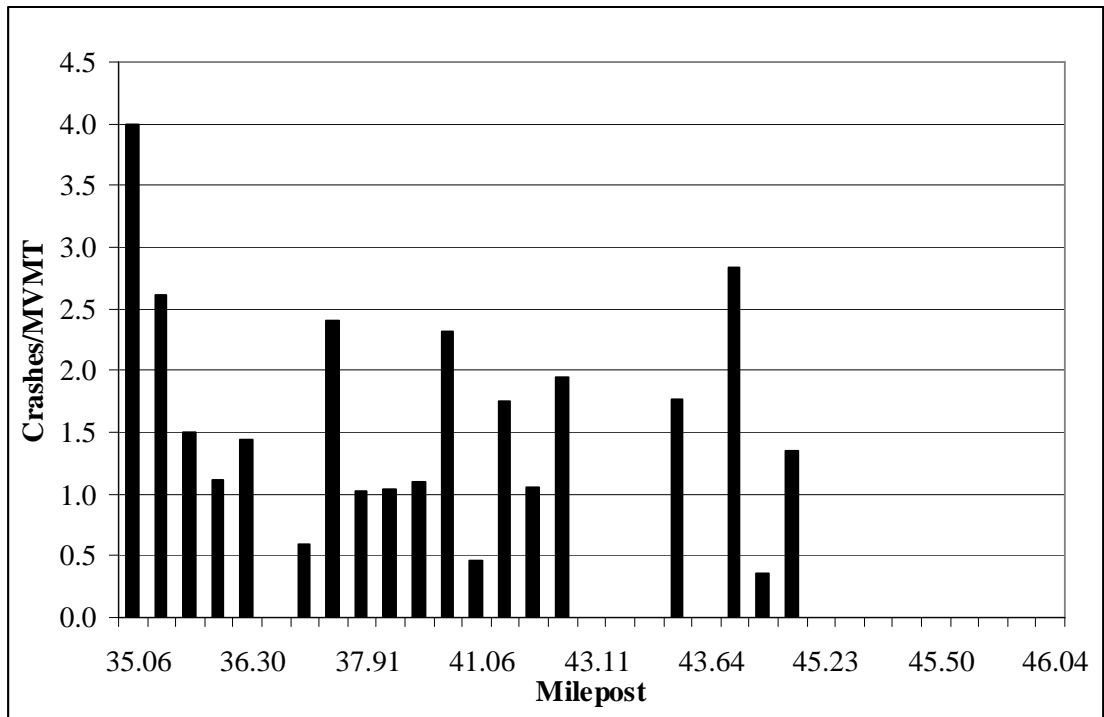


Figure 4-12: Plot of Crash History of US-40 Study Section (Crashes/MVMT), MP 35-MP 45 (2003-2005)

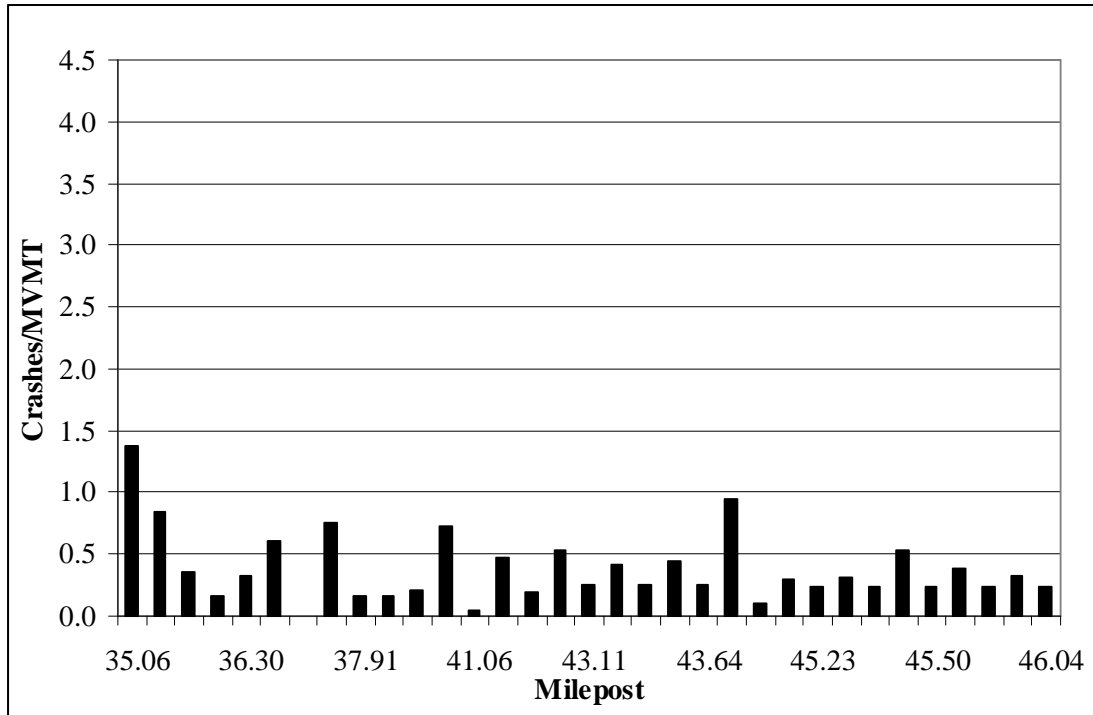


Figure 4-13: Plot of the Difference Between the CPM Results of US-40 Study Section in Crashes/MVMT Analyzed With and Without Crash History

A summary of statistics of the difference between the CPM results analyzed with and without crash history in crashes/MVMT is shown in Table 4-7. It shows that the mean difference in the number of crashes per MVMT between the two methods is less than 0.5, and the standard error of the mean is very small (0.050), resulting in the confidence interval of 0.285 and 0.481 at the 95% confidence level. Compared with the number of crashes, the relative difference in the number of crashes per MVMT between the prediction with and without crash history resulted larger the number of crashes per segment.

Table 4-7: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of US-40 Study Section

Mean	0.383
Standard Error	0.050
Median	0.290
Standard Deviation	0.285
Sample Variance	0.081

Table 4-7: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of US-40 Study Section (continued)

Kurtosis	3.670
Skewness	1.708
Range	1.380
Minimum	0.000
Maximum	1.380
Confidence Interval of the Mean (at the 95% Confidence Level)	0.285 – 0.481

4.1.4 Analysis of Crash Prediction Results of the US-40 Study Section

Before analyzing the crash prediction results, one thing needs to be kept in mind, that is, it is unrealistic to expect the CPM to have the capacity to predict the exact number of crashes in the future. The users must use the results to read a general trend in the output and determine the locations where a high number of crashes are likely to occur, instead of using the particular numbers of crashes presented by the CPM as “real” number of crashes that may occur.

Figure 4-6 and Figure 4-7, which show the number of crashes per segment, display similar trends but Figure 4-10 and Figure 4-11, which show the number of crashes per MVMT appear distinct to each other. Though the mean difference was small (less than 0.5 crashes), the relative amount of the mean difference is larger for the latter case. In the latter case, segments with similar crash rates per MVMT had similar physical characteristics; for instance, tangent segments have similar numbers of crashes per MVMT.

Based on the given prediction results and the crash history, two different interpretations can be made: either the CPM is not yet reliable to be used for this type of analysis, or the crash history of the US-40 study section is different from the ones used for the development of CPM. This finding prompted an in-depth analysis of the crash history used for the analysis before making any judgment.

Table 4-8 shows the detailed crash history data of the US-40 study section. It turned out that 60 percent of the crashes on the US-40 study section were caused by collisions with wild animals. This could become a potential problem because this factor is not fundamentally controlled by the engineering aspects of highway design. Surely, there can be a way to herd domestic animals to certain highway crossing points, but it is

difficult to guide wild animals to certain crossing points. Figure 4-14 shows where crashes with wild animals took place in the three year crash analysis period. As seen in the figure, they are scattered throughout the study section.

Table 4-8: Crash History Summary of the US-40 Study Section, MP 35-MP 45 (2003-2005)

Year	Direction	Milepost	Severity	Accident Type 1	Accident Type 2	Accident Type 3
2003	E	35.17	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	35.27	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	36.18	Bruises And Abrasions	Ran Off Roadway-Right	MV-Fixed Object	NULL
2003	E	36.49	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	36.76	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	38.05	No Injury	Ran Off Roadway-Left	Overtuned	NULL
2003	W	38.75	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	39.25	No Injury	Ran Off Roadway-Right	MV-Fixed Object	NULL
2003	W	39.54	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	40.73	No Injury	MV-Animal(Wild)	NULL	NULL
2003	W	41.13	No Injury	MV-Fixed Object	Ran Off Roadway-Right	NULL
2003	W	41.86	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	35.17	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	35.27	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	36.18	Bruises And Abrasions	Ran Off Roadway-Right	MV-Fixed Object	NULL

**Table 4-8: Crash History Summary of the US-40 Study Section, MP 35-MP 45 (2003-2005)
(continued)**

Year	Direction	Milepost	Severity	Accident Type 1	Accident Type 2	Accident Type 3
2003	E	36.49	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	36.76	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	38.05	No Injury	Ran Off Roadway-Left	Overtuned	NULL
2003	W	38.75	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	39.25	No Injury	Ran Off Roadway-Right	MV-Fixed Object	NULL
2003	W	39.54	No Injury	MV-Animal(Wild)	NULL	NULL
2003	E	40.73	No Injury	MV-Animal(Wild)	NULL	NULL
2003	W	41.13	No Injury	MV-Fixed Object	Ran Off Roadway-Right	NULL
2003	W	41.86	No Injury	MV-Animal(Wild)	NULL	NULL
2003	W	42.06	No Injury	Ran Off Roadway-Right	MV-Fixed Object	Ran Off Roadway-Left
2003	W	44.55	No Injury	MV-Animal(Wild)	NULL	NULL
2003	W	44.75	No Injury	MV-Animal(Wild)	NULL	NULL
2004	W	35.07	Bruises And Abrasions	Ran Off Roadway-Left	Overtuned	NULL
2004	E	35.27	No Injury	Overtuned	NULL	NULL
2004	W	35.67	No Injury	Ran Off Roadway-Right	MV-Other Object	Overtuned
2004	E	35.68	Fatal	MV-MV	NULL	NULL
2004	E	35.76	No Injury	MV-Animal(Wild)	NULL	NULL
2004	W	36.45	No Injury	Other Non-Collision	MV-Other Object	NULL

**Table 4-8: Crash History Summary of the US-40 Study Section, MP 35-MP 45 (2003-2005)
(continued)**

Year	Direction	Milepost	Severity	Accident Type 1	Accident Type 2	Accident Type 3
2004	E	37.01	Bruises And Abrasions	Ran Off Roadway-Right	Ran Off Roadway-Left	NULL
2004	E	37.36	No Injury	MV-Animal(Wild)	NULL	NULL
2004	E	37.95	Broken bones or bleeding wounds	MV-Animal(Wild)	Ran Off Roadway-Right	Overturned
2004	W	38.85	No Injury	MV-Animal(Wild)	NULL	NULL
2004	E	38.95	No Injury	MV-Animal(Wild)	MV-MV	MV-MV
2004	E	39.24	No Injury	MV-Animal(Wild)	NULL	NULL
2004	W	40.03	No Injury	MV-Animal(Wild)	NULL	NULL
2004	N	40.34	No Injury	MV-MV	Ran Off Roadway-Right	MV-Fixed Object
2004	W	40.44	No Injury	Ran Off Roadway-Right	Overturned	NULL
2004	W	43.00	No Injury	MV-Animal(Wild)	NULL	NULL
2004	W	43.76	No Injury	Ran Off Roadway-Right	MV-Fixed Object	Overturned
2004	W	44.65	No Injury	Ran Off Roadway-Right	Overturned	MV-Other Object
2004	E	44.65	Bruises And Abrasions	MV-MV	Overturned	MV-Fixed Object
2005	W	35.00	No Injury	MV-Animal(Wild)	NULL	NULL
2005	W	35.97	No Injury	MV-Animal(Wild)	NULL	NULL
2005	W	37.00	No Injury	MV-Animal(Wild)	NULL	NULL

**Table 4-8: Crash History Summary of the US-40 Study Section, MP 35-MP 45 (2003-2005)
(continued)**

Year	Direction	Milepost	Severity	Accident Type 1	Accident Type 2	Accident Type 3
2005	W	37.43	Fatal	Ran Off Roadway-Right	Overtuned	Ran Off Roadway-Left
2005	W	37.60	No Injury	MV-Animal(Wild)	NULL	NULL
2005	E	37.90	Broken bones or bleeding wounds	Ran Off Roadway-Right	Ran Off Roadway-Left	Overtuned
2005	W	40.00	No Injury	Ran Off Roadway-Left	MV-Other Object	NULL
2005	W	40.30	Possible Injury	Ran Off Roadway-Right	Overtuned	MV-Other Object
2005	W	40.30	No Injury	Ran Off Roadway-Right	MV-Fixed Object	NULL
2005	E	41.30	No Injury	MV-Animal(Wild)	NULL	NULL
2005	E	41.90	No Injury	MV-Animal(Wild)	NULL	NULL
2005	E	41.90	No Injury	MV-Animal(Wild)	NULL	NULL
2005	W	43.00	No Injury	MV-Animal(Wild)	NULL	NULL
2005	W	43.40	No Injury	MV-Animal(Wild)	NULL	NULL

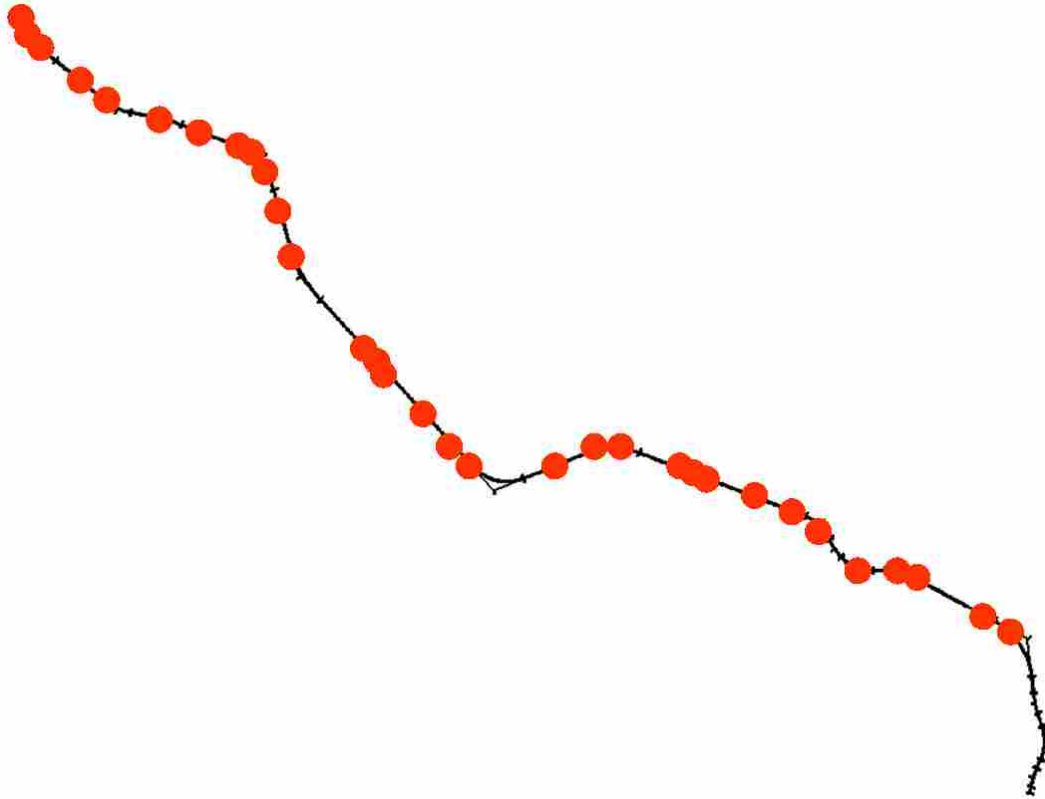


Figure 4-14: Plot of Crashes with Wild Animals in the US-40 Study Section from 2003 to 2005

In Figure 4-14 it is apparent that the crashes are scattered randomly throughout the study section, which makes it difficult to determine if any specific locations are more problematic than the others.

In order to identify locations with a high number of crashes caused by highway design it is necessary to focus on non-animal crashes. Figure 4-15 shows the locations with non-animal crashes. These crashes consist of vehicle collision, running-off roads, collision with static objects, etc. These non-animal crashes were plotted separately by the direction of travel, westbound and eastbound, as shown in Figure 4-16. Two locations seemed to have more crashes than other locations in the study section and their vertical alignments were subsequently examined for safety.

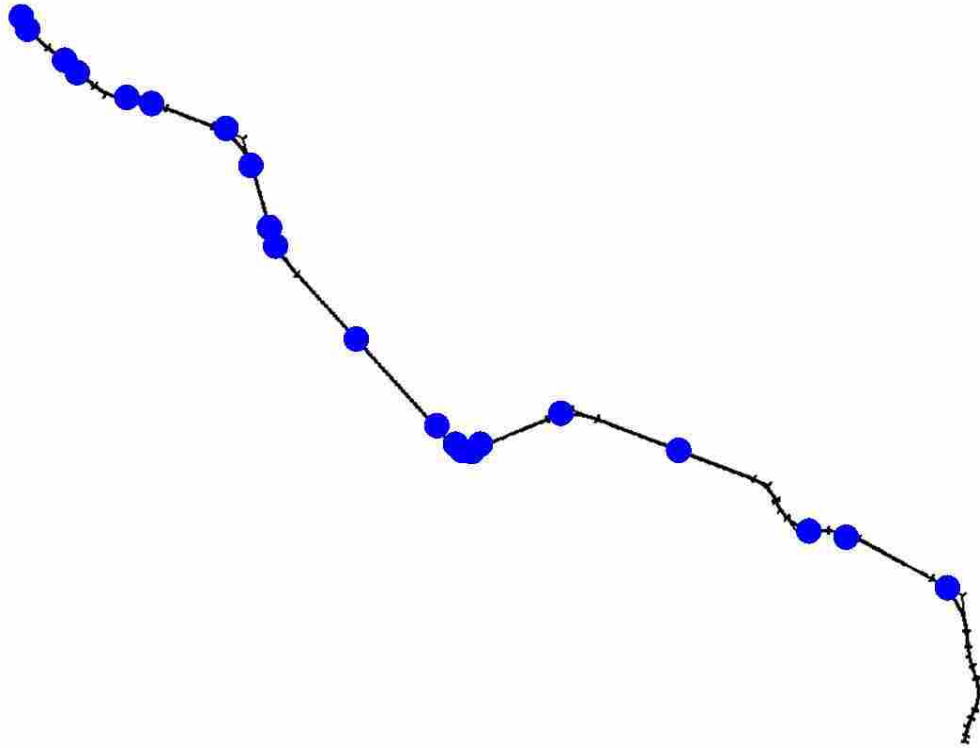


Figure 4-15: Plot of Non-Animal Crashes in the US-40 Study Section, From 2003 to 2005

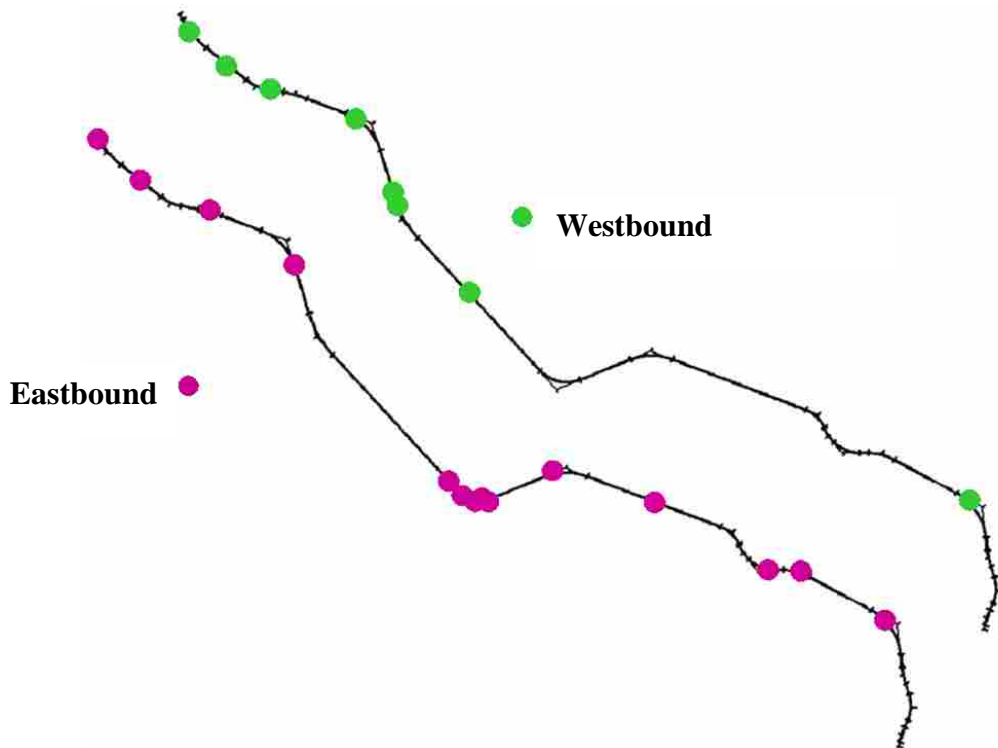


Figure 4-16: Plot of Non-Animal Crashes by Direction in the US-40 Study Section, 2003 to 2005

In Figure 4-15 one can immediately identify locations that could be problematic, such as the small curve at the mid location of the study section. Figure 4-16 gives another view of crash occurrence trend in the study section. The westbound has significantly more crashes than the eastbound, which makes one to think the approach to this small curve might have some geometric design issues. At this segment in the westbound direction, the highway's upslope begins, which may give a compound effect on crash occurrence. Figure 4-17 provides additional information regarding the vertical alignment of the section. Around MP 40, there is a sag vertical curve where horizontal curve change from a curve to a tangent. This combination of horizontal and vertical curve may have contributed to a higher number of crashes at this segment of the study section.

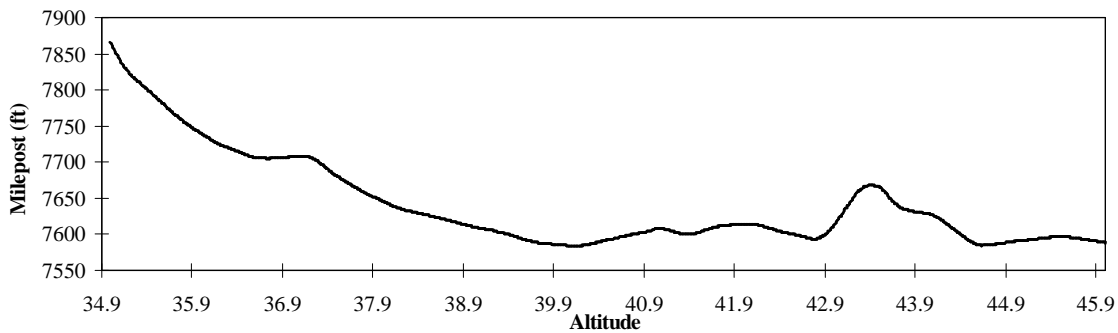


Figure 4-17: Vertical Alignment of the US-40 Study Section

Based on the discussions given so far, one can identify locations that can be “hot spots,” as shown in Figure 4-18. Figure 4-18 shows possible four “hot spots” that are located approximately at MP 37, MP 38, MP 40, and MP 41. These spots are all related to tangent-to-curve transition points or on a tight curve. Other factors also need to be considered because the alignment may not be the sole cause for these crashes, including the obstacles along the highway (such as high hills and pavement condition), inefficient traffic signs, and so forth.

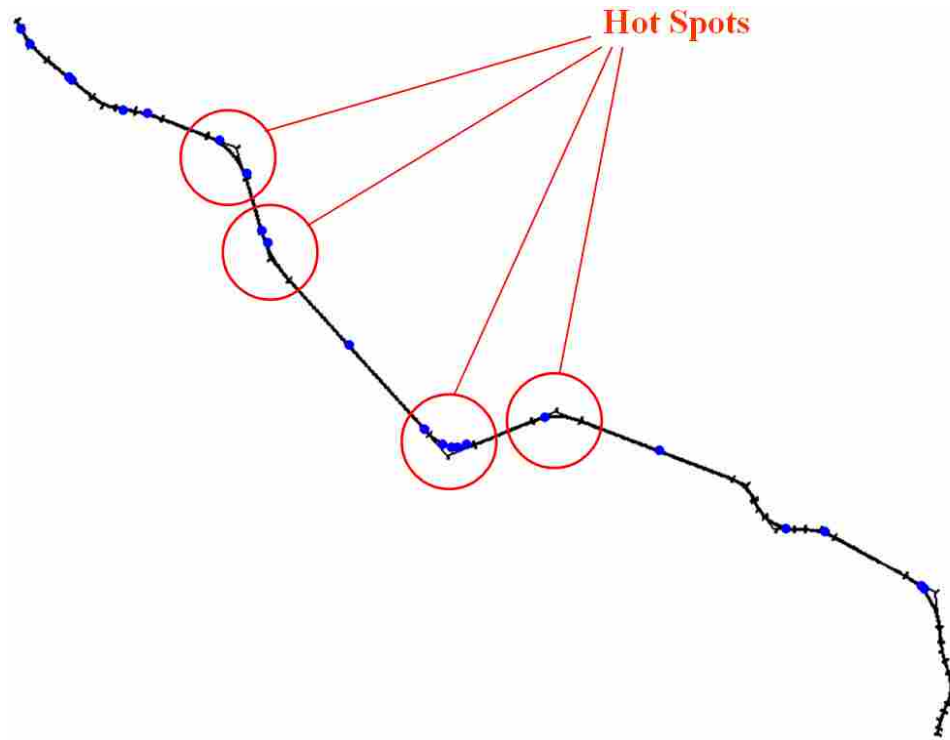


Figure 4-18: “Hot Spots” of US-40 Study Section

In conclusion, the crash prediction by CPM with the crash history appeared very dissimilar because 60 percent of the crashes at this site were caused by wild animals, while the crash prediction model without crash history assumes only 30 percent animal-related crashes.” Because the CPM does not provide a crash history input option for wild animal-related collisions, crash predictions by CPM should be used with caution for highway sections with a large number of crashes with wild animals.

4.2 US-6 Study Section

Located in UDOT Region 4, the US-6 study section, from MP 22 to MP 28 was selected for its high number of crashes. Several improvements have been made on this section over the years, and the most recent and major rehabilitation took place in 2005. Because the GPS data used for this study were collected before this major rehabilitation, the changes that were made by the rehabilitation work was not considered in the analysis.

4.2.1 Current Condition of the US-6 Study Section

Two sets of photographs of the study section are given in Figure 4-19 and Figure 4-20 to help the readers visualize the section. The photos in Figure 4-19 were copied from the Roadview Explorer website (UDOT 2007a). In general the road conditions of the study section are good; the pavement markings are clear, and the pavement is in good condition. Figure 4-20 shows two photos taken by the author during fall 2007. Compared to the US-40 study section the valley is narrower at this study section and the cuts are closer to the travel way. Figure 4-21 is a map extracted from the UDOT database and it shows the location of the US-6 study section (UDOT 2008). Refer back to Figure 4-1 for the location of the US-6 study section, which shows the relative locations of the three highway sections selected for this study.

In addition, a stretch of this portion of US-6 including the study section was reconstructed in summer 2007. However, because the changes made to the study section had not been updated in the GPS database kept by UDOT at the time this study was conducted, the GPS data extracted from the photolog database still reflected the road alignments before the reconstruction. Hence, the effect of the reconstruction was not considered in the study.



Figure 4-19: Photos of the US-6 Study Section in Summer 2005 (UDOT 2007a)



Figure 4-20: Photos of the US-40 Study Section in Fall 2007 (Taken by Kaitlin Chuo)



Figure 4-21: Location of the US-6 Study Section (UDOT 2008)

4.2.2 Centerline Alignments of the US-6 Study Section

Following the same method outlined previously and discussed in detail in Appendix, the centerline alignments of the study section were obtained and are summarized in Table 4-9 and Table 4-10 . As mentioned previously, the study section had major improvement work underway when the GPS data were collected; therefore, the outputs for this study section need to be interpreted with caution.

Table 4-9: Horizontal Alignment of the US-6 Study Section

Segment	Milepost		Radius (ft)
	From	To	
Tangent	22.00	22.01	---
Simple Curve	22.01	22.10	3500
Tangent	22.10	23.27	---
Simple Curve	23.27	23.50	12000
Tangent	23.50	24.35	---
Simple Curve	24.35	24.64	2800
Tangent	24.64	24.87	---

Table 4-9: Horizontal Alignment of the US-6 Study Section (continued)

Segment	Milepost		Radius (ft)
	From	To	
Simple Curve	24.87	25.04	1600
Tangent	25.04	25.05	---
Simple Curve	25.05	25.22	2800
Tangent	25.22	25.47	---
Simple Curve	25.47	25.55	1050
Tangent	25.55	25.57	---
Simple Curve	25.57	25.67	700
Tangent	25.67	25.71	---
Simple Curve	25.71	25.86	1950
Tangent	25.86	26.05	---
Simple Curve	26.05	26.14	5000
Tangent	26.14	26.17	---
Simple Curve	26.17	26.32	635
Tangent	26.32	26.40	---
Simple Curve	26.40	26.58	1200
Tangent	26.58	26.70	---
Simple Curve	26.70	26.79	550
Tangent	26.79	26.91	---
Simple Curve	26.91	27.06	520
Tangent	27.06	27.21	---
Simple Curve	27.21	27.47	1450
Tangent	27.47	27.63	---
Simple Curve	27.63	27.94	2900
Tangent	27.94	27.98	---

Table 4-10: Vertical Alignments of US-6 Study Section

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
22.08	3.09	0.62	2.47	0.62
22.28	2.47	2.01	3.27	2.01
22.48	3.27	225.31	1.02	225.31
22.80	1.02	465.12	-3.64	465.12
23.25	-3.64	138.97	-2.25	138.97
23.47	-2.25	63.43	-2.88	63.43
23.71	-2.88	67.73	-2.43	67.73
24.06	-2.43	886.67	-4.97	886.67
24.31	-4.97	259.02	-3.24	259.02
24.55	-3.24	105.63	-3.47	105.63
25.00	-3.47	1.29	-3.04	1.29

Table 4-10: Vertical Alignments of US-6 Study Section (continued)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
25.69	-3.04	1226.00	-5.09	1226.00
26.07	-5.09	44.61	-3.60	44.61
26.19	-3.60	52.14	-4.91	52.14
26.44	-4.91	62.65	-6.48	62.65
26.59	-6.48	22.22	-5.92	22.22
27.14	-5.92	47.61	-4.56	47.61
27.68	-4.56	12.64	-4.98	12.64

From the alignment data obtained from InRoads, as shown in Table 4-9 and Table 4-10, the graphical result is also displayed in Figure 4-22. Figure 4-22 shows the surrogate centerline alignment of the US-6 study section with mileposts for tangent and curve segments. Compare Figure 4-21 and Figure 4-22 for similarity of the actual and surrogate horizontal alignments.

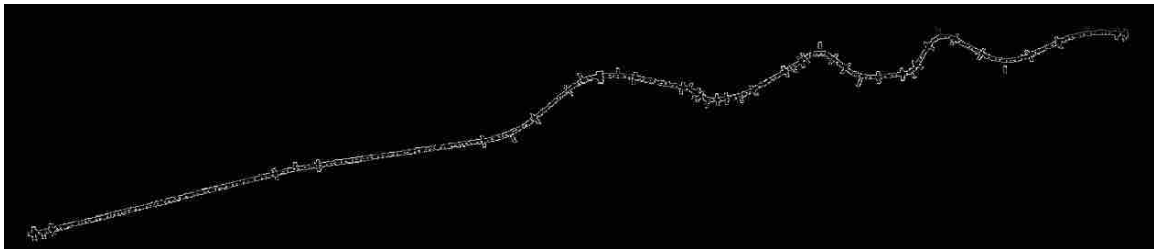


Figure 4-22: Surrogate Horizontal Alignment of the US-6 Study Section with Mileposts

4.2.3 Crash Prediction Results of the US-6 Study Section

To ensure the level of accuracy and minimize the differences in crash prediction estimates among the study sections, the same steps used for the US-40 study section was used for the US-6 study section. Table 4-11 shows the crash prediction results by the CPM in number of crashes from 2006 to 2008 and compares the crash history extracted from 2003 to 2005 (UDOT 2007b) against the predicted values. The three graphs shown in Figure 4-23, Figure 4-24, and Figure 4-25 visually present the data in Table 4-11. One must be cautious of the vertical scales used in the graphs when viewing them.

Table 4-11: Crash Prediction Results for the US-6 Study Section (Number of Crashes)

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
22.00	22.01	0.00	0.00	0.00	0.00
22.01	22.10	0.03	0.03	0.00	0.00
22.10	23.27	0.38	0.28	0.09	2.00
23.27	23.50	0.05	0.06	0.00	0.00
23.50	24.35	0.20	0.28	0.01	0.00
24.35	24.64	0.08	0.09	0.01	0.00
24.64	24.87	0.05	0.05	0.00	0.00
24.87	25.04	0.06	0.06	0.00	0.00
25.04	25.05	0.00	0.00	0.00	0.00
25.05	25.22	0.05	0.05	0.00	0.00
25.22	25.47	0.06	0.06	0.00	0.00
25.47	25.55	0.03	0.04	0.00	0.00
25.55	25.57	0.01	0.01	0.00	0.00
25.57	25.67	0.16	0.05	0.11	1.00
25.67	25.71	0.01	0.01	0.00	0.00
25.71	25.86	0.05	0.05	0.00	0.00
25.86	26.05	0.04	0.05	0.00	1.00
26.05	26.14	0.09	0.03	0.06	0.00
26.14	26.17	0.01	0.01	0.00	0.00
26.17	26.32	0.07	0.07	0.01	0.00
26.32	26.40	0.02	0.02	0.00	0.00
26.40	26.58	0.06	0.07	0.01	0.00
26.58	26.70	0.03	0.03	0.00	0.00
26.7	26.79	0.18	0.06	0.12	1.00
26.79	26.91	0.20	0.03	0.17	2.00
26.91	27.06	0.52	0.08	0.44	4.00
27.06	27.21	0.04	0.04	0.00	0.00
27.21	27.47	0.08	0.09	0.01	0.00
27.47	27.63	0.04	0.04	0.00	0.00
27.63	27.94	0.09	0.09	0.01	0.00
27.94	27.98	0.01	0.01	0.00	0.00

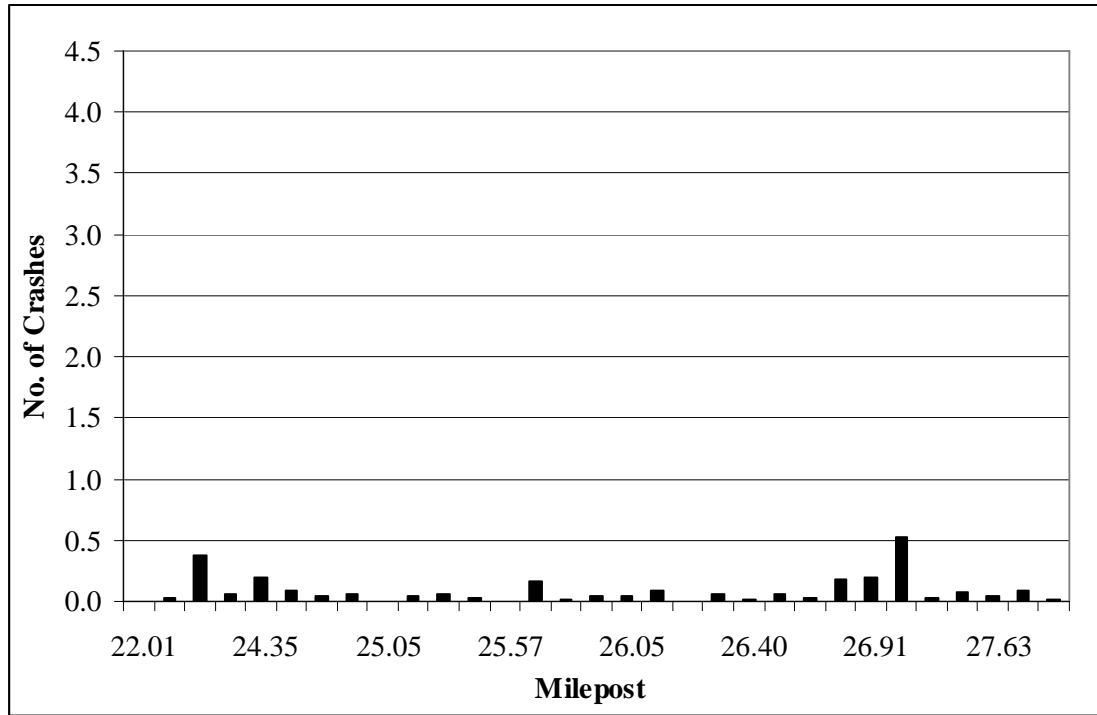


Figure 4-23: Plot of CPM Prediction Results of the US-6 Study Section (Number of Crashes), MP 22-MP 28 (2006-2008), Analyzed with Crash History

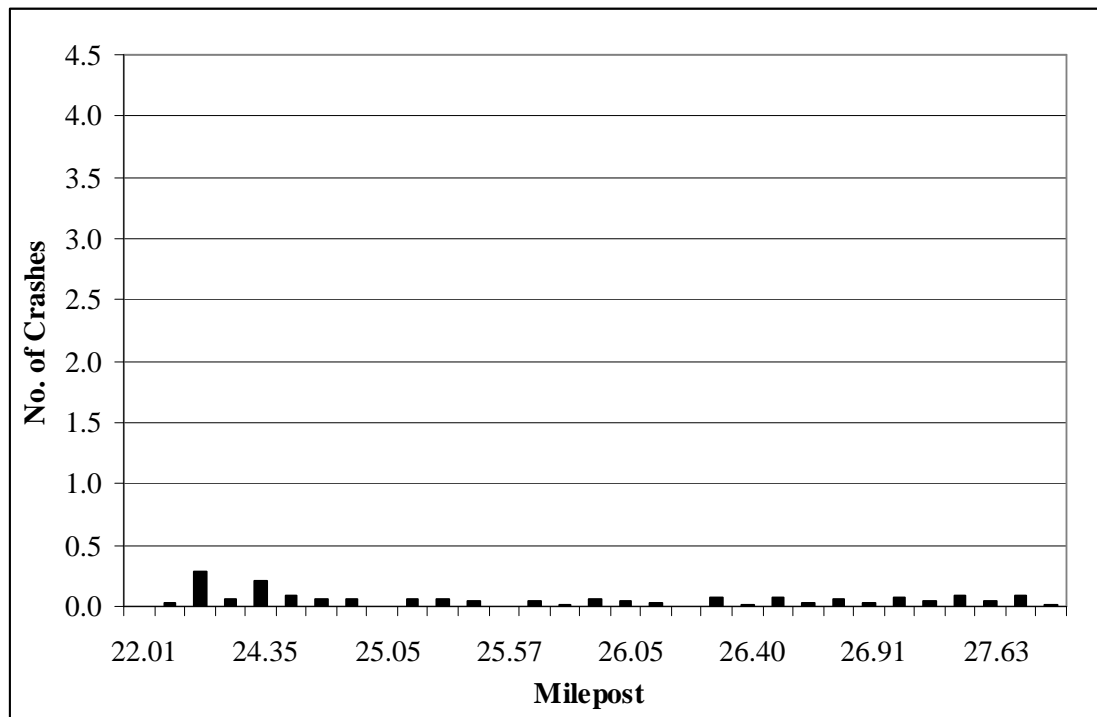


Figure 4-24: Plot of CPM Prediction Results of the US-6 Study Section (Number of Crashes), MP 22-MP 28 (2006-2008), Analyzed without Crash History

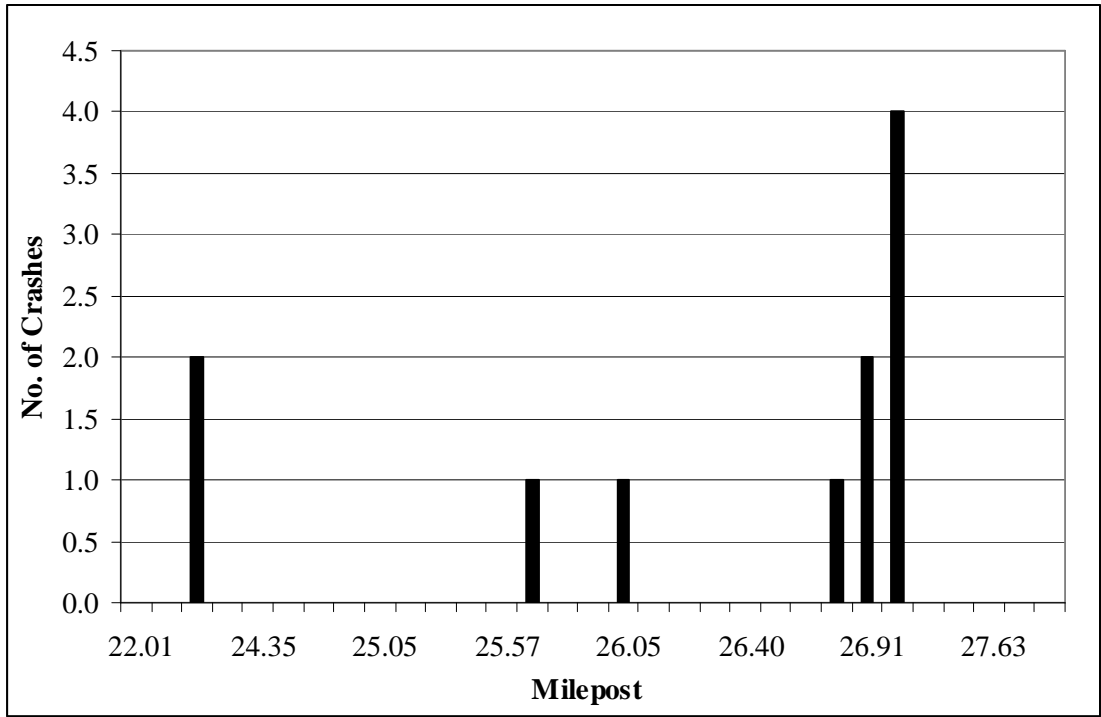


Figure 4-25: Plot of Crash History of US-6 Study Section (Number of Crashes), MP 22-MP 28 (2003-2005)

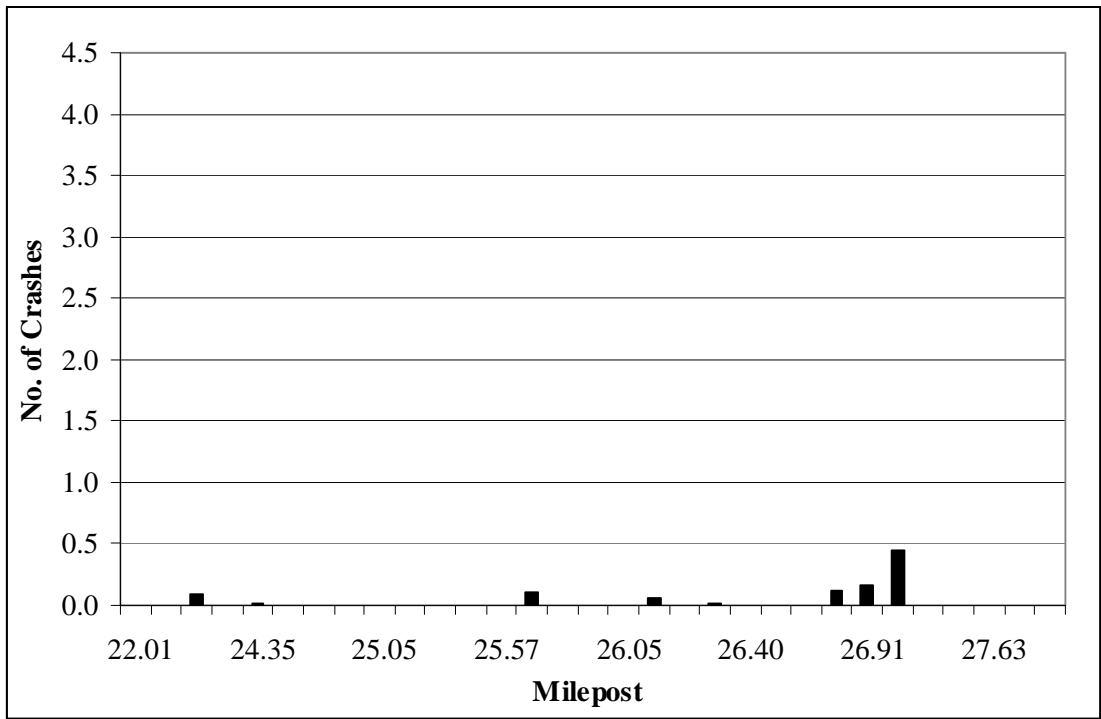


Figure 4-26: Plot of the Difference Between the CPM Results of US-6 Study Section in Number of Crashes Analyzed With and Without Crash History

A summary of statistics of the difference between the CPM results analyzed with and without crash history is shown in Table 4-12. It shows that the mean difference in the number of crashes between the two methods is less than 0.035, and the standard error of the mean is very small (0.016), resulting in the confidence interval of 0.004 and 0.066 at the 95 percent confidence level. From the statistics presented in Table 4-12 it can be said that the crash prediction without crash history is able to produce crash predictions that are similar to the crash prediction with crash history.

Again, graphical plots of the crash rate prediction results presented in Table 4-13 are also presented graphically in Figure 4-27, Figure 4-28, and Figure 4-29. Figure 4-27 shows higher crash rates near the beginning point of the study section and toward the end portion of the study section. This trend is similar to the actual crash history shown in Figure 4-28 and Figure 4-29.

Table 4-12: Statistics Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of US-6 Study Section

Mean	0.035
Standard Error	0.016
Median	0.004
Standard Deviation	0.086
Sample Variance	0.007
Kurtosis	16.569
Skewness	3.817
Range	0.440
Minimum	0.000
Maximum	0.440
Confidence Interval of the Mean (at the 95% Confidence Level)	0.004 – 0.066

Table 4-13: Crash Prediction Results for US-6 Study Sections, MP 22-MP 28 (crashes/MVMT)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
22.00	22.01	0.01	0.49	0.52	0.03	0.00
22.01	22.10	0.09	0.64	0.68	0.04	0.00

**Table 4-13: Crash Prediction Results for US-6 Study Sections,
MP 22- MP 28 (crashes/MVMT) (continued)**

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
23.27	23.50	0.23	0.50	0.53	0.03	0.00
23.50	24.35	0.85	0.49	0.52	0.03	0.00
24.35	24.64	0.29	0.60	0.65	0.05	0.00
24.64	24.87	0.22	0.49	0.52	0.03	0.00
24.87	25.04	0.17	0.70	0.76	0.06	0.00
25.04	25.05	0.01	0.49	0.51	0.02	0.00
25.05	25.22	0.17	0.62	0.67	0.05	0.00
25.22	25.47	0.25	0.49	0.51	0.02	0.00
25.47	25.55	0.08	0.95	1.06	0.11	0.00
25.55	25.57	0.03	0.49	0.51	0.02	0.00
25.57	25.67	0.09	3.65	1.16	2.49	22.84
25.67	25.71	0.04	0.49	0.52	0.03	0.00
25.71	25.86	0.15	0.71	0.77	0.06	0.00
25.86	26.05	0.19	0.50	0.53	0.03	11.3
26.05	26.14	0.09	2.09	0.64	1.45	0.00
26.14	26.17	0.03	0.49	0.52	0.03	0.00
26.17	26.32	0.15	0.92	1.02	0.10	0.00
26.32	26.40	0.08	0.50	0.53	0.03	0.00
26.4	26.58	0.18	0.77	0.84	0.07	0.00
26.58	26.70	0.12	0.51	0.54	0.03	0.00
26.70	26.79	0.09	4.24	1.37	2.87	22.99
26.79	26.91	0.11	3.65	0.54	3.11	37.10
26.91	27.06	0.15	7.42	1.14	6.28	57.13
27.06	27.21	0.16	0.5	0.53	0.03	0.00
27.21	27.47	0.25	0.69	0.75	0.06	0.00
27.47	27.63	0.16	0.50	0.53	0.03	0.00
27.63	27.94	0.31	0.61	0.66	0.05	0.00
27.94	27.98	0.04	0.50	0.53	0.03	0.00

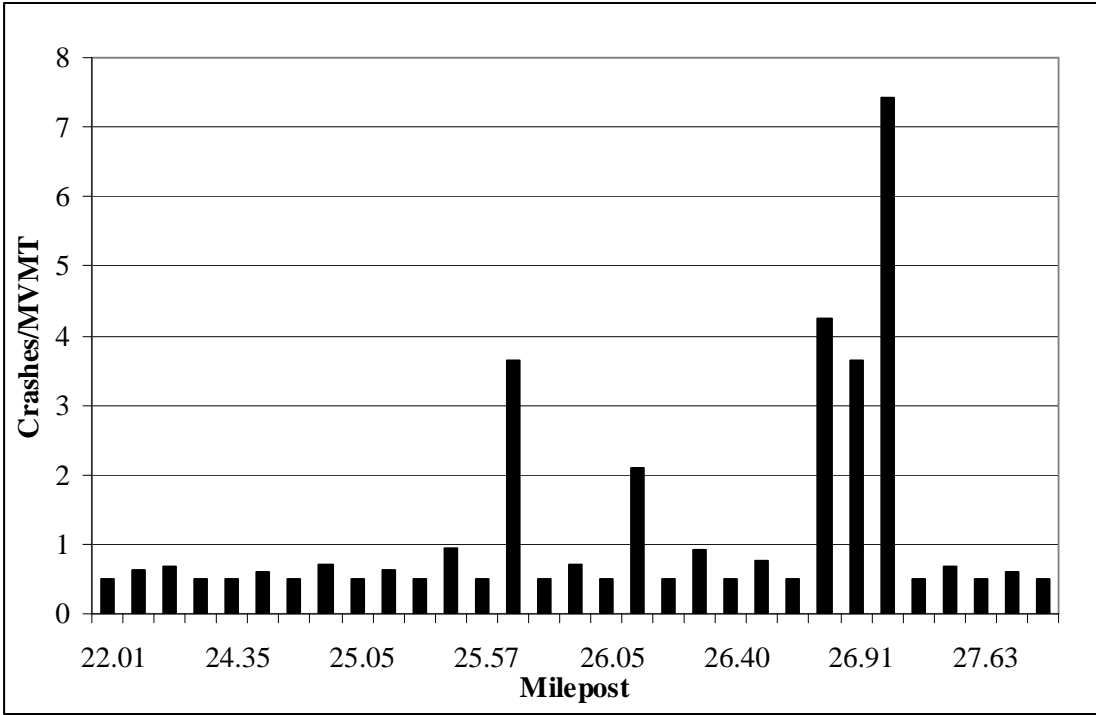


Figure 4-27: Plot of CPM Prediction Results of the US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2006-2008), Analyzed with Crash History

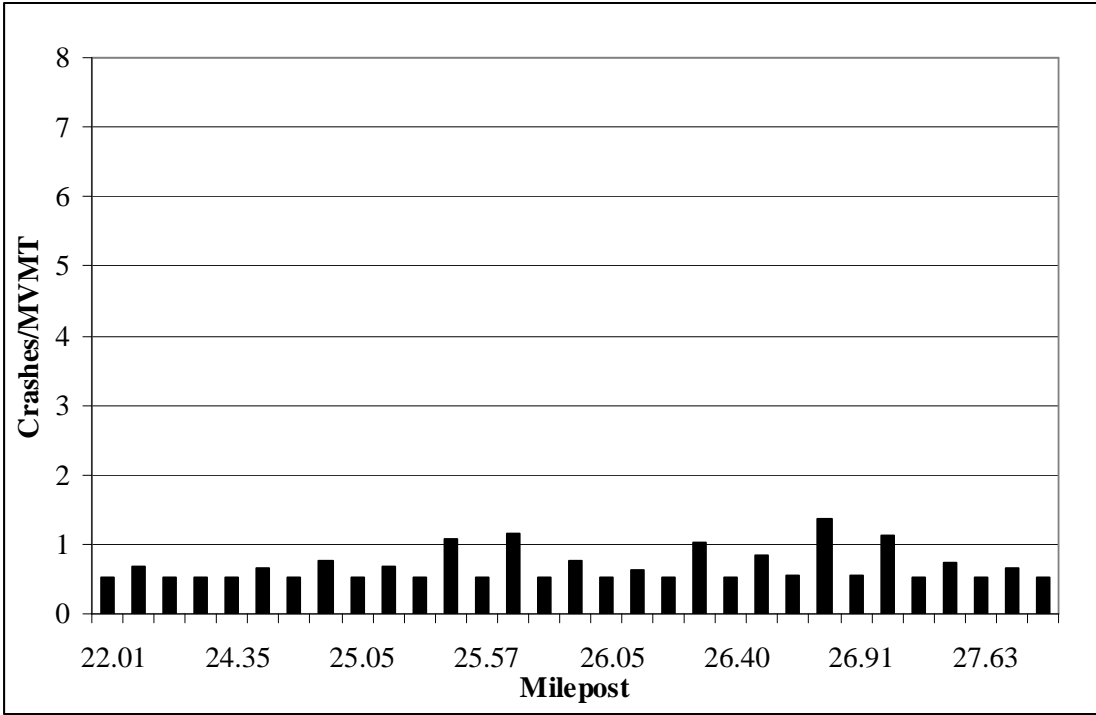


Figure 4-28: Plot of CPM Prediction Results of the US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2006-2008), Analyzed without Crash History

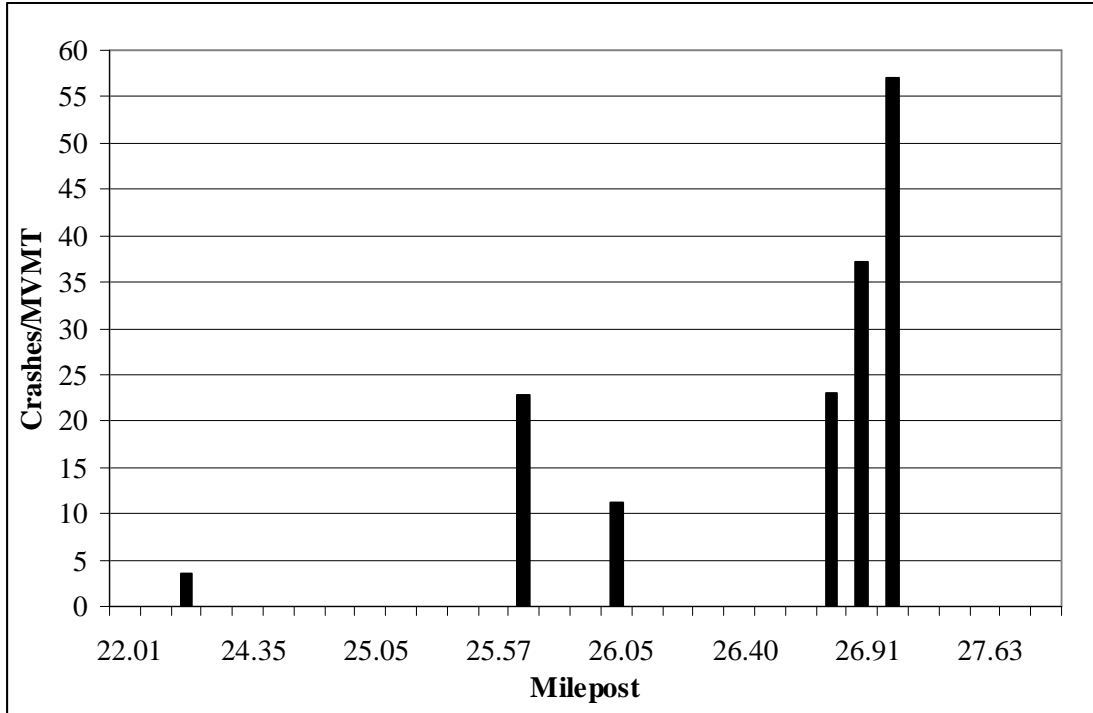


Figure 4-29: Plot of Crash History of US-6 Study Section (Crashes/MVMT), MP 22-MP 28 (2003-2005)

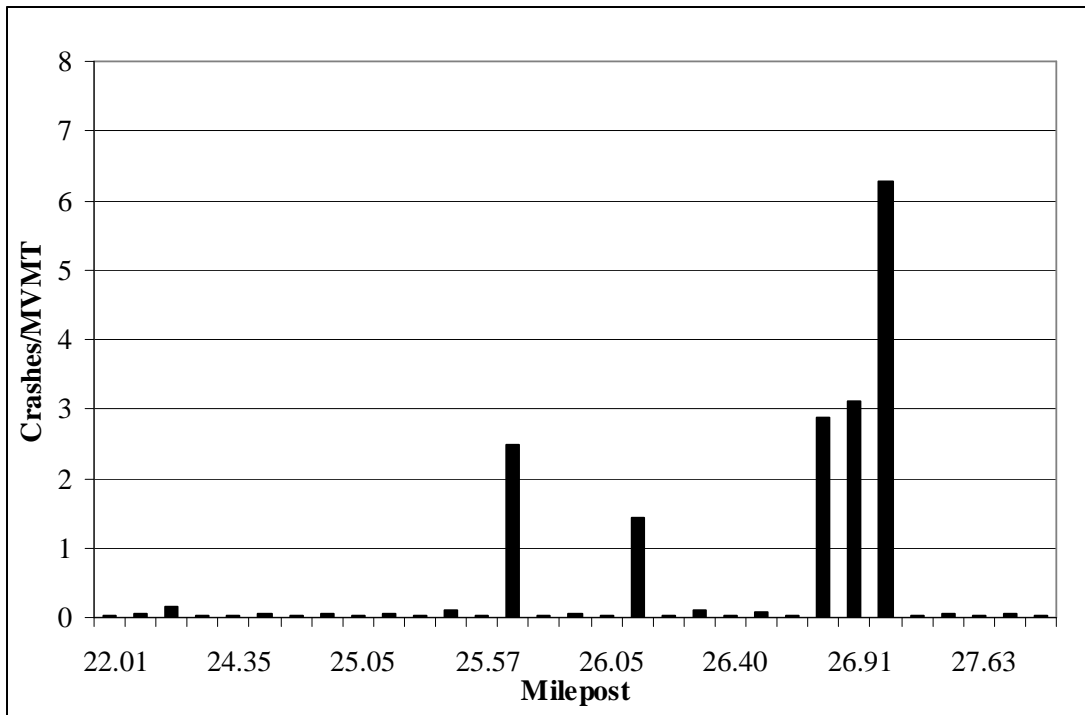


Figure 4-30: Plot of the Difference Between the CPM Results of US-6 Study Section in Crashes/MVMT Analyzed With and Without Crash History

A summary of statistics of the difference between the CPM results analyzed with and without crash history is shown in Table 4-14. It shows that the mean difference in the number of crashes between the two methods is less than 0.563, and the standard error of the mean is very small (0.245), resulting in the confidence interval of 0.083 and 1.043 at the 95 percent confidence level. Unlike the US 40 study section, these differences are more distinct. A large number of crashes near MP 27 may have skewed the results.

Table 4-14: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of US-6 Study Section

Mean	0.563
Standard Error	0.245
Median	0.040
Standard Deviation	1.365
Sample Variance	1.864
Kurtosis	10.212
Skewness	3.080
Range	6.260
Minimum	0.020
Maximum	6.280
Confidence Interval of the Mean (at the 95% Confidence Level)	0.083 – 1.043

4.2.4 Analysis of Crash Prediction Results of the US-6 Study Section

As mentioned previously, the crash prediction results are not expected to perfectly match the crash history; they are predicted values for the future. What is important to the user is to identify if the trend presented by CPM is similar to the crash history in general, thus identifying potential “hot spots” for safety audits before sending out a group of experts to the field.

Unlike the US-40 study section, the US-6 study section does not have any wild-animal related collisions. Table 4-15 gives a summary of the crash history of the US-6 study section. Only one domestic-animal related collision was reported during the study period while the others are either run-off-road or fixed-object-collisions.

Table 4-15: Crash History Summary of the US-6 Study Section, MP 22-MP28 (2003-2005)

Year	Direction	Milepost	Severity	Accident Type 1	Accident Type 2	Accident Type 3
2003	E	26.72	No Injury	Ran Off Roadway-Right	Other Non-Collision	MV-Fixed Object
2004	E	25.61	Broken bones or bleeding wounds	Ran Off Roadway-Right	MV-Fixed Object	Overtuned
2004	W	26.92	Bruises And Abrasions	Ran Off Roadway-Right	MV-Fixed Object	Overtuned
2004	W	26.98	Bruises And Abrasions	Ran Off Roadway-Right	Overtuned	NULL
2004	W	27	Broken bones or bleeding wounds	MV-Fixed Object	Ran Off Roadway-Right	MV-Fixed Object
2004	W	27.01	Broken bones or bleeding wounds	MV-Fixed Object	Ran Off Roadway-Right	Overtuned
2005	E	23	No Injury	Ran Off Roadway-Right	MV-MV	NULL
2005	E	26.9	Bruises And Abrasions	Ran Off Roadway-Left	MV-Fixed Object	NULL
2005	W	22.2	No Injury	MV-Animal (Domestic)	NULL	NULL
2005	W	26.1	Bruises And Abrasions	MV-Fixed Object	Ran Off Roadway-Right	Overtuned
2005	W	26.9	Possible Injury	Ran Off Roadway-Right	Overtuned	NULL

The US-6 study section has provided a better platform to evaluate the effectiveness of the CPM of IHSDM since the majority of the crashes in the study period did not contain any wild animal related collisions. Because most of the reported crashes were non-animal crashes, this study section seemed to be more related to highway design

issues. The CPM prediction results are therefore potentially more relevant and reliable for the type of use of this module, which is finding “hot spots” without every time collecting crash data.

By observing Figure 4-23 through Figure 4-28 one can see a pattern. At the beginning of the study section there appears to be a small increase in crash occurrence and rate, around MP 22 to MP 24, followed by a decrease up to approximately MP 26 where the crash occurrence and rate reach the highest point and decrease abruptly after that point. Only Figure 4-24 contradicts this general tendency, in which the crash prediction result is presented in number of crashes per segment without crash history. This difference raised concern that CPM’s predicted results obtained without the crash history might be unreliable. Referring to Figure 4-28, which is the CPM crash prediction results analyzed without crash history but presented in crashes per MVMT, one can see that the trend in Figure 4-28 fits the general tendency, though weakly, that the plots shown in the other figures.

4.3 SR-150 Study Section

The SR-150 study section is located in UDOT Region 1, which is a portion of a highway called the “Mirror Lake Highway.” It is a rural, recreational, and scenic route.

4.3.1 Current Condition of the SR-150 Study Section

The overall condition of the study section is good; the pavement markings are clearly visible, and the pavement is still in excellent condition. Two sets of photos are shown to help acquaint the reader with the study section. Figure 4-31 shows the photos taken during summer 2006 by UDOT’s photolog specialist (UDOT 2007a). From Figure 4-31 one can see the road is in good condition. The photos in Figure 4-32, on the other hand, were taken in fall 2007 on a rainy day. The inclement weather actually provided the author an opportunity to inspect the road from a different perspective, where the driver visibility was lower as well as lower friction between the tires and the pavement existed. Although the pavement appeared to be more slippery and dangerous to drive on, the author did not feel particularly unsafe driving on this stretch.



(a) MP 1, Eastbound



(b) MP 13, Westbound

Figure 4-31: Photos of the SR-150 Study Section in Summer 2005 (UDOT 2007a)



(a) MP 2, Eastbound



(b) MP 14, Westbound

Figure 4-32: Photos of the SR-150 Study Section in Fall 2007 (Taken by Kaitlin Chuo)

The section of SR-150 selected for the study contains locations where high crash rates occurred. Figure 4-33 shows the location of the SR-150 study section.

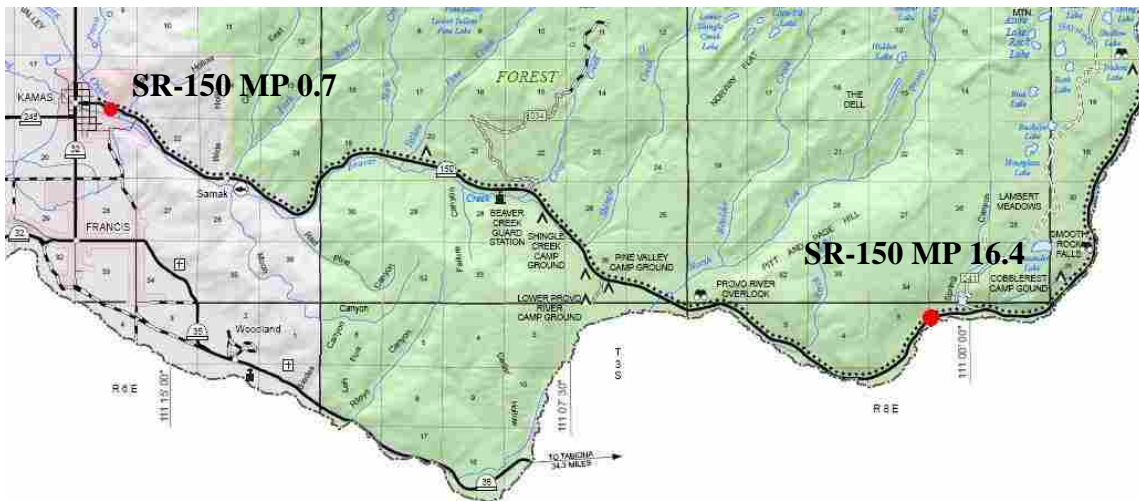


Figure 4-33: Location of the SR-150 Study Section (UDOT 2008)

4.3.2 Centerline Alignments of SR-150 Study Section

To be consistent with the other two study sections, the same method described in Appendix was used for obtaining surrogate horizontal and vertical alignments of the SR-150 study section. Table 4-16 shows the horizontal alignment and Table 4-17 shows the vertical alignment of the centerline of the study section. Figure 4-34 shows a plot of the surrogate centerline alignment of the study section with mileposts. Comparing Figure 4-33 and Figure 4-34 shows the similarity of the actual and surrogate horizontal alignments.

Table 4-16: Horizontal Alignment of the SR-150 Study Section

Segment	Milepost		Radius (ft)
	From	To	
Tangent	0.70	0.71	
Simple Curve	0.71	0.78	800
Tangent	0.78	0.81	
Simple Curve	0.81	0.88	1250
Tangent	0.88	0.97	
Simple Curve	0.97	1.05	1500
Tangent	1.05	1.13	
Simple Curve	1.13	1.27	2000
Tangent	1.27	1.38	
Simple Curve	1.38	1.44	2500
Tangent	1.44	1.47	
Simple Curve	1.47	1.54	1500
Tangent	1.54	1.59	
Simple Curve	1.59	1.66	2200
Tangent	1.66	1.72	
Simple Curve	1.72	1.81	1050
Tangent	1.81	2.09	
Simple Curve	2.09	2.17	6300
Tangent	2.18	2.50	
Simple Curve	2.50	2.60	1100
Tangent	2.60	2.69	
Simple Curve	2.69	2.79	2000
Tangent	2.79	2.85	
Simple Curve	2.85	2.94	1800
Tangent	2.94	3.04	
Simple Curve	3.04	3.09	2500
Tangent	3.09	3.23	

Table 4-16: Horizontal Alignment of the SR-150 Study Section (continued)

Segment	Milepost		Radius (ft)
	From	To	
Simple Curve	3.23	3.32	900
Tangent	3.32	3.54	
Simple Curve	3.54	3.64	2300
Tangent	3.64	3.78	
Simple Curve	3.78	3.82	5000
Tangent	3.82	3.94	
Simple Curve	3.94	4.08	6000
Tangent	4.08	4.13	
Simple Curve	4.13	4.34	980
Tangent	4.34	4.40	
Simple Curve	4.40	4.49	1100
Tangent	4.49	4.56	
Simple Curve	4.56	4.61	1500
Tangent	4.61	4.62	
Simple Curve	4.62	4.68	1500
Tangent	4.68	4.86	
Simple Curve	4.86	5.04	1600
Tangent	5.04	5.18	
Simple Curve	5.18	5.32	1120
Tangent	5.32	5.37	
Simple Curve	5.37	5.50	800
Tangent	5.50	5.55	
Simple Curve	5.55	5.69	1150
Tangent	5.69	5.71	
Simple Curve	5.71	6.08	3700
Tangent	6.08	7.24	
Simple Curve	7.24	7.46	2400
Tangent	7.46	7.51	
Simple Curve	7.51	8.12	4600
Tangent	8.12	8.52	
Simple Curve	8.52	8.94	2300
Tangent	8.94	9.14	
Simple Curve	9.14	9.29	5000
Tangent	9.29	9.89	
Simple Curve	9.89	10.09	2800
Tangent	10.09	10.21	
Simple Curve	10.21	10.73	2850
Tangent	10.73	11.13	
Simple Curve	11.13	11.29	3300
Tangent	11.29	12.00	
Simple Curve	12.00	12.24	1900

Table 4-16: Horizontal Alignment of the SR-150 Study Section (continued)

Segment	Milepost		Radius (ft)
	From	To	
Tangent	12.24	12.60	
Simple Curve	12.60	12.74	1190
Tangent	12.74	12.91	
Simple Curve	12.91	13.00	1500
Tangent	13.00	13.19	
Simple Curve	13.19	13.32	12000
Tangent	13.32	13.59	
Simple Curve	13.59	13.73	1650
Tangent	13.73	13.89	
Simple Curve	13.89	14.21	3300
Tangent	14.21	14.27	
Tangent	15.20	15.41	
Simple Curve	15.41	15.54	1700
Tangent	15.54	15.65	
Simple Curve	15.65	15.92	5500
Tangent	15.92	16.08	
Simple Curve	16.08	16.24	1450
Tangent	16.24	16.33	
Simple Curve	16.33	16.38	1300
Tangent	16.38	16.39	

Table 4-17: Vertical Alignment of the SR-150 Study Section

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
0.83	6.36	434.33	0.75	434.33
0.95	0.75	11.00	1.85	11.00
0.97	1.85	21.84	1.22	21.84
1.08	1.22	330.51	-0.52	330.51
1.27	-0.52	484.40	0.62	484.40
1.68	0.62	349.31	3.12	349.31
2.07	3.12	437.72	-1.26	437.72
2.25	-1.26	209.54	0.59	209.54
2.56	1.21	362.01	5.47	362.01
2.78	5.47	425.15	-0.61	425.15
2.96	-0.61	252.35	4.44	252.35
3.07	4.44	216.49	1.55	216.49
4.33	2.84	50.00	3.86	50.00
4.37	3.86	10.00	1.98	10.00

Table 4-17: Vertical Alignment of the SR-150 Study Section (continued)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
4.46	1.98	28.80	0.83	28.80
4.49	0.83	19.02	2.73	19.02
4.50	2.73	2.93	1.56	2.93
4.51	1.56	6.93	2.25	6.93
4.53	2.25	75.12	1.25	75.12
4.81	1.25	93.82	2.82	93.82
4.91	2.82	26.99	3.49	26.99
4.96	3.49	180.00	1.09	180.00
5.09	1.09	4.39	1.53	4.39
5.35	1.53	5.67	1.72	5.67
5.98	1.72	38.01	3.24	38.01
6.32	3.24	49.77	4.90	49.77
6.69	4.90	504.33	-2.31	504.33
6.88	-2.31	130.32	0.30	130.32
6.94	0.30	144.07	2.22	144.07
7.25	2.22	37.85	0.96	37.85
7.43	0.96	71.57	1.80	71.57
7.66	1.80	124.42	3.88	124.42
7.81	3.88	53.81	2.08	53.81
7.93	2.08	94.68	3.35	94.68
8.25	3.35	231.43	5.36	231.43
8.38	5.36	379.42	0.30	379.42
8.47	0.30	45.77	1.82	45.77
8.57	1.82	82.85	3.90	82.85
8.63	3.90	179.65	2.46	179.65
8.75	2.46	117.92	0.10	117.92
8.86	0.10	108.81	1.31	108.81
8.98	1.31	197.76	4.35	197.76
9.13	4.35	5.00	3.04	5.00
9.20	3.04	30.00	4.44	30.00
9.23	4.44	95.00	2.36	95.00
9.27	2.36	65.00	3.27	65.00
9.32	3.27	15.00	3.82	15.00
9.42	3.82	75.00	2.94	75.00
9.48	2.94	50.00	4.54	50.00
9.50	4.54	5.00	3.26	5.00
9.50	3.26	2.50	4.22	2.50
9.52	4.22	50.00	3.82	50.00
9.60	3.82	125.00	6.01	125.00
9.93	6.01	500.00	-1.99	500.00
10.13	-1.99	300.00	-0.88	300.00

Table 4-17: Vertical Alignment of the SR-150 Study Section (continued)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
10.26	-0.88	350.00	-2.30	350.00
10.42	-2.30	40.00	-1.80	40.00
10.56	-1.80	100.00	-5.17	100.00
10.61	-5.17	135.00	-3.43	135.00
10.66	-3.43	25.00	-4.12	25.00
10.72	-4.12	50.00	-1.93	50.00
10.77	-1.93	175.00	-0.43	175.00
11.12	-1.57	50.00	-0.71	50.00
11.19	-0.71	200.00	-3.03	200.00
11.31	-3.03	175.00	0.99	175.00
11.47	0.99	100.00	-1.03	100.00
11.61	-1.03	150.00	4.51	150.00
11.80	4.51	200.00	5.78	200.00
11.92	5.78	200.00	3.59	200.00
12.04	3.59	190.00	5.77	190.00
12.16	5.77	50.00	4.84	50.00
12.24	4.84	250.00	0.55	250.00
12.33	0.55	200.00	1.24	200.00
12.38	1.24	15.00	0.68	15.00
12.55	0.68	150.00	2.74	150.00
12.63	2.74	50.00	-1.80	50.00
12.73	-1.80	40.00	-5.79	40.00
12.76	-5.79	100.00	-2.98	100.00
12.82	-2.98	50.00	1.84	50.00
12.89	1.84	100.00	3.84	100.00
12.92	3.84	10.00	0.53	10.00
12.94	0.53	35.00	-1.28	35.00
12.95	-1.28	0.50	0.32	0.50
12.95	0.32	7.50	-0.25	7.50
12.96	-0.25	2.50	-0.83	2.50
12.96	-0.83	2.50	-1.17	2.50
12.96	-1.17	0.50	1.30	0.50
12.96	1.30	5.00	0.80	5.00
12.97	0.80	0.01	1.10	0.01
12.97	1.10	5.00	0.51	5.00
12.97	0.51	1.50	0.20	1.50
12.97	0.20	0.25	2.12	0.25
12.97	2.12	12.50	0.94	12.50
12.98	0.94	5.00	0.36	5.00
12.98	0.36	0.10	1.66	0.10
12.99	1.66	15.00	0.50	15.00

Table 4-17: Vertical Alignment of the SR-150 Study Section (continued)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
12.99	0.50	2.50	1.77	2.50
13.00	1.77	15.00	0.68	15.00
13.00	0.68	5.00	1.46	5.00
13.01	1.46	2.50	2.28	2.50
13.02	2.28	2.50	1.97	2.50
13.04	1.97	40.00	3.32	40.00
13.16	3.32	140.00	0.50	140.00
13.34	0.50	50.00	1.59	50.00
13.57	1.59	150.00	1.38	150.00
13.75	1.38	100.00	2.73	100.00
13.82	2.73	50.00	0.44	50.00
13.85	0.44	25.00	1.48	25.00
13.89	1.48	50.00	-0.70	50.00
13.93	-0.70	100.00	0.84	100.00
14.03	0.84	100.00	0.25	100.00
14.13	0.25	50.00	-0.43	50.00
14.15	-0.43	10.00	0.45	10.00
14.16	0.45	16.00	-0.59	16.00
14.18	-0.59	30.00	0.56	30.00
14.26	0.56	20.00	-0.01	20.00
14.37	-0.01	50.00	1.21	50.00
14.50	1.21	50.00	2.26	50.00
14.64	2.26	150.00	3.50	150.00
14.71	3.50	105.00	0.47	105.00
14.76	0.47	50.00	-0.81	50.00
14.85	-0.81	150.00	1.88	150.00
14.92	1.88	5.00	0.75	5.00
14.93	0.75	10.00	1.69	10.00
14.93	1.69	1.00	0.00	1.00
14.94	0.00	15.00	1.38	15.00
14.94	1.38	7.50	-0.72	7.50
14.95	-0.72	10.00	0.32	10.00
14.95	0.32	15.00	-0.47	15.00
14.96	-0.47	12.00	0.81	12.00
14.96	0.81	1.50	1.42	1.50
14.96	1.42	0.50	0.33	0.50
14.97	0.33	10.00	1.82	10.00
14.97	1.82	0.40	2.18	0.40
14.97	2.18	0.40	2.48	0.40
14.97	2.48	0.50	1.02	0.50
14.98	1.01	7.50	1.73	7.50

Table 4-17: Vertical Alignment of the SR-150 Study Section (continued)

Milepost	Back Grade (%)	Back Length (ft)	Forward Grade (%)	Forward Length (ft)
14.98	1.73	5.00	2.58	5.00
14.98	2.58	0.10	2.95	0.10
14.98	2.95	0.50	3.28	0.50
14.98	3.28	0.10	1.83	0.10
14.99	1.83	0.50	1.97	0.50
14.99	1.97	1.00	2.89	1.00
14.99	2.89	0.10	1.45	0.10
15.00	1.45	0.10	1.99	0.10
15.00	1.99	0.05	1.29	0.05
15.01	1.29	0.10	2.08	0.10
15.01	2.08	0.01	1.54	0.01
15.02	1.54	0.25	2.40	0.25
15.02	2.40	0.25	2.08	0.25
15.25	2.08	15.00	1.49	15.00
15.29	1.49	100.00	2.33	100.00
15.32	2.33	2.50	2.74	2.50
15.35	2.74	50.00	2.04	50.00
15.37	2.04	10.00	2.54	10.00
15.39	2.54	5.00	1.83	5.00
15.42	1.83	10.00	3.27	10.00
15.46	3.27	2.50	2.83	2.50
15.48	2.83	2.50	-1.35	2.50
15.53	-1.35	10.00	7.73	10.00
15.56	7.73	2.50	4.48	2.50
15.60	4.48	5.00	1.37	5.00
15.66	1.37	20.00	2.15	20.00
15.76	2.15	25.00	0.35	25.00
15.80	0.35	50.00	2.28	50.00
15.85	2.28	50.00	1.15	50.00
15.91	1.15	50.00	2.83	50.00
16.01	2.83	25.00	2.25	25.00
16.06	2.25	10.00	0.99	10.00
16.10	0.99	100.00	4.08	100.00
16.17	4.08	100.00	1.12	100.00
16.20	1.12	50.00	5.26	50.00
16.25	5.26	10.00	3.21	10.00
16.29	3.21	20.00	-2.35	20.00
16.30	-2.35	5.00	3.90	5.00

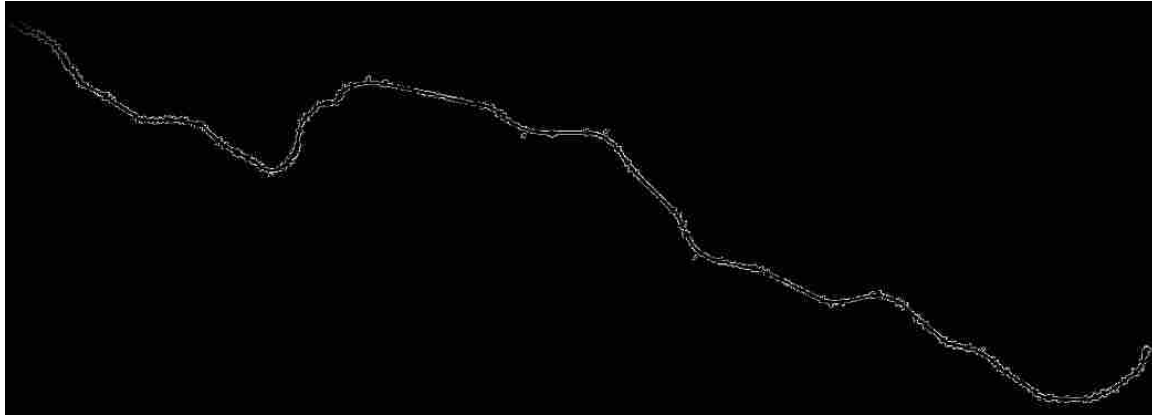


Figure 4-34: Surrogate horizontal Alignment of the SR-150 Study Section with Mileposts

4.3.3 Crash Prediction Results of the SR-150 Study Section

The centerline alignments of the SR-150 study section were entered into the CPM together with necessary data. The results of crash prediction in number of crashes are shown in Table 4-18. The results shown in Table 4-18 are graphically presented in Figure 4-35 and Figure 4-36, and Figure 4-37. These three figures show that segments near MP 5.7 seem to have a very high occurrence of crashes. Figure 4-38 is the graph that shows the difference between the CPM results analyzed with and without crash history.

Table 4-18: Crash Prediction Results for SR-150 Study Section, MP 0.7-MP 16.4 (Number of Crashes)

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
0.7	0.71	0.00	0.01	0.01	0.00
0.71	0.78	0.10	0.14	0.04	0.00
0.78	0.81	0.02	0.02	0.00	0.00
0.81	0.88	0.09	0.12	0.03	0.00
0.88	0.97	0.21	0.06	0.15	2.00
0.97	1.05	0.33	0.11	0.22	0.00
1.05	1.13	0.06	0.07	0.01	0.00

**Table 4-18: Crash Prediction Results for SR-150 Study Section,
MP 0.7-MP 16.4 (Number of Crashes) (continued)**

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
1.13	1.27	0.12	0.15	0.03	0.00
1.27	1.38	0.07	0.09	0.02	0.00
1.38	1.44	0.06	0.08	0.02	0.00
1.44	1.47	0.02	0.02	0.00	1.00
1.47	1.54	0.33	0.10	0.23	0.00
1.54	1.59	0.03	0.04	0.01	0.00
1.59	1.66	0.07	0.09	0.02	0.00
1.66	1.72	0.20	0.05	0.15	1.00
1.72	1.81	0.11	0.14	0.03	0.00
1.81	2.09	0.34	0.22	0.12	1.00
2.09	2.17	0.06	0.08	0.02	0.00
2.18	2.50	0.37	0.25	0.12	1.00
2.50	2.60	0.10	0.14	0.04	0.00
2.60	2.69	0.06	0.08	0.02	0.00
2.69	2.79	0.33	0.13	0.20	1.00
2.79	2.85	0.03	0.04	0.01	0.00
2.85	2.94	0.08	0.11	0.03	0.00
2.94	3.04	0.23	0.08	0.15	1.00
3.04	3.09	0.06	0.07	0.01	0.00
3.09	3.23	0.09	0.11	0.02	0.00
3.23	3.32	0.10	0.14	0.04	0.00
3.32	3.54	0.14	0.17	0.03	0.00
3.54	3.64	0.09	0.11	0.02	0.00
3.64	3.78	0.09	0.11	0.02	0.00
3.78	3.82	0.24	0.04	0.20	1.00
3.82	3.94	0.08	0.10	0.02	0.00
3.94	4.08	0.28	0.13	0.15	1.00
4.08	4.13	0.03	0.04	0.01	0.00
4.13	4.34	0.43	0.26	0.17	1.00
4.34	4.40	0.04	0.04	0.00	0.00
4.4	4.49	0.36	0.14	0.22	1.00
4.49	4.56	0.04	0.05	0.01	0.00

**Table 4-18: Crash Prediction Results for SR-150 Study Section,
MP 0.7-MP 16.4 (Number of Crashes) (continued)**

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
4.62	4.68	0.07	0.1	0.03	0.00
4.68	4.86	0.12	0.14	0.02	0.00
4.86	5.04	0.38	0.21	0.17	0.00
5.04	5.18	0.09	0.10	0.01	1.00
5.18	5.32	0.14	0.18	0.04	0.00
5.32	5.37	0.03	0.04	0.01	0.00
5.37	5.5	0.14	0.19	0.05	0.00
5.5	5.55	0.03	0.04	0.01	0.00
5.55	5.69	0.14	0.19	0.05	0.00
5.69	5.71	0.01	0.01	0.00	0.00
5.71	6.08	0.47	0.35	0.12	1.00
6.08	7.24	1.42	0.92	0.50	4.00
7.24	7.46	0.18	0.22	0.04	0.00
7.46	7.51	0.04	0.05	0.01	0.00
7.51	8.12	0.45	0.55	0.10	0.00
8.12	8.52	0.42	0.31	0.11	1.00
8.52	8.94	0.53	0.42	0.11	1.00
8.94	9.14	0.14	0.16	0.02	0.00
9.14	9.29	0.12	0.14	0.02	0.00
9.29	9.89	0.58	0.49	0.09	1.00
9.89	10.09	0.16	0.20	0.04	0.00
10.09	10.21	0.08	0.10	0.02	0.00
10.21	10.73	0.59	0.50	0.09	1.00
10.73	11.13	0.42	0.31	0.11	1.00
11.13	11.29	0.13	0.16	0.03	0.00
11.29	12.00	0.95	0.56	0.39	3.00
12.00	12.24	0.42	0.28	0.14	1.00
12.24	12.6	0.23	0.27	0.04	0.00
12.60	12.74	0.14	0.19	0.05	0.00
12.74	12.91	0.11	0.13	0.02	0.00
12.91	13.00	0.09	0.12	0.03	0.00
13.00	13.19	0.13	0.15	0.02	0.00

**Table 4-18: Crash Prediction Results for SR-150 Study Section,
MP 0.7-MP 16.4 (Number of Crashes) (continued)**

Milepost		No. of Crashes (2006-2008)			No. of Crashes (2003-2005)
From	To	with Crashes	w/o Crashes	Diff.	Crash History
13.19	13.32	0.09	0.11	0.02	0.00
13.32	13.59	0.17	0.21	0.04	0.00
13.59	13.73	0.13	0.17	0.04	0.00
13.73	13.89	0.10	0.12	0.02	0.00
13.89	14.21	0.42	0.30	0.12	1.00
14.21	14.27	0.04	0.05	0.01	0.00
14.27	14.41	0.10	0.12	0.02	0.00
14.41	14.83	0.44	0.33	0.11	1.00
14.83	14.99	0.14	0.17	0.03	0.00
14.99	15.03	0.03	0.03	0.00	0.00
15.03	15.2	0.13	0.16	0.03	0.00
15.20	15.41	0.14	0.16	0.02	0.00
15.41	15.54	0.35	0.16	0.19	1.00
15.54	15.65	0.07	0.08	0.01	0.00
15.65	15.92	0.20	0.24	0.04	0.00
15.92	16.08	0.10	0.12	0.02	0.00
16.08	16.24	0.15	0.19	0.04	0.00
16.24	16.33	0.06	0.07	0.01	0.00
16.33	16.38	0.07	0.10	0.03	0.00
16.38	16.39	0.01	0.01	0.00	0.00

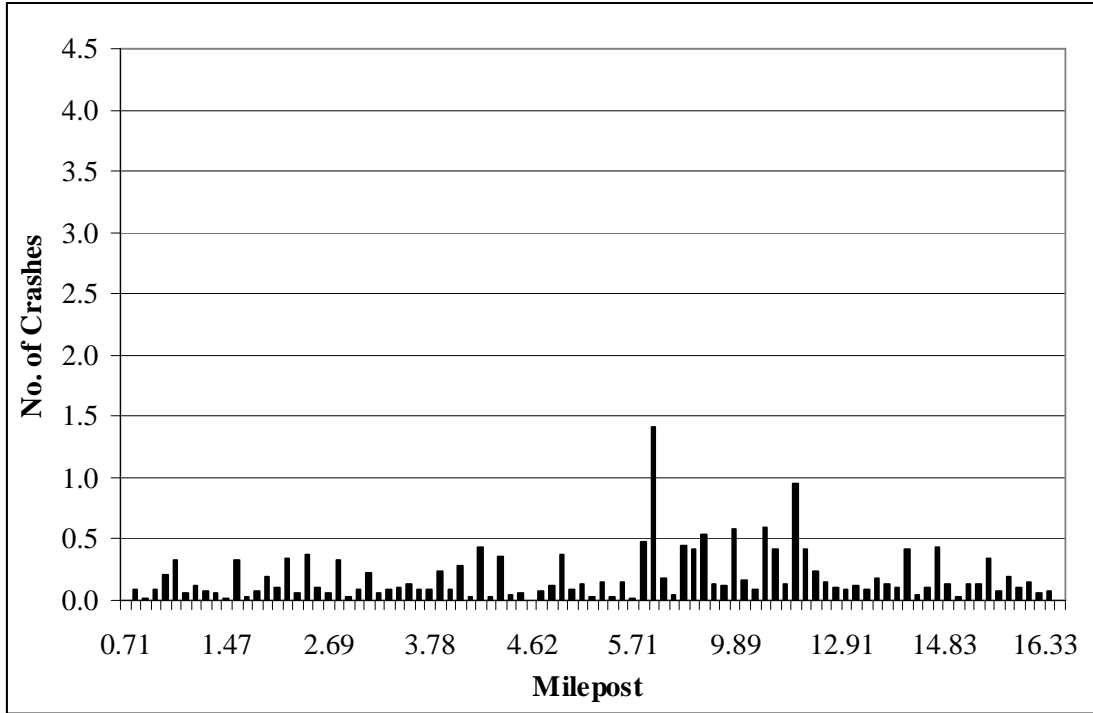


Figure 4-35: Plot of CPM Prediction Results of the SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2006-2008), Analyzed with Crash History

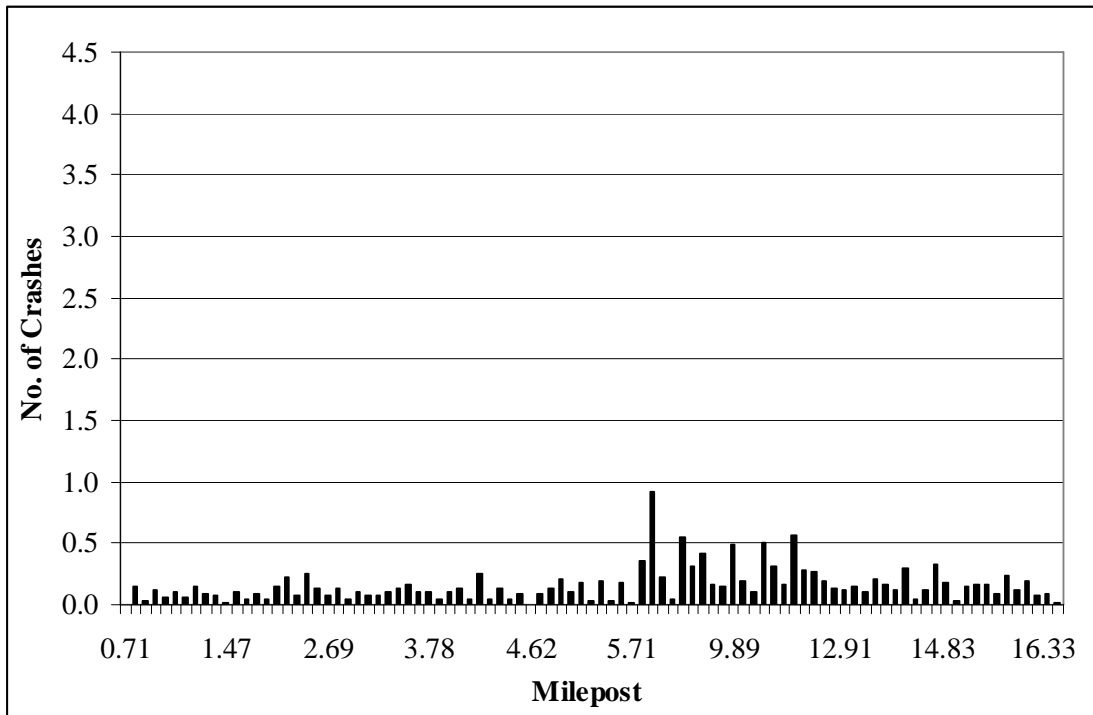


Figure 4-36: Plot of CPM Prediction Results of the SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2006-2008), Analyzed without Crash History

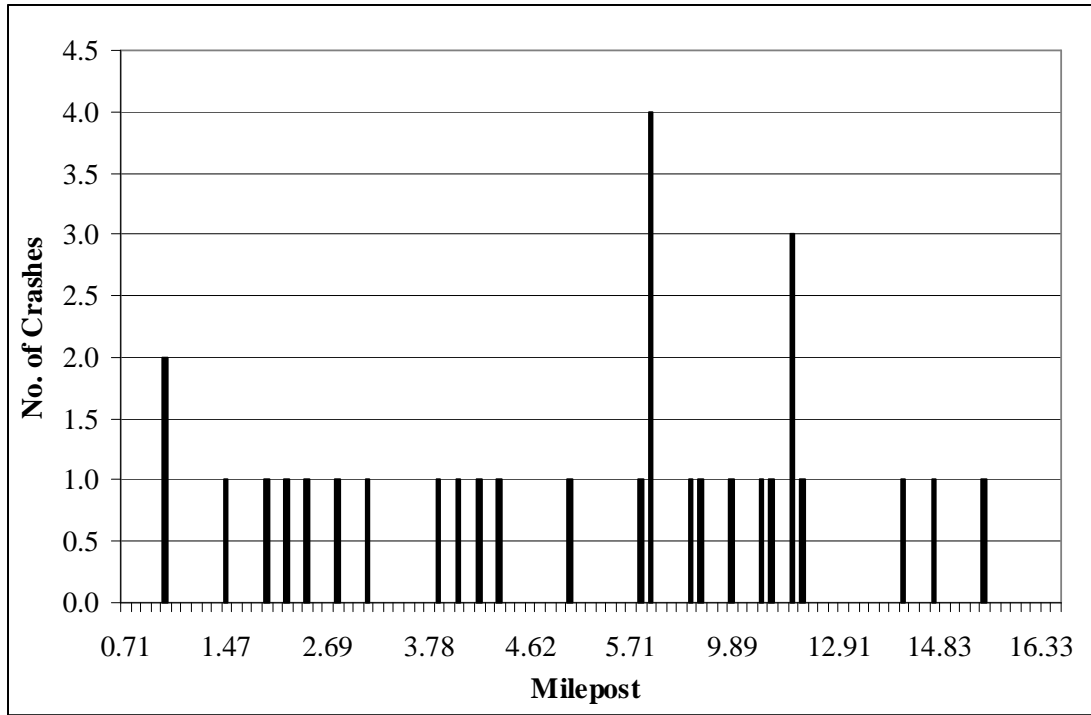


Figure 4-37: Plot of Crash History of SR-150 Study Section (Number of Crashes), MP 0.7-MP 16.4 (2003-2005)

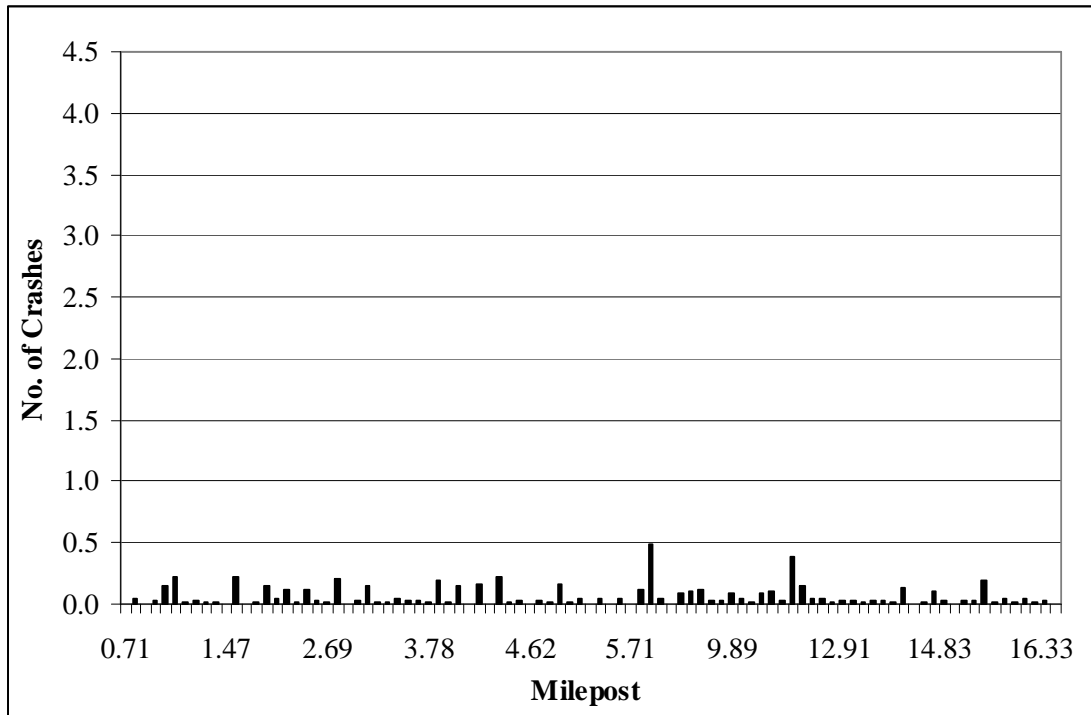


Figure 4-38: Plot of the Difference Between the CPM Results of SR-150 Study Section in Number of Crashes Analyzed With and Without Crash History

A summary statistics of the difference between the CPM results analyzed with and without crash history is shown in Table 4-19. It shows that the mean difference in the number of crashes between the two methods is 0.064, and the standard error of the mean is very small (0.009), resulting in the confidence interval of 0.046 and 0.082 at the 95 percent confidence level. These differences are much smaller than the differences found at the US 40 and US 6 study sections.

Table 4-19: Statistics Summary of the Difference between the CPM Results in Number of Crashes Analyzed With and Without Crash History of SR-150 Study Section

Mean	0.064
Standard Error	0.009
Standard Deviation	0.083
Sample Variance	0.007
Kurtosis	9.379
Skewness	2.659
Range	0.500
Minimum	0.000
Maximum	0.500
Confidence Interval of the Mean (at the 95% Confidence Level)	0.046 – 0.082

Again, the prediction results are presented in crashes/MVMT for comparison. Table 4-20 displays the prediction results, along with the crash history, also in crashes per MVMT. Figure 4-39 and Figure 4-40, show graphically the prediction results with and without crash history and Figure 4-41 shows the crash history itself. Figure 4-42 shows the differences in crashes/MVMT between the CPM results with and without crash history.

Table 4-20: Crash Prediction Results for SR-150 MP 0.7-MP 16.4 (Crashes/MVMT)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with crashes	w/o Crashes	Diff.	Crash History
0.70	0.71	0.01	0.48	0.58	0.10	0.00
0.71	0.78	0.07	0.95	1.40	0.45	0.00

Table 4-20: Crash Prediction Results for SR-150 MP 0.7-MP 16.4 (Crashes/MVMT) (continued)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
0.78	0.81	0.03	0.48	0.58	0.10	0.00
0.81	0.88	0.08	0.77	1.05	0.28	0.00
0.88	0.97	0.08	1.73	0.53	1.20	16.82
0.97	1.05	0.08	2.89	0.95	1.94	0.00
1.05	1.13	0.09	0.45	0.53	0.08	0.00
1.13	1.27	0.13	0.61	0.77	0.16	0.00
1.27	1.38	0.11	0.45	0.53	0.08	0.00
1.38	1.44	0.06	0.66	0.84	0.18	0.00
1.44	1.47	0.03	0.45	0.53	0.08	24.75
1.47	1.54	0.07	3.13	0.97	2.16	0.00
1.54	1.59	0.05	0.45	0.53	0.08	0.00
1.59	1.66	0.07	0.66	0.85	0.19	0.00
1.66	1.72	0.06	2.37	0.54	1.83	12.11
1.72	1.81	0.09	0.77	1.05	0.28	0.00
1.81	2.09	0.27	0.86	0.55	0.31	2.54
2.09	2.17	0.09	0.52	0.63	0.11	0.00
2.18	2.5	0.33	0.77	0.53	0.24	2.12
2.50	2.60	0.09	0.76	1.02	0.26	0.00
2.60	2.69	0.09	0.48	0.57	0.09	0.00
2.69	2.79	0.10	2.19	0.86	1.33	6.68
2.79	2.85	0.05	0.45	0.53	0.08	0.00
2.85	2.94	0.09	0.67	0.87	0.20	0.00
2.94	3.04	0.10	1.59	0.56	1.03	6.98
3.04	3.09	0.06	0.69	0.90	0.21	0.00
3.09	3.23	0.14	0.45	0.54	0.09	0.00
3.23	3.32	0.09	0.80	1.09	0.29	0.00
3.32	3.54	0.22	0.45	0.53	0.08	0.00
3.54	3.64	0.10	0.62	0.78	0.16	0.00
3.64	3.78	0.14	0.45	0.53	0.08	0.00
3.78	3.82	0.04	4.36	0.76	3.60	18.30

Table 4-20: Crash Prediction Results for SR-150 MP 0.7-MP 16.4 (Crashes/MVMT) (continued)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
3.82	3.94	0.12	0.46	0.55	0.09	0.00
3.94	4.08	0.14	1.33	0.61	0.72	4.80
4.08	4.13	0.05	0.45	0.53	0.08	0.00
4.13	4.34	0.21	1.40	0.85	0.55	3.32
4.34	4.40	0.05	0.46	0.55	0.09	0.00
4.40	4.49	0.10	2.55	1.00	1.55	7.10
4.49	4.56	0.06	0.46	0.54	0.08	0.00
4.56	4.61	0.05	0.79	1.08	0.29	0.00
4.61	4.62	0.01	0.45	0.54	0.09	0.00
4.62	4.68	0.07	0.75	1.01	0.26	0.00
4.68	4.86	0.18	0.46	0.54	0.08	0.00
4.86	5.04	0.18	1.41	0.79	0.62	0.00
5.04	5.18	0.13	0.45	0.54	0.09	5.17
5.18	5.32	0.14	0.68	0.89	0.21	0.00
5.32	5.37	0.05	0.46	0.54	0.08	0.00
5.37	5.50	0.13	0.75	1.01	0.26	0.00
5.50	5.55	0.04	0.46	0.54	0.08	0.00
5.55	5.69	0.15	0.68	0.88	0.20	0.00
5.69	5.71	0.01	0.46	0.54	0.08	0.00
5.71	6.08	0.38	0.86	0.64	0.22	1.84
6.08	7.24	1.16	0.85	0.55	0.30	2.40
7.24	7.46	0.21	0.57	0.70	0.13	0.00
7.46	7.51	0.06	0.46	0.54	0.08	0.00
7.51	8.12	0.61	0.51	0.62	0.11	0.00
8.12	8.52	0.39	0.74	0.55	0.19	1.78
8.52	8.94	0.42	0.87	0.68	0.19	1.64
8.94	9.14	0.20	0.47	0.56	0.09	0.00
9.14	9.29	0.15	0.53	0.65	0.12	0.00
9.29	9.89	0.60	0.66	0.57	0.09	1.16
9.89	10.09	0.20	0.57	0.70	0.13	0.00

Table 4-20: Crash Prediction Results for SR-150 MP 0.7-MP 16.4 (Crashes/MVMT) (continued)

Milepost		Length (mi)	Expected Crash Rate (2006-2008) (MVMT)			Crash Rate (2003-2005) (MVMT)
From	To		with Crashes	w/o Crashes	Diff.	Crash History
10.09	10.21	0.13	0.45	0.54	0.09	0.00
10.21	10.73	0.52	0.79	0.66	0.13	1.34
10.73	11.13	0.40	0.72	0.54	0.18	1.74
11.13	11.29	0.16	0.56	0.69	0.13	0.00
11.29	12.00	0.71	0.93	0.55	0.38	2.96
12.00	12.24	0.25	1.19	0.77	0.42	2.82
12.24	12.6	0.35	0.45	0.53	0.08	0.00
12.6	12.74	0.15	0.68	0.88	0.20	0.00
12.74	12.91	0.17	0.46	0.55	0.09	0.00
12.91	13.00	0.09	0.70	0.92	0.22	0.00
13.00	13.19	0.19	0.46	0.55	0.09	0.00
13.19	13.32	0.14	0.47	0.56	0.09	0.00
13.32	13.59	0.26	0.45	0.54	0.09	0.00
13.59	13.73	0.14	0.63	0.81	0.18	0.00
13.73	13.89	0.15	0.46	0.54	0.08	0.00
13.89	14.21	0.32	0.91	0.64	0.27	2.17
14.21	14.27	0.06	0.45	0.53	0.08	0.00
14.27	14.41	0.14	0.50	0.6	0.10	0.00
14.41	14.83	0.43	0.71	0.54	0.17	1.64
14.83	14.99	0.15	0.62	0.79	0.17	0.00
14.99	15.03	0.04	0.46	0.54	0.08	0.00
15.03	15.20	0.18	0.51	0.61	0.10	0.00
15.20	15.41	0.21	0.46	0.54	0.08	0.00
15.41	15.54	0.13	1.83	0.84	0.99	5.30
15.54	15.65	0.10	0.47	0.56	0.09	0.00
15.65	15.92	0.28	0.50	0.61	0.11	0.00
15.92	16.08	0.16	0.46	0.55	0.09	0.00
16.08	16.24	0.16	0.65	0.84	0.19	0.00
16.24	16.33	0.09	0.47	0.56	0.09	0.00
16.33	16.38	0.06	0.85	1.19	0.34	0.00

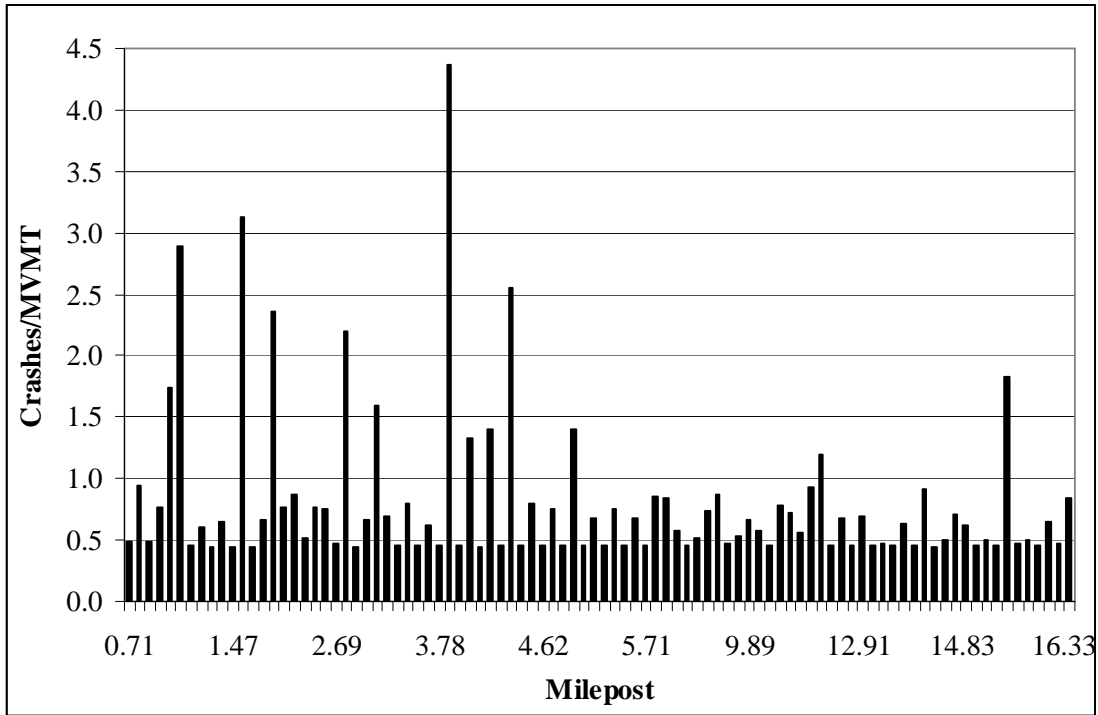


Figure 4-39: Plot of CPM Prediction Results of the SR-150 Study Section (Crashes/MVMT), MP 0.7- MP 16.4 (2006-2008), Analyzed with Crash History

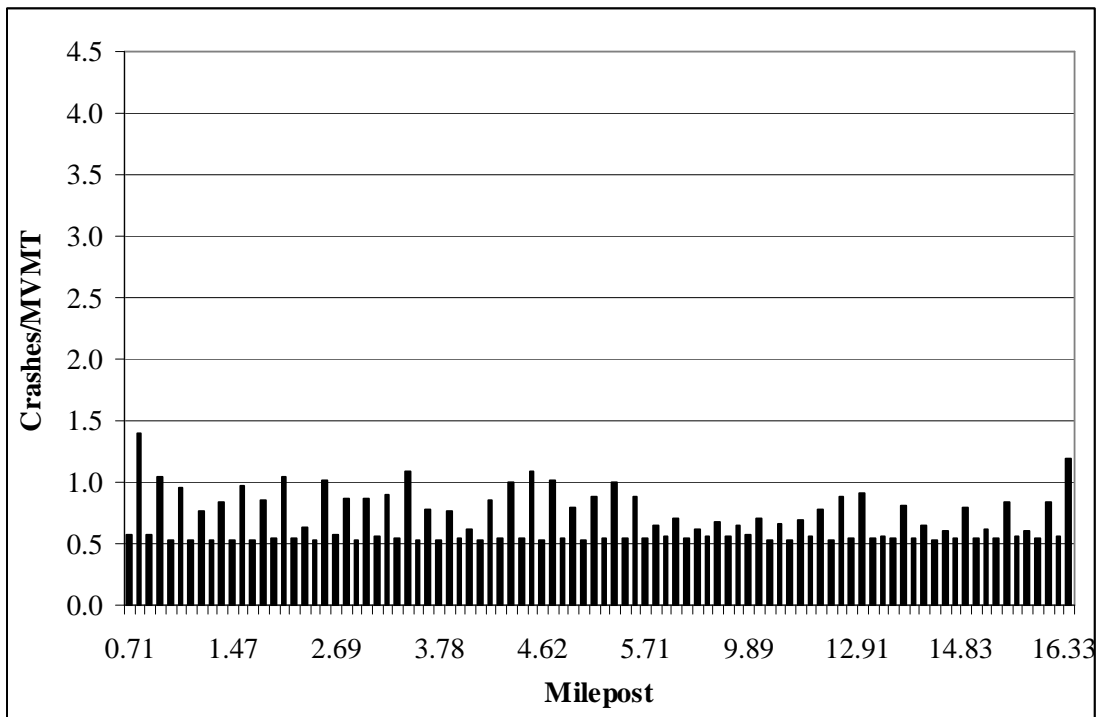


Figure 4-40: Plot of CPM Prediction Results of the SR-150 Study Section (Crashes/MVMT), MP 0.7- MP 16.4 (2006-2008), Analyzed without Crash History

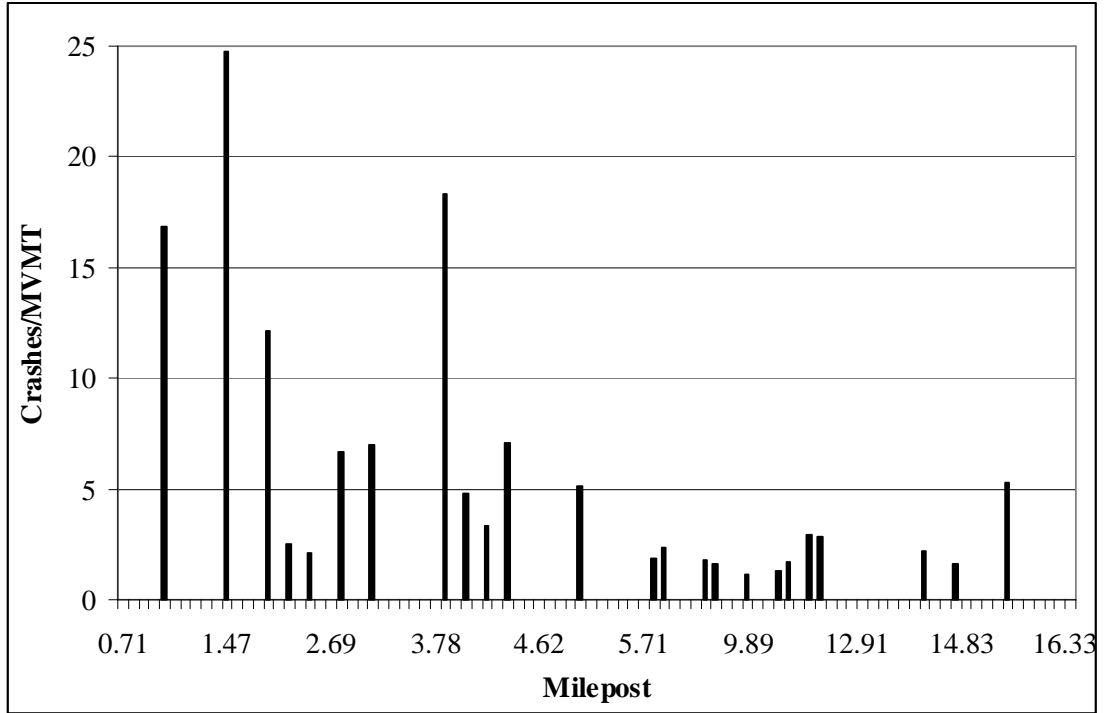


Figure 4-41: Plot of Crash History of SR-150 Study Section (Crashes/MVMT), MP 0.7-MP 16.4 (2003-2005)

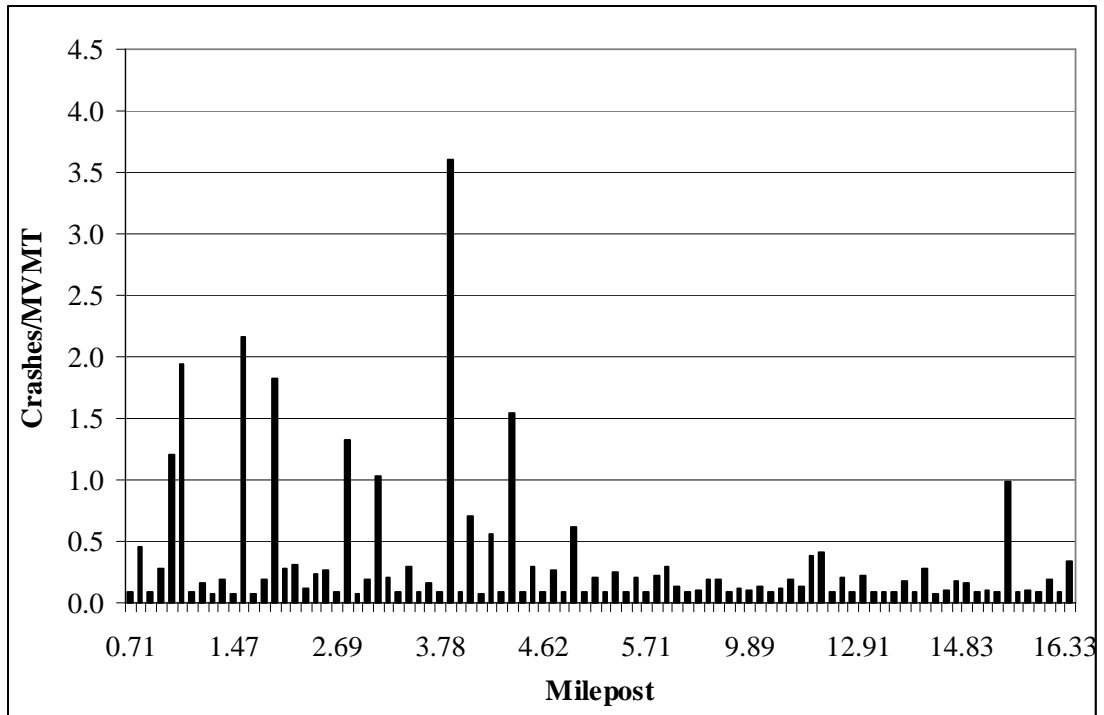


Figure 4-42: Plot of the Difference Between the CPM Results of SR-150 Study Section in Crashes/MVMT Analyzed With and Without Crash History

The statistical summary of the difference between the CPM result analyzed with and without crash history is shown in Table 4-21. It shows that the mean difference in the number of crashes between the two methods is 0.325, and the standard error of the mean is very small (0.056), resulting in the confidence interval of 0.215 and 0.435 at the 95 percent confidence level. These differences are similar to the differences found at the US 40 study section.

Table 4-21: Statistics Summary of the Difference between the CPM Results in Crashes/MVMT Analyzed With and Without Crash History of SR-150 Study Section

Mean	0.325
Standard Error	0.056
Standard Deviation	0.539
Sample Variance	0.290
Kurtosis	16.773
Skewness	3.772
Range	3.520
Minimum	0.080
Maximum	3.600
Confidence Interval of the Mean (at the 95% Confidence Level)	0.215 – 0.435

4.3.4 Analysis of Crash Prediction Results of the SR-150 Study Section

The SR-150 study section, just like the US-40 study section, contains a large number of animal related crashes as shown in Table 4-22. Fifty-seven percent of the crashes from 2003 to 2005 were animal related. However, many of these crashes were domestic-animal collisions, which is unique to this section. Non-animal crashes in this study section were run-off-the-road and multi-vehicle collisions, which indicate that the alignments may be potentially problematic.

The high percentage of animal-related crashes appears to have affected the crash prediction results. The crash prediction results in number of crashes, shown in Figure 4-35, Figure 4-36, and Figure 4-37, display similar trends, whereas the prediction results in crash rate (crashes/MVMT), shown in Figure 4-39, Figure 4-40, and Figure 4-41, do not have the same level of similarity found in the prediction results in number of crashes. Similar to the US-40 study section, when the crash history contains many animal-related

crashes, the analysis results may be skewed. In the SR-150 study section, the crashes distributed evenly between the two directions as shown in Table 4-22.

Table 4-22: Crash History Summary of the US-150 Study Section, MP 0.7-MP 16.4 (2003-2005)

Year	Milepost	Direction	Severity	Accident Type
2003	11.00	E	No Injury	MV-Animal (Domestic)
2004	14.64	E	No Injury	MV-Animal (Domestic)
2003	1.99	E	Possible Injury	MV-Animal(Wild)
2004	5.04	E	No Injury	MV-Animal(Wild)
2004	7.01	E	No Injury	MV-Animal(Wild)
2004	11.4	E	No Injury	MV-Animal(Wild)
2003	6.22	E	No Injury	MV-MV
2003	14.00	E	No Injury	MV-MV
2004	2.29	E	No Injury	MV-MV
2004	6.32	E	No Injury	Ran Off Roadway-Right
2005	0.90	E	Broken bones or bleeding wounds	Ran Off Roadway-Right
2005	6.03	E	Bruises And Abrasions	Ran Off Roadway-Right
2003	6.62	W	No Injury	MV-Animal (Domestic)
2004	9.62	W	No Injury	MV-Animal (Domestic)
2005	4.21	W	No Injury	MV-Animal (Domestic)
2005	8.61	W	No Injury	MV-Animal (Domestic)
2005	10.32	W	No Injury	MV-Animal (Domestic)
2003	11.63	W	No Injury	MV-Animal(Wild)
2003	12.03	W	No Injury	MV-Animal(Wild)
2004	4.41	W	No Injury	MV-Animal(Wild)
2004	8.50	W	No Injury	MV-Animal(Wild)
2004	11.65	W	No Injury	MV-Animal(Wild)
2005	3.80	W	No Injury	MV-Animal(Wild)
2005	1.47	W	No Injury	MV-MV
2005	4.07	W	No Injury	MV-MV
2004	1.69	W	No Injury	Ran Off Roadway-Left

**Table 4-22: Crash History Summary of the US-150 Study Section,
MP 0.7-MP 16.4 (2003-2005) (continued)**

Year	Milepost	Direction	Severity	Accident Type
2003	3.00	W	Bruises And Abrasions	Ran Off Roadway-Right
2005	0.97	W	Broken bones or bleeding wounds	Ran Off Roadway-Right
2005	2.70	W	Bruises And Abrasions	Ran Off Roadway-Right
2005	15.44	W	Possible Injury	Ran Off Roadway-Right

4.4 Chapter Summary

In this chapter the results of the evaluation of the CPM were presented using three two-lane rural highway study sections selected by the TAC members. The evaluation provided some insights in the capability of the CPM. The CPM comes with various input assistance tools and some of the input data come with default values. When site specific data required for the module are not available, the CPM provides default values. The analysis was performed with the goal of determining if the CPM could be used as a tool for safety audits of two-lane rural highways. The findings from the analysis of the three study sections are summarized.

From the analysis of the US-40 study section, from MP 35 to MP 45, it was learned that the content of the input data can greatly affect the quality of the prediction outputs. In the case of the US-40 study section, animal-related collisions comprised the majority of the crashes (about 60 percent) and consequently this affected the crash prediction outputs. The default prediction model considers animal-related crashes to be about 30 percent of the total number of crashes. The US-6 study section, from MP 22 to MP 28, had only one animal-related crash; hence the analysis results began to show the capability of the CPM. With the data from this study section the CPM produced reasonably accurate crash prediction values and thus manifested the potential for CPM in assisting transportation engineers in identifying crash prone segments within the study section. As for the SR-150 study section, just like the US-40 study section, the large number of animal-related crashes skewed the outcome of the analysis.

From these findings, it can be concluded that the CPM can be used in safety audits of two-lane rural highways in identifying potential “hot spots” that require special attention as a function of crash numbers, with some caution when using crash rates. In all cases, the general trends of predicted crash occurrences along the study sections with and without showed some similarity. The statistics of the difference in number of crashes with and without crash history turned out to be small, thus indicating the possibility of using the CPM without crash history to predict the number of crashes for alternative alignments.

What is important is that users need to make sure that appropriate surrogate alignments reflecting the existing alignments at reasonable accuracy are used and be able to interpret the analysis results carefully using their knowledge in highway design and engineering experience.

5 Application of IRM to Selected Intersections

As mentioned in Section 2.1.5, the IRM is a separate module that requires a different set of data and an independent file set to run. This chapter discusses the findings obtained from the application of IRM to two selected intersections on two-lane rural highways that were recommended by the TAC members of the study.

5.1 Need for IRM

Generally speaking, UDOT does not have many four-leg rural highway intersections consisting of two two-lane rural highways that are suitable for analysis by the IRM of IHSDM. There are, however, many three-leg T-intersections consisting of two two-lane rural highways. Although the analysis required four-leg intersections to identify the applicability of IRM to safety audits, three-leg intersections were used for this analysis.

5.2 Application of IRM to the Intersections of US-6, SR-174, and SR-136

After discussing with the TAC members of the study about this portion of the study, two intersections were chosen to apply the IRM. Unlike the study sections used for the CPM evaluation which were selected because of their high crash rates, these two intersections were chosen for their ideal characteristics required for the analysis.

The two intersections are located in central Utah, about 50 miles west of the City of Elberta. Figure 5-1 shows the location of the two intersections (UDOT 2008) and Figure 5-2 shows a schematic drawing of the relationship between the two intersections.

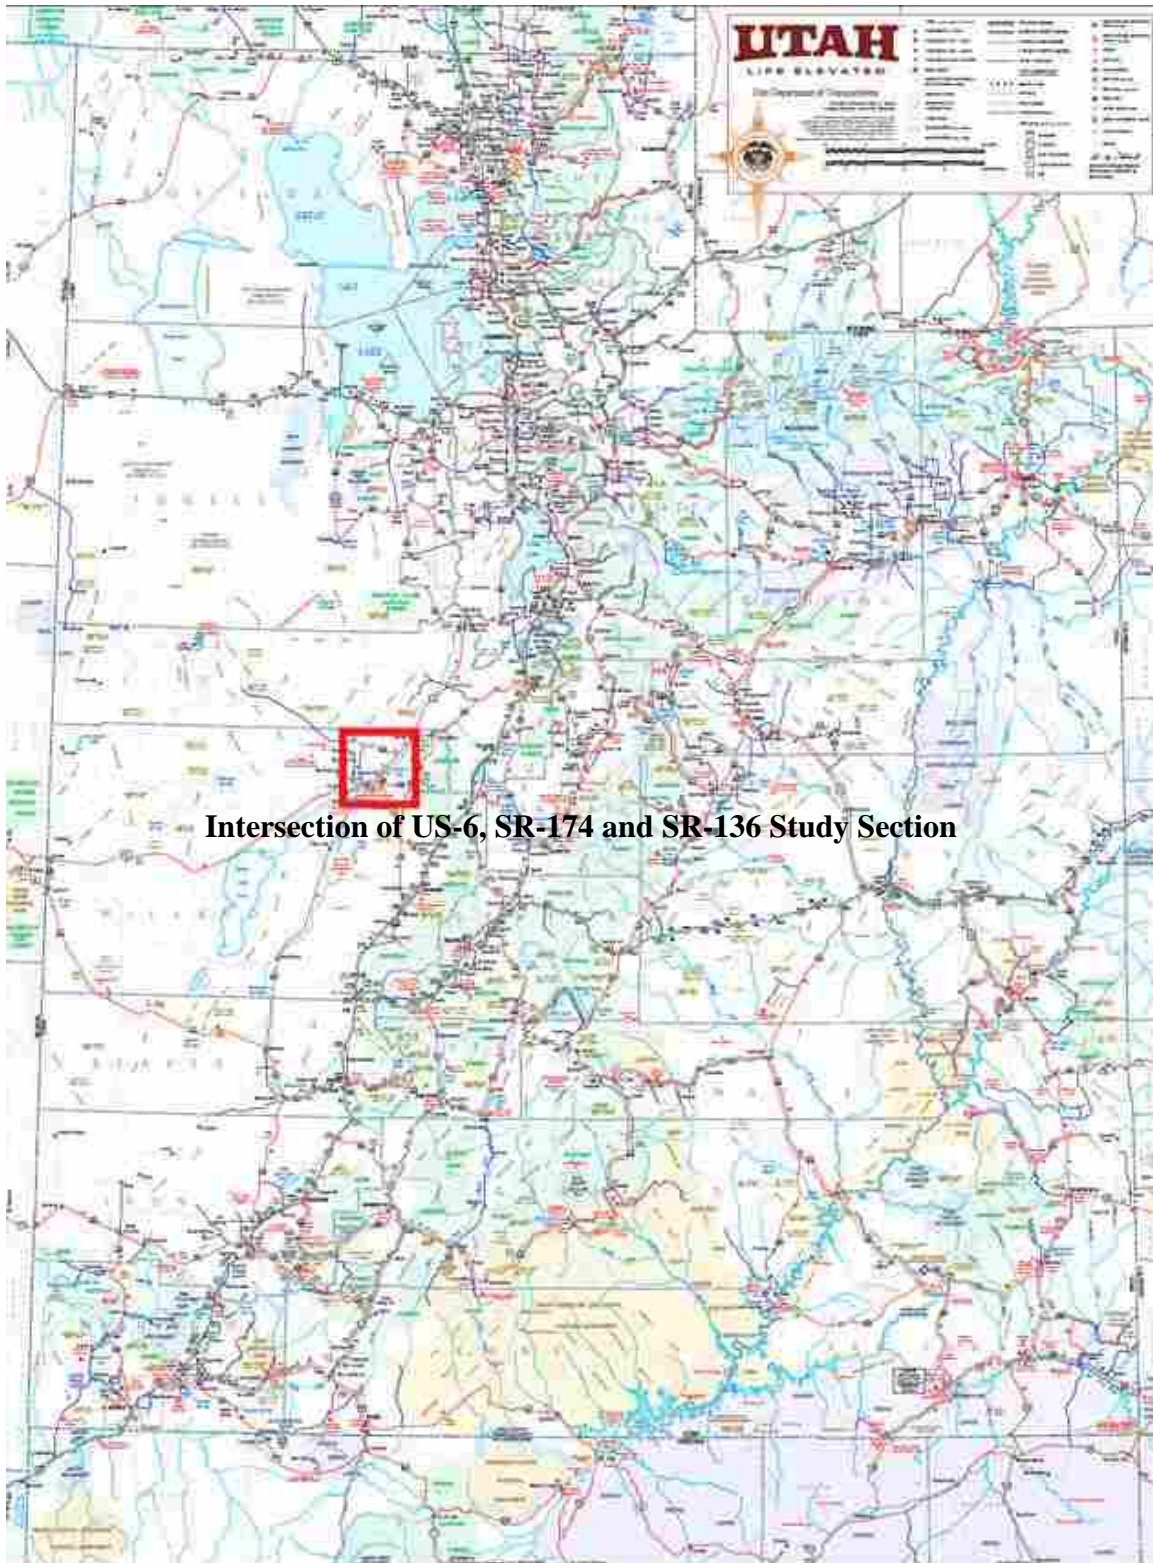


Figure 5-1: Location of the Intersections of US-6, SR-174, and SR-136 (UDOT 2008)

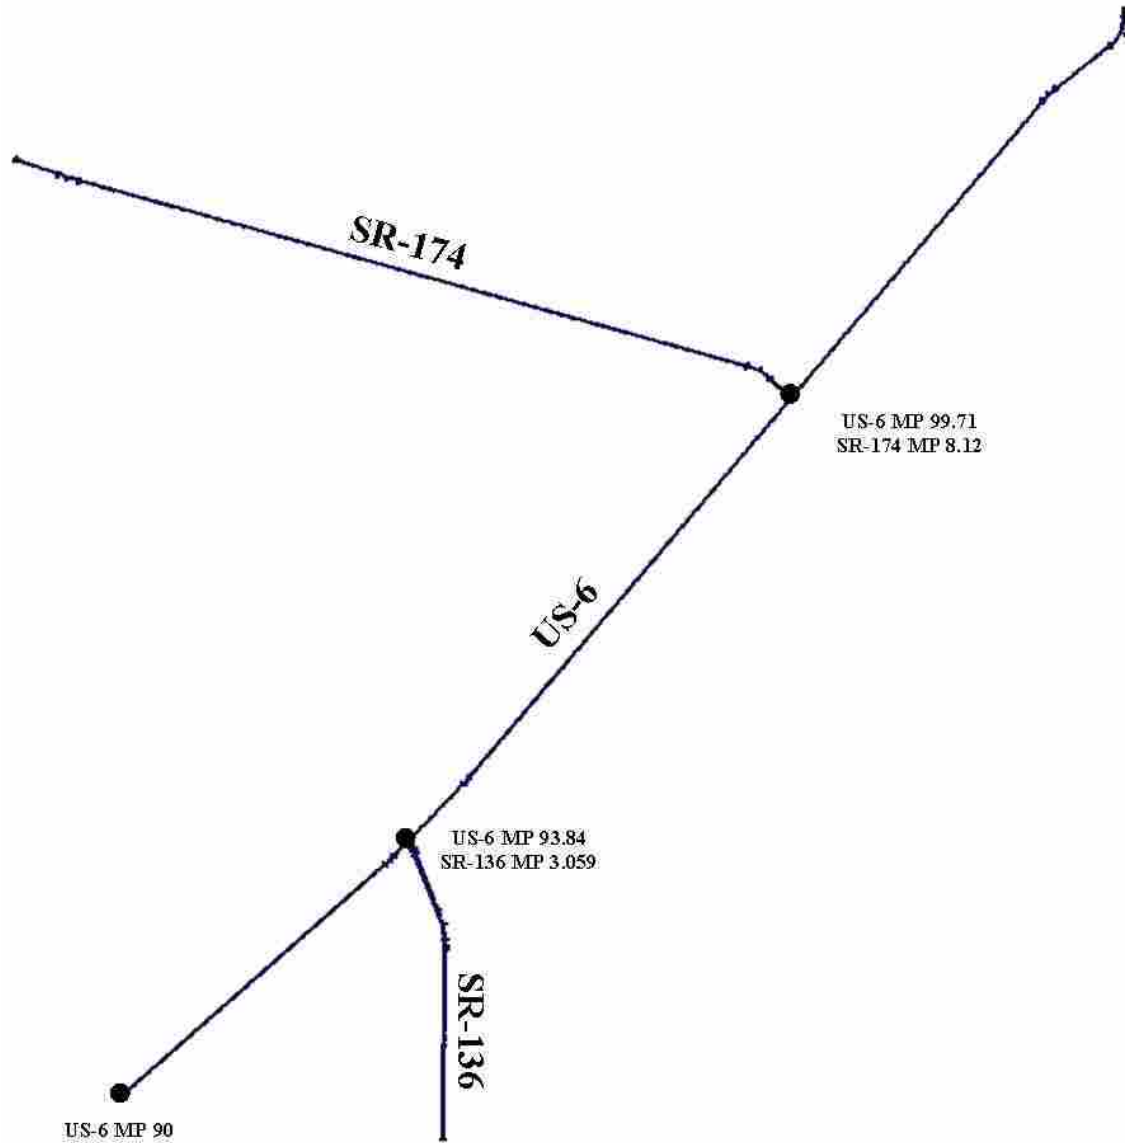


Figure 5-2: Plot of the Intersections of US-6, SR-174, and SR-136

5.2.1 Current Conditions of the Intersections

A trip was made to investigate the conditions of the intersections. Figure 5-3 shows two photos obtained from the Roadview website (UDOT 2007a) and Figure 5-4 shows two photos taken during the author’s field visit to the site in December 2007. These two figures were prepared for comparison purposes.



(a) Intersection of US-6 and SR-174



(b) Intersection of US-6 and SR-136

Figure 5-3: Photos of the Intersections, during summer 2005 (UDOT 2007a)



(a) Intersection of US-6 and SR-136



(b) Intersection of US-6 and SR-174

Figure 5-4: Photos of the Intersections, during winter 2007 (Taken by Kaitlin Chuo)

From these photos it can be seen that the quality of the pavement appears to be declining. Apart from this decline in their pavement quality, the general conditions of the intersections appeared relatively good.

5.2.2 Alignments of US-6, SR-174, and SR-136

The biggest difference in data entry between IRM and CPM is that IRM requires multiple highway alignments be entered separately and they are connected with the IHSDM function “New Intersection” to form intersections. IRM users only need to provide the stations of the roads where they cross the other road(s) to build an intersection. Table 5-1 presents the surrogate centerline horizontal alignments of all three road sections and Table 5-2 gives the vertical alignments. These alignments were prepared in the manners presented in Appendix and in the same manner that the centerline alignments were created for the CPM analysis.

Table 5-1: Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1

Segment	Milepost		Radius
	From	To	
US-6			
Tangent	93.57	97.09	
Simple Curve	97.09	97.22	
Tangent	97.22	98.21	8000
Simple Curve	98.21	98.30	
Tangent	98.30	107.16	7000
Simple Curve	107.16	107.35	
Tangent	107.35	108.03	5000
Simple Curve	108.03	108.36	
Tangent	108.36	108.55	2000
SR-174			
Tangent	0.00	0.45	
Simple Curve	0.45	0.67	20000
Tangent	0.67	7.56	
Simple Curve	7.56	7.82	3000
Tangent	7.82	8.10	
SR-136			
Tangent	0.00	0.01	
Simple Curve	0.01	0.01	400
Tangent	0.01	0.03	
Simple Curve	0.03	0.05	1500
Tangent	0.05	0.05	
Simple Curve	0.05	0.09	1000
Tangent	0.09	0.10	
Simple Curve	0.10	0.14	1300
Tangent	0.14	0.74	
Simple Curve	0.74	1.05	5500
Tangent	1.05	1.12	
Simple Curve	1.12	1.13	1000
Tangent	1.13	3.06	

Table 5-2: Vertical Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1

VPI Station	Back Grade	Back Length	Forward Grade	Forward Length
US-6				
93.73	-0.20	125	2.17	125
93.94	2.17	100	0.55	100
94.05	0.55	200	1.59	200
94.22	1.59	100	0.82	100
94.37	0.82	75	0.00	75
94.42	0.00	50	0.31	50
94.46	0.31	50	1.34	50
94.74	1.34	200	-0.15	200
94.89	-0.15	150	1.20	150
94.98	1.20	125	-0.12	125
95.05	-0.12	75	0.71	75
95.12	0.71	75	0.37	75
95.15	0.37	50	1.30	50
95.23	1.30	100	1.59	100
95.29	1.59	150	0.07	150
95.35	0.07	50	-0.49	50
95.38	-0.49	50	-0.11	50
95.43	-0.11	25	-0.65	25
95.46	-0.65	100	0.25	100
95.51	0.25	25	0.69	25
95.58	0.69	50	1.18	50
95.69	1.18	75	0.36	75
95.73	0.36	25	0.59	25
95.98	0.59	500	0.05	500
96.19	0.05	250	0.97	250
96.58	0.97	350	-0.51	350
96.68	-0.51	175	0.02	175
97.20	0.02	250	-4.05	250
97.57	-4.05	100	-2.89	100
97.78	-2.89	450	3.37	450
97.92	3.37	140	6.17	140
98.12	6.17	400	0.28	400
98.29	0.28	100	0.72	100
98.38	0.72	50	-0.10	50
98.54	-0.10	150	0.82	150
98.68	0.82	100	2.76	100
98.82	2.76	500	-0.22	500
99.02	-0.22	50	0.70	50
99.10	0.70	100	0.11	100

Table 5-2: Vertical Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1 (continued)

VPI Station	Back Grade	Back Length	Forward Grade	Forward Length
99.32	0.11	175	-1.29	175
99.47	-1.29	100	-0.24	100
99.56	-0.24	175	-2.99	175
99.69	-2.99	150	0.28	150
99.82	0.28	150	2.05	150
99.96	2.05	200	0.16	200
100.24	0.16	100	1.24	100
100.42	1.24	150	0.15	150
101.18	0.15	150	-0.77	150
101.40	-0.77	600	0.45	600
101.85	0.45	350	-0.10	350
102.14	-0.10	250	0.29	250
102.47	0.29	350	0.12	350
102.73	0.12	150	0.00	150
102.92	0.00	45	0.25	45
103.18	0.25	150	-0.03	150
103.69	-0.03	750	0.14	750
104.17	0.14	200	-0.17	200
104.33	-0.17	500	0.05	500
105.87	0.05	150	-0.49	150
106.30	-0.4	200	-1.61	200
106.50	-1.61	400	0.35	400
106.96	0.35	250	0.15	250
107.24	0.15	150	0.79	150
107.38	0.79	100	0.00	100
107.45	0.00	50	1.10	50
107.57	1.10	150	-0.65	150
107.66	-0.65	200	0.00	200
107.77	0.00	50	0.81	50
107.84	0.81	50	0.22	50
107.95	0.22	100	0.57	100
108.00	0.57	50	-0.39	50
108.04	-0.39	75	0.55	75
108.08	0.55	100	0.07	100
108.29	0.07	25	-0.77	25
108.35	-0.77	75	0.41	75
108.38	0.41	25	-0.60	25
108.40	-0.60	40	0.08	40
SR-174				
0.11	0.16	200	-0.06	200

Table 5-2: Vertical Alignments of US-6 MP 90-MP 108, SR-174 MP 0-MP 8.1, and SR-136 MP 0-MP 3.1 (continued)

VPI Station	Back Grade	Back Length	Forward Grade	Forward Length
0.29	-0.06	25	0.06	25
0.72	0.06	550	1.26	550
0.97	1.26	500	2.95	500
1.28	2.95	1000	0.13	1000
1.99	0.13	500	0.34	500
2.34	0.34	250	-0.48	250
2.58	-0.48	1000	0.65	1000
2.92	0.65	750	-0.29	750
3.38	-0.29	600	0.40	600
3.78	0.40	500	-0.09	500
4.40	-0.09	1000	0.63	1000
5.02	0.63	1000	-0.80	1000
5.38	-0.80	850	0.87	850
5.71	0.87	400	0.09	400
5.88	0.09	450	0.57	450
6.14	0.57	250	0.27	250
6.52	0.27	450	0.06	450
7.07	0.06	500	-0.15	500
7.37	-0.15	500	0.33	500
7.60	0.33	50	-0.56	50
7.64	-0.56	50	0.22	50
7.83	0.22	100	-0.69	100
7.90	-0.69	100	-0.02	100
SR-136				
0.06	0.39	125	1.86	125
0.12	1.86	50	2.65	50
0.28	2.65	50	2.00	50
0.49	2.00	900	-1.03	900
0.84	-1.03	450	0.64	450
1.00	0.64	200	-0.08	200
1.12	-0.08	50	-0.90	50
1.27	-0.90	450	1.24	450
1.54	1.24	475	-1.19	475
1.66	-1.19	150	-2.25	150
1.83	-2.25	400	0.09	400
2.03	0.09	150	-0.39	150
2.25	-0.39	400	0.55	400
2.59	0.55	1150	-1.41	1150
2.91	-1.41	400	-0.41	400

5.2.3 Analysis of the IRM Results

In the IRM, the output results are in a different format compared to the outputs of the CPM. IRM’s goal is to “emulate the knowledge of a human expert” (FHWA 2006).

Instead of giving predicted numbers of crashes, IRM gives a “Diagnostic Summary.” The diagnostic summary has two components: policy review (not available in the version of IHSDM used for the study); and diagnostic review, the focus of the analysis in this study. When IRM is run, four elements of the intersection are checked: corner radius, turn lane design, intersection angle, and intersection sight triangle. In the IRM diagnostic summary, Level 1 refers to the concerns that could “indicate a potential safety issue” and Level 2 refers to the concerns that could “indicate potential for significant design improvement” (FHWA 2006). Table 5-3 shows the diagnostic summary of the intersection at US-6 and SR-174 and Table 5-4 shows the diagnostic summary of the intersection at US-6 and SR-136.

Table 5-3: Diagnostic Summary of the Intersection at US-6 and SR-174

Scope	Status	Concern	Feature			Comment	Treatment	
			Category	Road	Threshold		Design	Mitigation
Intersection concern	Not a concern	Large intersection pavement area						
Leg #1 - NE US-6	Not a concern	Approach alignment differs						
Leg #2 - SW US-6	Not a concern	Insufficient SSD on vertical curve				Crest vertical curve		
		Insufficient DSD						
		Approach alignment differs						
Leg #3 - NW US-174	Level 1	Insufficient ISD to right (Case B1)	ISD (vertical)	403.54 feet	647.17 feet	The required time for the maneuver used in the ISD calculations are for passenger cars only ; crest vertical curve	1. Remove roadside obstacles within sight triangle. 2. Signalize intersection. 3. Convert to all-way STOP. 4. Post advisory speed on major road. 5. Review speed limit on major road. 6. Install	
	Not a concern	Insufficient ISD to left (Case B2)				The required time for the maneuver used in the ISD calculations are for passenger cars only		
		Approach alignment differs						

Table 5-4: Diagnostic Summary of the Intersection at US-6 and SR-136

Scope	Status	Concern	Feature			Comment	Treatment		
			Category	Road	Threshold		Design Improvement	Mitigation Measures	
Intersection concern	No policy					Acceptable approach volume for speed 65 miles/hour, opposing volume 1,025 vehicles/hour, left turn percent 17.65 percent			
	Not a concern	Large intersection pavement area							
Leg #1 - NE US-6	Not a concern	Insufficient ISD for left turn from major road (Case F)				The required time for the maneuver used in the ISD calculations are for passenger cars only			
		Insufficient SSD on horizontal curve				Horizontal curve			
		Insufficient SSD on vertical curve				Crest vertical curve			
		Insufficient DSD on horizontal curve				Horizontal curve			
		Insufficient DSD on vertical curve				Crest vertical curve			
		Warranted left turn lane is not present							
		Loss of control potential due to Approach alignment differs between opposing					Horizontal curve		
Leg #2 - SE US-136	Level 1	Insufficient ISD to right (Case B1)	ISD (vertical)	32.81 feet	647.17 feet	The required time for the maneuver used in the ISD calculations are for passenger cars only ; crest vertical curve	1. Remove roadside obstacles within sight triangle. 2. Close approach. 3. Relocate approach. 4. Make leg one-way away from intersection. 5. Lengthen vertical curve.	1. Remove roadside obstacles within sight triangle. 2. Signalize intersection. 3. Convert to all-way STOP. 4. Post advisory speed on major road. 5. Review speed limit on major road. 6. Install	
	No data					Could not calculate actual horizontal stopping sight distance			
						Could not calculate actual stopping sight distance			
						Actual horizontal sight distance unavailable			
	Not a concern	Insufficient ISD to left (Case B2)					The required time for the maneuver used in the ISD calculations are for passenger cars only		
			Insufficient SSD on horizontal curve				Horizontal curve		
			Insufficient DSD on horizontal curve						
Insufficient visibility to stop sign		SD (horizontal)		659.86 feet					
Increased crossing distance		Skewed angle	87.87053 degrees	50.00000 degrees					
	Approach alignment differs between opposing approaches								

Table 5-4: Diagnostic Summary of the Intersection at US-6 and SR-136 (continued)

Scope	Status	Concern	Feature			Comment	Treatment	
			Category	Road	Threshold		Design Improvement	Mitigation Measures
		Uneven, discontinuous minor-road profile through intersection						
Leg #3 - SW US-6	Level 1	Warranted right turn lane is not present		181 vehicles/hour	40 vehicles/hour		1. Provide right-turn lane. 2. Provide channelized right-turn roadway. 3. Provide right-turn acceleration lane.	1. Restripe or reallocate approach lane configuration. 2. Install advance warning sign.
	Not a concern	Approach alignment differs between opposing approaches						

In Table 5-3 and Table 5-4, the terms ISD, SSD, and DSD are defined as intersection sight distance, stopping sight distance, and decision sight distance. It is advised that the reader refer to *A Policy on Geometric Design of Highways and Streets* by AASHTO for detailed definitions and equations for these terms (AASHTO 2004).

As these two tables show, the software gives diagnostic (concern), comments, design improvement, and mitigation measures for the evaluated intersections based on the data entered by the user. For the intersection of US-6 and SR-174, the IRM results showed that the northwest (NW) leg had some safety concerns and suggested a few steps for improvements. The other two legs did not have any concerns.

As for the other intersection, at US-6 and SR-136, the southeast (SE) and southwest (SW) legs were evaluated as potentially problematic and mitigation measures were recommended accordingly. Also, the northeast (NE) leg has eight concerns about various issues, although no suggestion for improvements was given.

These comments and suggestions are useful for highway design engineers and traffic safety engineers and provide them with some ideas of the safety conditions of the study sites prior to visiting the sites.

Again, the user needs to remember that none of the modules in IHSDM are meant to substitute professional, engineering judgment. All the outputs and results from the IHSDM modules are to be interpreted and used with caution.

5.3 Chapter Summary

This chapter presented the results of the analysis of two intersections of two-way rural highways on US-6. In its output reports, the IRM provides comments and suggested solutions to the legs of the intersections and the intersection itself that may have potential concerns. In the two specific cases presented here, the intersections were not experiencing high crash rates or driver confusions due to the roadway designs; therefore, it is difficult to determine if the given recommendations are valid and practical. The items diagnosed by the IRM need to be verified by a field visit. Nevertheless, these comments and suggested treatments given in the diagnostic summary of the IRM can be used as the guidelines for identifying possible improvements.

6 Conclusions and Recommendation

Two-lane rural highways comprise 77 percent of the nation's highway systems and they account for 44 percent of the nation's fatal crashes (FHWA 2006). Keeping two-way rural highways safe is an important task of many state departments of transportation. As one method to proactively identify potential problems on highway sections and intersections, roadway safety audits are conducted. However, sending several experts to the study sites without clear ideas is simply costly and time consuming. Hence, a method that will help transportation engineers set a clear goal for inspection prior to field inspections has been sought.

FHWA has worked on the development of IHSDM in an attempt to help highway engineers design safe two-lane highways and to help safety engineers efficiently analyze safety impacts of alternative designs (FHWA 2006). IHSDM is a suite of software developed by FHWA for monitoring and analyzing two-lane rural highways in the United States. IHSDM consists of six modules: PRM, CPM, DCM, TAM, IRM, and DVM, with DVM being still under development at present (see Chapter 2 for the descriptions of these six modules of IHSDM).

As IHSDM is a fairly "young" program a limited amount of research has been conducted to evaluate its practicability and reliability. This study was conducted to determine if IHSDM can be adopted into the engineering decision making process during safety audits of two-way rural highways in Utah. Among the six modules, two modules, CPM and IRM, were chosen for evaluation because of their applicability to safety audits.

Both CPM and IRM require, at minimum, horizontal and vertical alignments. However, plans of two-way rural highways were practically nonexistent because they were constructed many years ago. Furthermore, reconstruction and/or rehabilitation works that might have taken place to these highways; hence, finding their alignments was

practically impossible. Hence, a new method was developed for this study to create surrogate alignments using GPS data collected by UDOT (see Appendix). This method helps the engineers to create surrogate alignments of any two-way rural highways under study as long as GPS data for each direction of the highway sections are available. This new method for creating surrogate alignments is one notable contribution of this study for expanding the use of IHSDM to safety audits of two-way rural highways.

In the following subsections conclusions based on the findings from the evaluation of the CPM and IRM are presented and recommendations for applying these modules to safety audits of two-way rural highways are presented together with recommended future research topics on IHSDM.

6.1 Conclusions

Two modules of IHSDM, CPM and IRM, were evaluated in this study because of their applicability to safety audits of two-lane rural highways in Utah. Three sections of two-lane rural highways were selected by the TAC members for the CPM evaluation, due to their undesirable crash histories. Two adjacent intersections on US-6 were then chosen for the IRM evaluation.

As for CPM, the outputs for the three study sections suggest that the CPM has the ability to duplicate similar trends in number of crashes, if the quality of the input data is maintained. Crashes per MVMT of each segment reflect the characteristics of the segments in the study section. Hence, similar crash rates are expected for tangent segments and different crash rates are determined for curve segments depending on their radii. A large number of crashes involving wild animals negatively affect the ability of the CPM as demonstrated by the US-40. However, the analysis of the SR-150 study section showed that the CPM was able to produce reasonably reliable outputs despite a large number of wild or domestic animal related crashes. As for the IRM, the outputs of the module include suggestions and recommendations to improve the intersections and they require engineering judgment in interpreting them and in selecting improvements presented.

Based on the comparison of the trends in the number of crashes with and without crash history along the highway segments of the three study sections and the mean difference between the number of crashes with and without crash history, the CPM is found to be a capable and useful tool for the highway and safety engineers as they prepare for safety audits of two-way rural highways. The finding on the differences in number of crashes with and without crash history is important. This means the CPM can be used to estimate crash occurrences for alternative improvements to the existing sections. The IRM, on the other hand, can function like a knowledge-based safety inspection assistant by providing diagnostic statements and offering potential crash mitigation measures. As mentioned in Chapter 4 and Chapter 5, however, interpreting the outputs from these modules of IHSDM requires knowledge and experience in highway design and familiarity with *A Policy on Geometric Design of Highway and Streets* by AASHTO (2004).

6.2 Recommendations

The Users' Manual of IHSDM states, "IHSDM is intended as a supplementary tool to augment the design process...This tool is NOT a substitute for engineering judgment..." (FHWA 2006). IHSDM is not to be used as a replacement to engineering experience and decision-making. This notion is especially important when using the CPM, where future crash rates are predicted for the future; the crash rates predicted by the CPM should never be taken as specific numbers of crashes that may take place but they should be taken as indicators of trends in crash occurrence. Also, since the outputs of the IRM are suggestions and recommendations produced by the equations and pre-defined procedures in the program, they need to be used with caution and should not be accepted blindly. Study sites must be visited and their suggestions and recommendations be evaluated for their appropriateness.

Traffic safety engineers at UDOT can incorporate the CPM and IRM modules of IHSDM into their safety audit routine. Running these modules will help them identify potential "hot spots" that require special attention before they send a group of experts to the field. This will help them use their time and resources efficiently and effectively.

Because IHSDM can be downloaded free of charge, the cost for the UDOT engineers to utilize the software is practically none. The software is self-explanatory and relatively easy to learn; however, receiving training on the software provided by FHWA will certainly help the engineer become confident in the use of the software. Since only the CPM and IRM modules of IHSDM were evaluated in this study, the capability and usefulness of the other modules are yet unknown. It is recommended that UDOT engineers explore all six modules of IHSDM to fully appreciate the power of the software and identify how this software can be used to improve the conditions of two-way rural highways.

As for the features of the CPM, the crash prediction models implicitly include the effect of animal-related crashes. There is no feature to adjust the situation for highway sections with over-represented occurrences of animal-related crashes. Therefore, it is recommended to investigate if animal-related crashes can be excluded in order to analyze the highway sections purely from the geometric conditions of the highways.

IHSDM allows the users to calibrate prediction models in the CPM to better reflect the local conditions. This issue was outside the scope of this study; however, such calibration efforts may increase the module's crash prediction capability. It is recommended to conduct a study to determine the values of the calibration factor included in the crash prediction model to make the CPM more responsive to the drivers on Utah's two-way rural highways.

References

- American Association of State Highway and Transportation Officials (AASHTO). (2004). *A Policy on Geometric Design of Highways and Streets 2004*. Washington, D.C.
- Dimaiuta, M. Program Manager, Geometric Design Laboratory, A/E Group, Inc., c/o FHWA, 6300 Georgetown Pike, MS HSR-20, McLean, VA 22101. Personal interview. (December 19, 2006)
- Federal Highway Administration (FHWA) (2006). *Interactive Highway Safety Design Model*. U.S. Department of Transportation, Washington, DC. <<http://www.tfrc.gov/safety/ihsdm/ihsdm.htm>> (September 16, 2006)
- Federal Highway Administration (FHWA) (2008). *Road Safety Audit*, FHWA Safety. U.S. Department of Transportation, Washington, DC. <<http://safety.fhwa.dot.gov/rsa/index.htm>> (February 19, 2008)
- Kinney, R. (2005). *Experience Using Interactive Highway Safety Design Model (IHSDM) to Evaluate Alternatives for a Rural Mountainous Two-Lane Highway 3R Project. 2005 ITE District 6 Annual Meeting Proceedings* (CD-ROM). Institute of Transportation Engineers, July 9 – 13, Kalispell, MT.
- Levison, W.H., Bittner, A.C. Campbell, C. Jr., John, L. and Schreiner, C.. (2002) *Modification and Partial Validation of the Driver/Vehicle Module. Transportation Research Record 1803*, Transportation Research Board, Washington D.C., pp. 52-58.
- Louisell, C., Collura, J. Knodler, M. and Heaslip, K. (2006). *A Simple Algorithm for Quantifying the Impact of Driver Behavior on Traffic Flow and Safety During Forced Merges in Work Zones. Compendium of Papers of the 85th Transportation Research Board Annual Meeting* (CD-ROM). Transportation Research Board, Washington D.C.
- Mandli Communications, Inc. <<http://www.mandli.com/>> (March 5, 2007)

Oh, J., Lyon, C. Washington, S. Persaud, B. and Bared, J.. (2003). Validation of FHWA Crash Models for Rural Intersections. *Transportation Research Record 1840*, Transportation Research Board, Washington D.C., pp. 41-49.

Utah Department of Transportation (UDOT). Accident Records Website.
<<http://168.178.125.103/udotasset/login/login.asp>> Log-in required. (September 28, 2006)

Utah Department of Transportation (UDOT). Mapping Website.
<<http://www.udot.utah.gov/main/f?p=100:pg:12606567523936569916:::V,T:,230>> (February 7, 2008)

Utah Department of Transportation (UDOT). Roadview Explorer 2.0 Website.
<<http://www.roadview.udot.utah.gov/>> (December 21, 2007a)

Utah Department of Transportation (UDOT). Traffic Data Website.
<<http://168.178.125.103/udotAsset/Login/LoginMain.asp?sid=QFVMMRNHAPQPCPGJKYLVVGVFJB>> (February 23, 2007b)

Appendix

Creating Centerline Alignments for Two-Lane Rural Highways Using UDOT's GPS Data

by Michael Mosley

Spring 2007

Note: Although written by Michael Mosley, this Appendix was included in the thesis because the procedure described in this Appendix was an integral part of the research

Table of Contents

A.1 How to Import GPS Survey Data Into Bentley's InRoads.....	105
A.1.1 Convert the GPS Data into InRoads Readable Data	105
A.1.2 Import Data Info Using an ASCII File.....	112
A.2 Notes on InRoads	113
A.3 Laying Out Centerline Horizontal Alignment	114
A.4 Triangulating Surface.....	124
A.5 Laying Out Centerline Profile.....	126
A.6 Laying Out Centerline Vertical Alignment.....	128
A.7 Stationing	130

A. 1 How to Import GPS Survey Data Into Bentley's InRoads

The discussions included in this report are based on the assumption that the user uses the Computer Aided Engineering Design and Manufacturing (CAEDM) computing system, which is a computer network system in the College of Engineering and Technology of Brigham Young University (BYU). Please note that what is important is to find out how to convert Geographical Positioning System (GPS) data into InRoads readable data for creating centerline alignments of two-lane rural highways and what kind of data manipulation must be done to achieve this goal of creating a surrogate centerline alignment for two-lane rural highways, whose design plans are hard to obtain, already lost in the archive, or destroyed. Depending on the highway design software the user employs to create surrogate centerline alignments, actual steps that the user has to go through may be different from what are described here. Hence, the user of this manual should focus on what has to be done instead of how it is done.

A.1.1 Convert the GPS Data into InRoads Readable Data

Two steps are involved in the data conversion. First, the GPS data (latitude, longitude, and altitude) provided by the photolog program of the Utah Department of Transportation (UDOT) in an Excel file must be converted into a text file. Then, the GPS data must be converted into survey data (easting, northing, and elevation) that can be read by Bentley's InRoads. In this example we use the Watershed Modeling System (WMS) developed by BYU to convert the GPS data into survey data. As mentioned in the introduction part of this section, a software program that needs to be used for data conversion does not have to be WMS.

In order to use WMS, GPS data must be saved as a text file so that WMS can read them, that is, GPS data given in an Excel file (.xls) from UDOT's photo-logging must be saved as a text file (.txt). Within the Excel file, select the Save As... option and save it as a text file. Figure A-1 shows a screenshots of an Excel file containing GPS data (latitude, longitude, and altitude).

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
	Latitude	Longitude	Altitude											
1														
2	40.29319	-111.2500848	2398.186											
3	40.29306	-111.2500071	2397.447											
4	40.29293	-111.2499277	2396.703											
5	40.29280	-111.249847	2395.906											
6	40.29267	-111.2497643	2395.15											
7	40.29254	-111.2496802	2394.41											
8	40.29241	-111.249595	2393.701											
9	40.29228	-111.2495078	2392.997											
10	40.29215	-111.249418	2392.323											
11	40.29203	-111.2493268	2391.635											
12	40.29190	-111.2492335	2391.053											
13	40.29178	-111.2491392	2390.399											
14	40.29165	-111.2490423	2389.841											
15	40.29153	-111.2489454	2389.24											
16	40.29140	-111.2488463	2388.665											
17	40.29128	-111.2487444	2388.092											
18	40.29116	-111.2486412	2387.556											
19	40.29104	-111.2485367	2387.053											
20	40.29092	-111.24843	2386.525											
21	40.29080	-111.2483208	2386.071											
22	40.29069	-111.2482086	2385.585											
23	40.29057	-111.2480947	2385.096											
24	40.29045	-111.2479804	2384.676											
25	40.29034	-111.2478637	2384.284											
26	40.29023	-111.2477467	2383.889											
27	40.29012	-111.2476259	2383.523											
28	40.29000	-111.2475036	2383.161											
29	40.28990	-111.2473805	2382.807											
30	40.28979	-111.2472554	2382.451											
31	40.28968	-111.2471288	2382.149											
32	40.28957	-111.2470011	2381.785											
33	40.28947	-111.2468728	2381.464											

Figure A-1: Screenshot of the Latitude, Longitude, and Altitude Data

When the user selects the Save As... option and tries to save it as a text file, two warning messages will come up, as shown in Figure A-2 and Figure A-3. Answer OK to the first message and YES to the second message. Because we use only one worksheet the first warning is irrelevant so press OK. By these operations, the GPS data were now written in text format in a new file. The data are saved as a text file with a space delimiter.

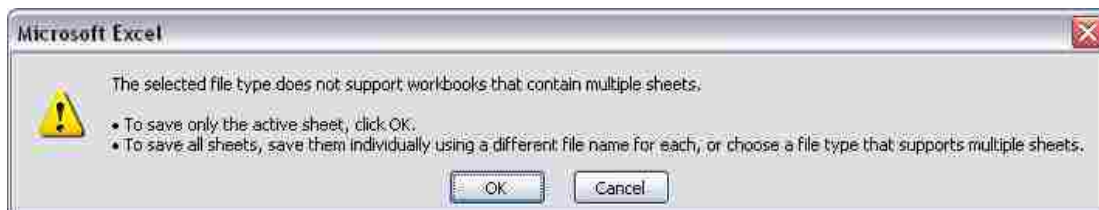


Figure A-2: Screenshot of the Warning Sign

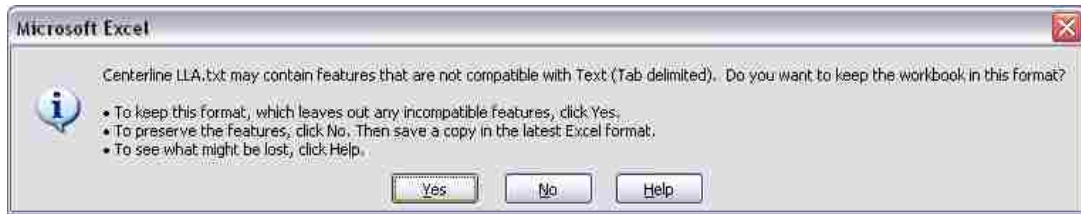


Figure A-3: Screenshot of the Warning Sign

After this operation, the user now uses the WMS software through the CAEDM Citrix server (see Figure A-4 for WMS's user interface). Once the program is loaded, open the text file that the user saved in the previous step.

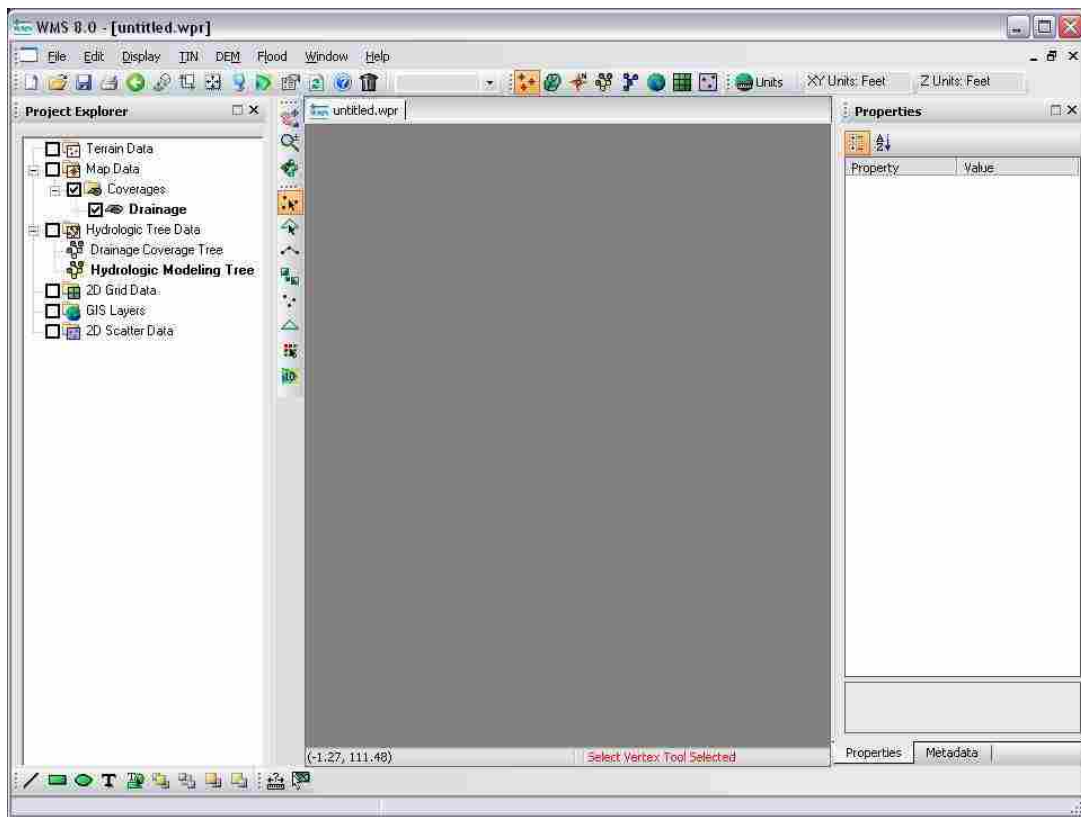


Figure A-4: Screenshot of the WMS software

When opening the text file that was saved in the previous operation, the Import Wizard of WMS will automatically start. Fill in the information as specified. See Figures A-5 and A-6 for the proper setting of the two steps required in the File Import Wizard.

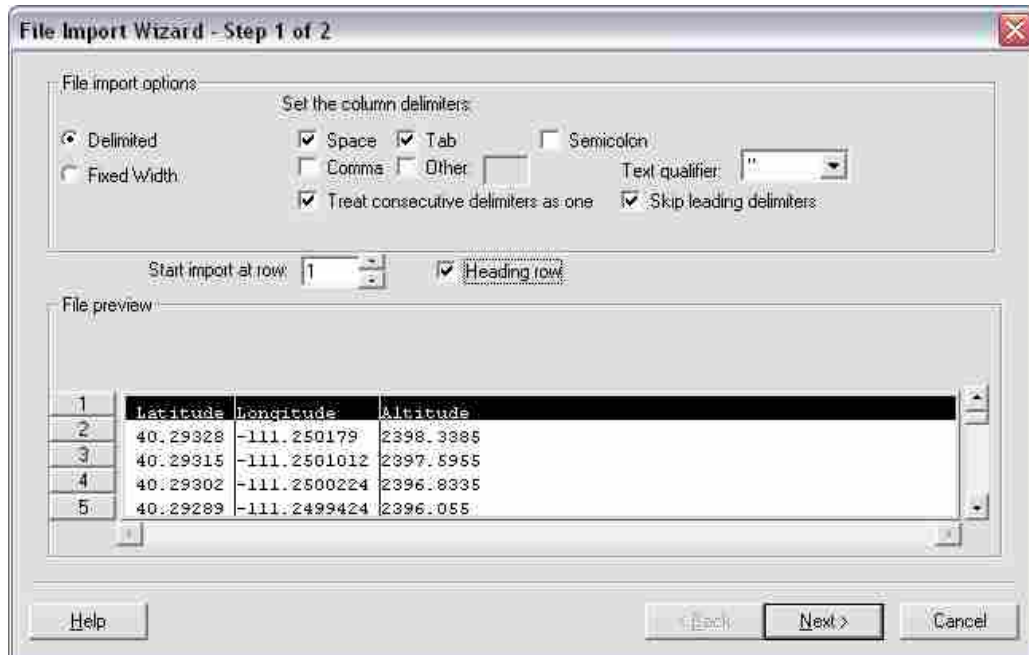


Figure A-5: Screenshot of the File Import Wizard, Step 1

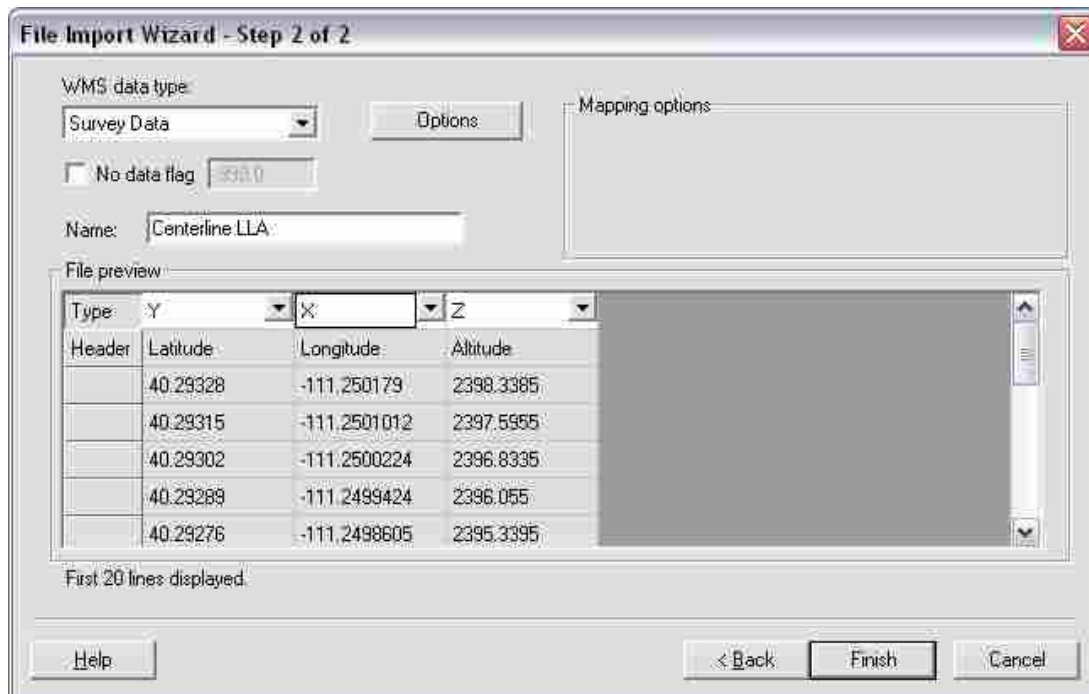


Figure A-6: Screenshot of the File Import Wizard, Step 2

Next, under the EDIT Menu of WMS, select the Coordinate Conversion menu. This will bring up the Coordinate Conversion window that is shown below. Enter the

correct information for the site and the data. For the US- 40 study section near Heber, Utah, the information shown in the screen shot below works.

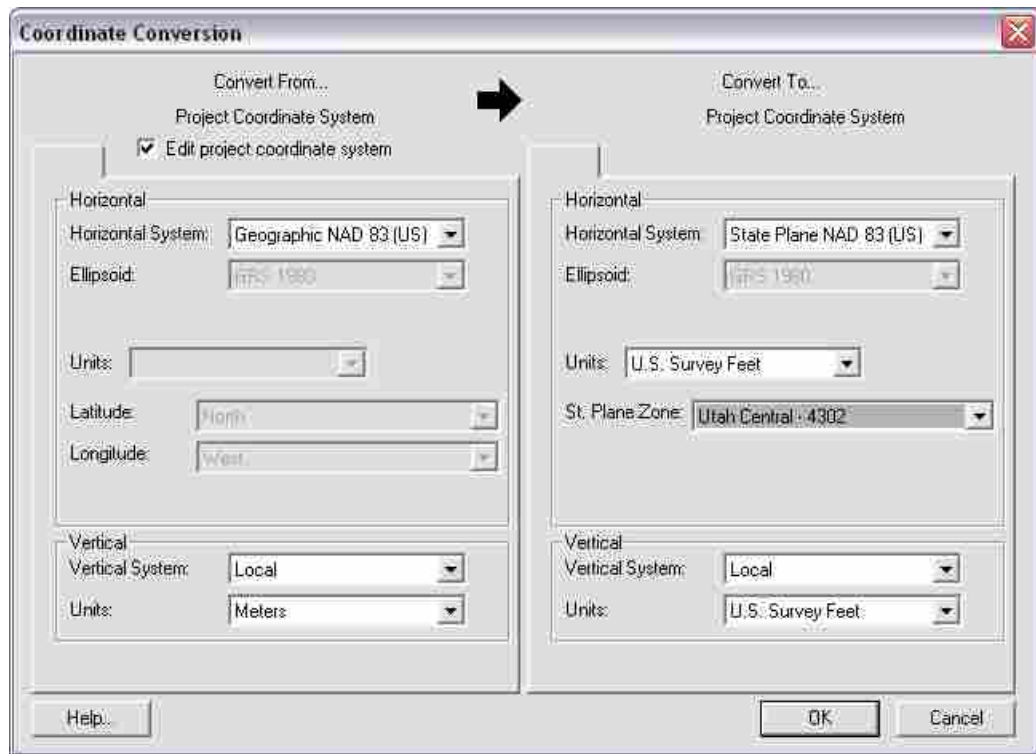


Figure A-7: Screenshot of the Coordinate Conversion Window

Once the conversion is complete, the data are ready to be saved and imported into InRoads. Save the WMS project into a folder where the data for the study section are kept, as shown Figure A-8.

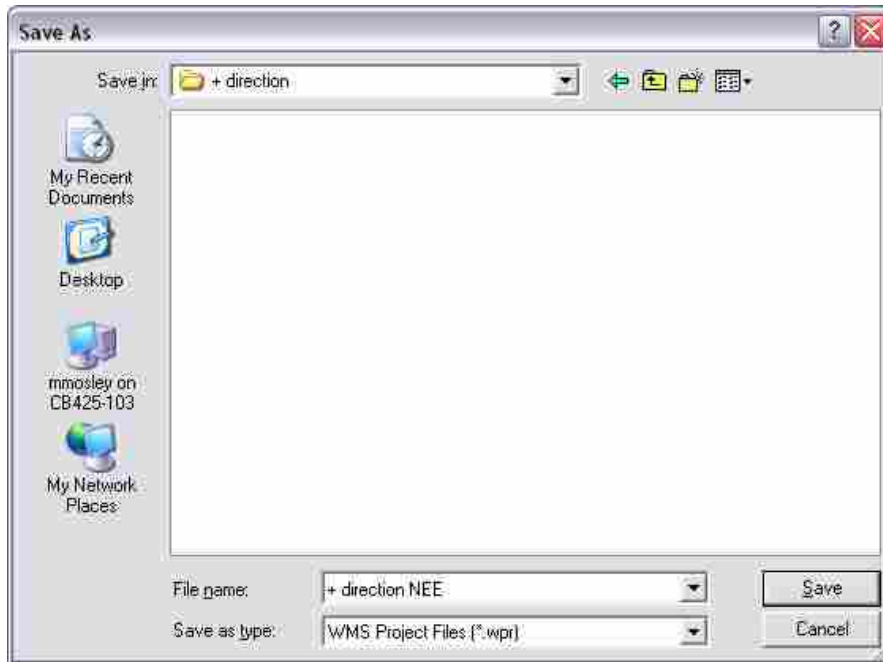


Figure A-8: Screenshot of Save As Window

Once the file is saved, close the file and go to the Windows Explorer. WMS saves multiple files for each of its projects as illustrated in Figure A-9.

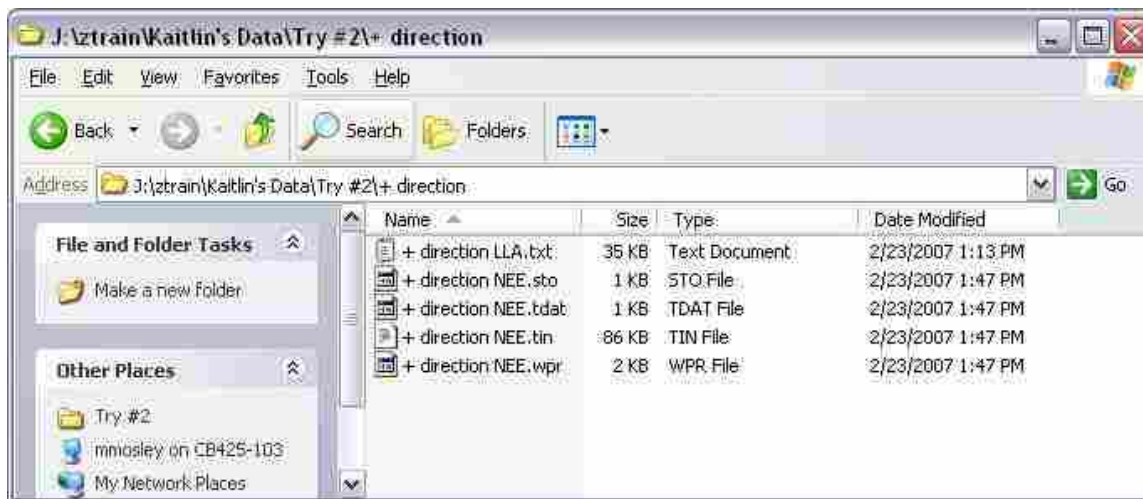


Figure A-9: List of Files Created by WMS

Locate the file that was just saved with the suffix .tin. (All of the other extra files can be disregarded to simplify things.) The .tin file is in text format. Right click the .tin

file and rename the file as a .txt, then open the file using a text editor such as Note Pad or Word Pad. The content of the file should look like Figure A-10 below.

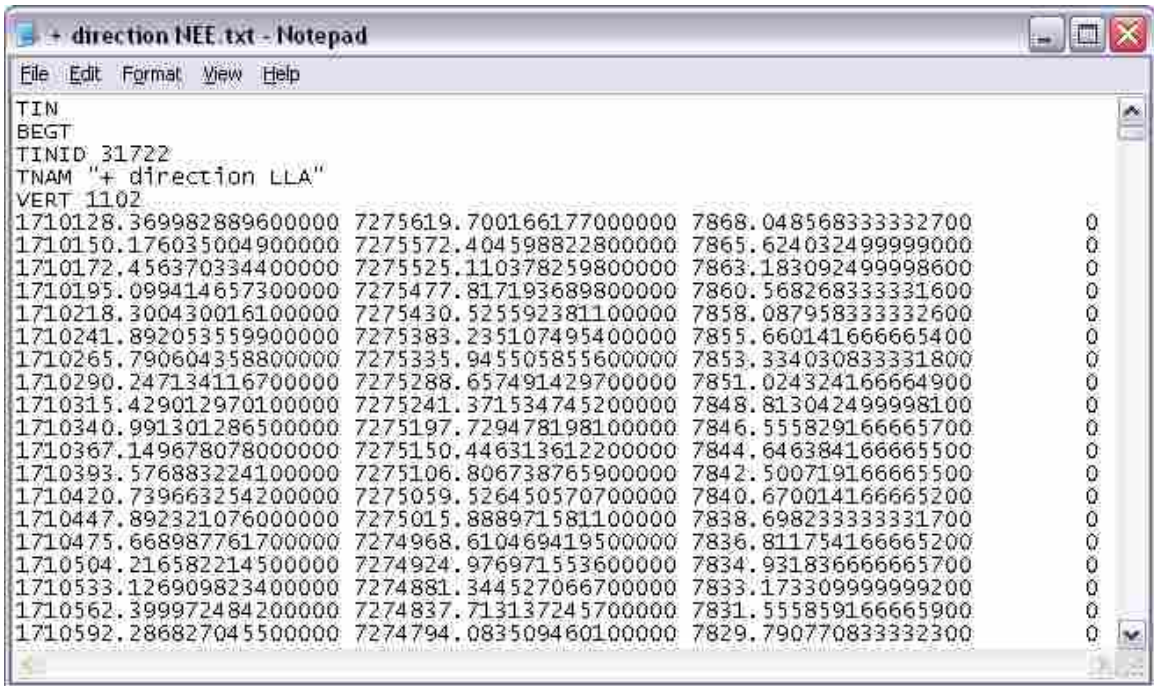


Figure A-10: Screenshot of the Text File Containing Converted Data

Delete the extra information at the top and bottom of the text file and re-label the top as Easting, Northing, and Elevation, respectively, as shown in Figure A-11. This is the format required for an ASCII (text) file to be read by InRoads.

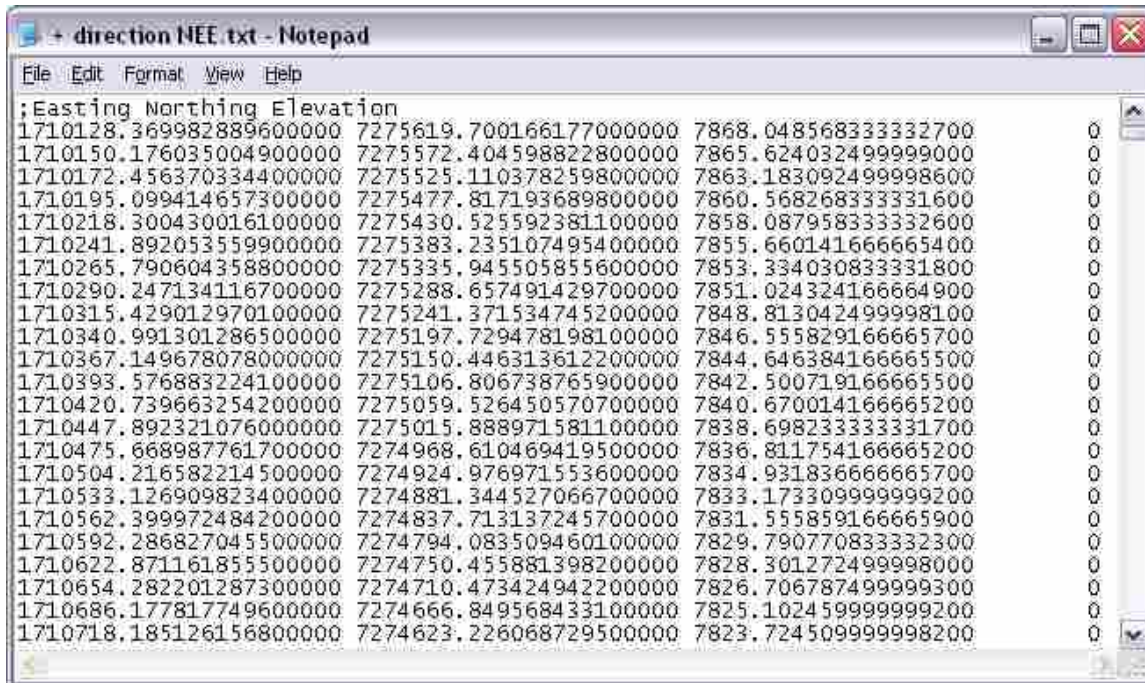


Figure A-11: Screenshot of the Converted Data after Modification

A.1.2 Import Data Info Using an ASCII File

InRoads 2004 Edition (v.08.07), which was available at the time this manual was developed, on the CAEDM network in the College of Engineering and Technology of BYU was used in this study. Hence, the menu selections presented in this section may differ from the latest version available to the user. Also, due to the peculiar setup of the CAEDM system, some of the instructions discussed below apply only to the InRoads software on CAEDM network. The user of this manual should pay attention to the steps required for the work and consult an InRoads expert of the UDOT main or region office for specific menu sequences that are required to perform the tasks described below when a different version of InRoads is used. The survey data in text format created by WMS are now imported to InRoads. Follow the menu selections presented below.

The FILE>IMPORT>SURFACE menu selection brings up the Import Surface window. It has multiple tabs. Since survey data is imported in text format, select the ASCII tab. Enter the data as shown in Figure A-12. Repeat this procedure for all other needed sets of data. The data should be in the correct location on the surface of the earth;

therefore, the drawing can be compared with a map such as Google® maps to verify its location.

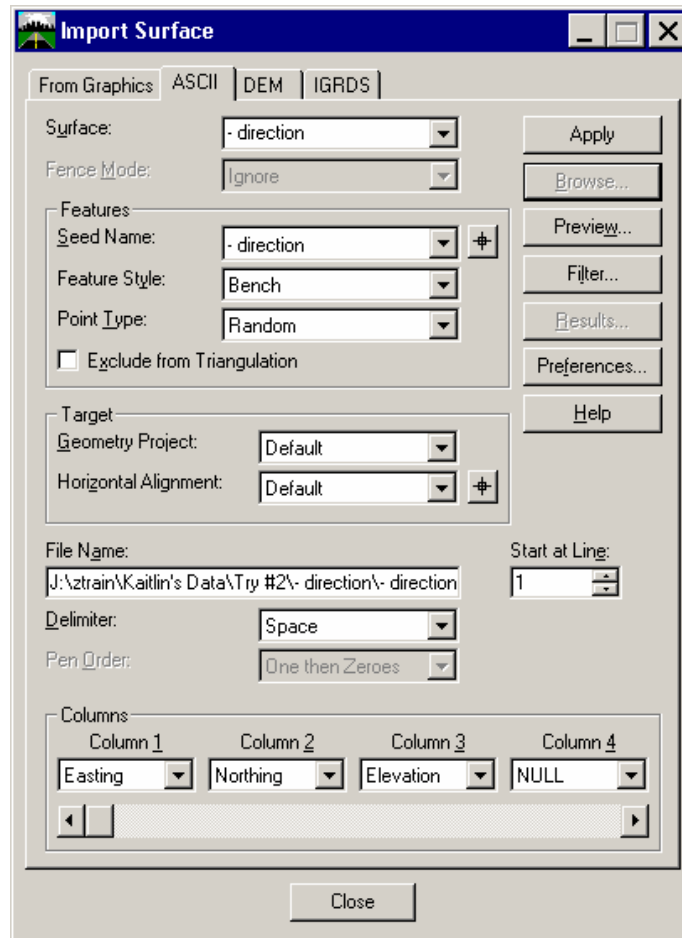


Figure A-12: Screenshot of the Window of Importing Points in InRoad

A.2 Notes on InRoads

Please note that the following descriptions related to computer drive names are all related to the CAEDM system of BYU. When these steps are implemented in a different system, computer drive names are different.

Since InRoads is used through the Citrix server of the CAEDM network, each time the program is opened, the Preferences have to be changed from the default o:/ server to a local file on your j:/ drive. The Preferences can be changed by toggling the PREFERENCES Tab and right clicking and selecting OPEN. (This modification is peculiar to InRoads on the CAEDM system and the user of this manual is recommended

to get assistance from InRoads specialists available to him/her to know how to deal with the driver selections.)

There are always two Preference files. The first is a just an .ini file and the second is a wysiwyg.ini. See Figure A-13 to find where these Preference files are listed. Open both of these files to maintain proper preferences. If it is desired to change any of the preferences in the Preference files, the user can do so at anytime. The preferences can be saved and used in the next session of Inroads.

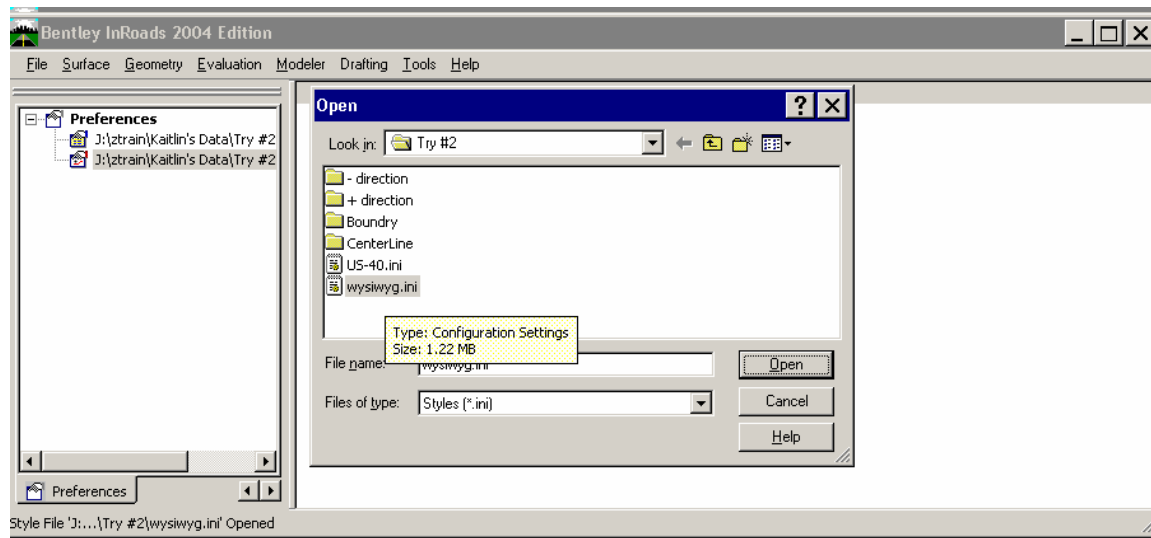


Figure A-13: Screenshot Showing the Preference Files

A.3 Laying Out Centerline Horizontal Alignment

Clear the drawing space and make a new level that will be used for the tangents of the Horizontal Alignment. Change the color to whatever is desired and make sure that the Level color thickness and type are all set to “By level.” These buttons can be found at the top of the main drawing window in Microstation. Once the survey points are imported, the point data are presented in the InRoads drawing area as shown in Figure A-14. Note that the points of the two directions appear to be a single “line”; however, as the drawing area is zoomed in, the two “lines” appear.

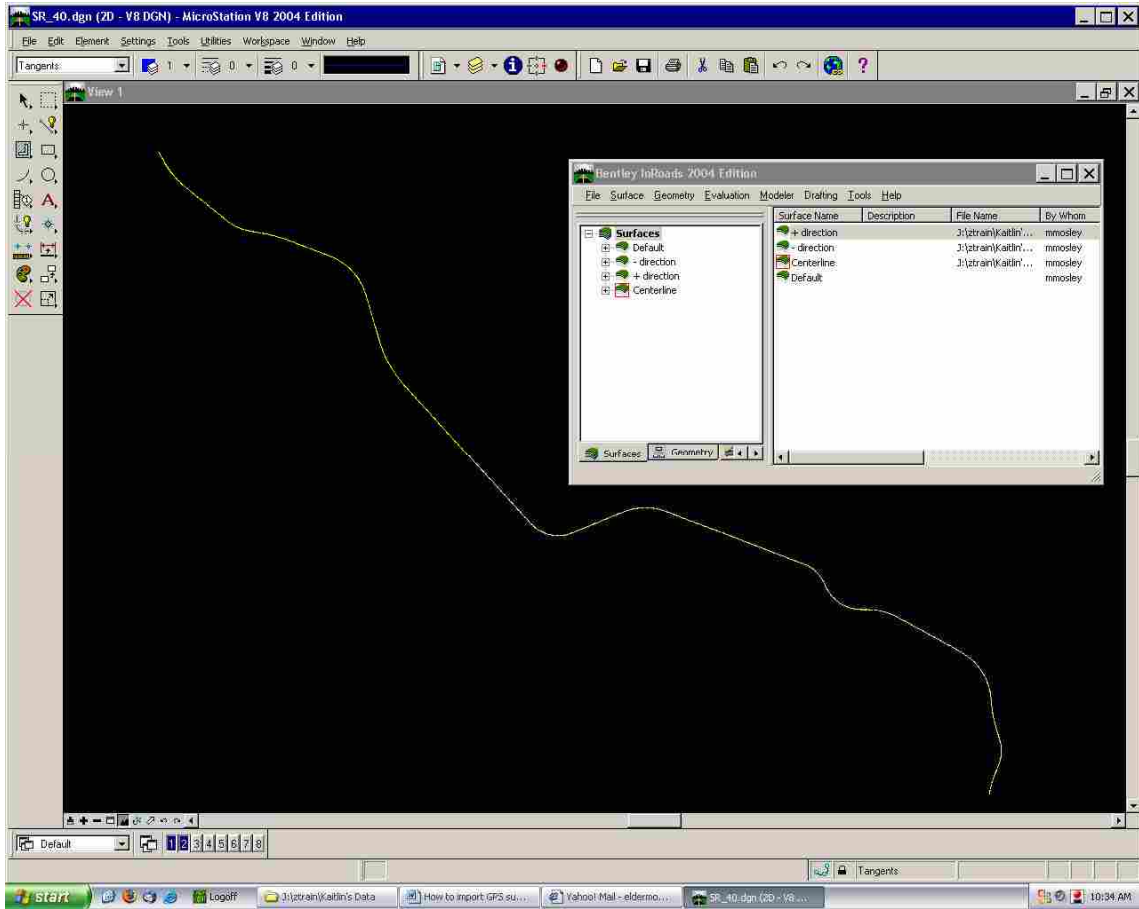


Figure A-14: Screenshot of the Plotted Survey Points in InRoads

Draw in tangents for a guide using the line function to prepare for drawing a horizontal alignment, as shown in Figure A-15. Note that a good trick for Microstation is to click both right and left buttons at once to snap to a desired location.

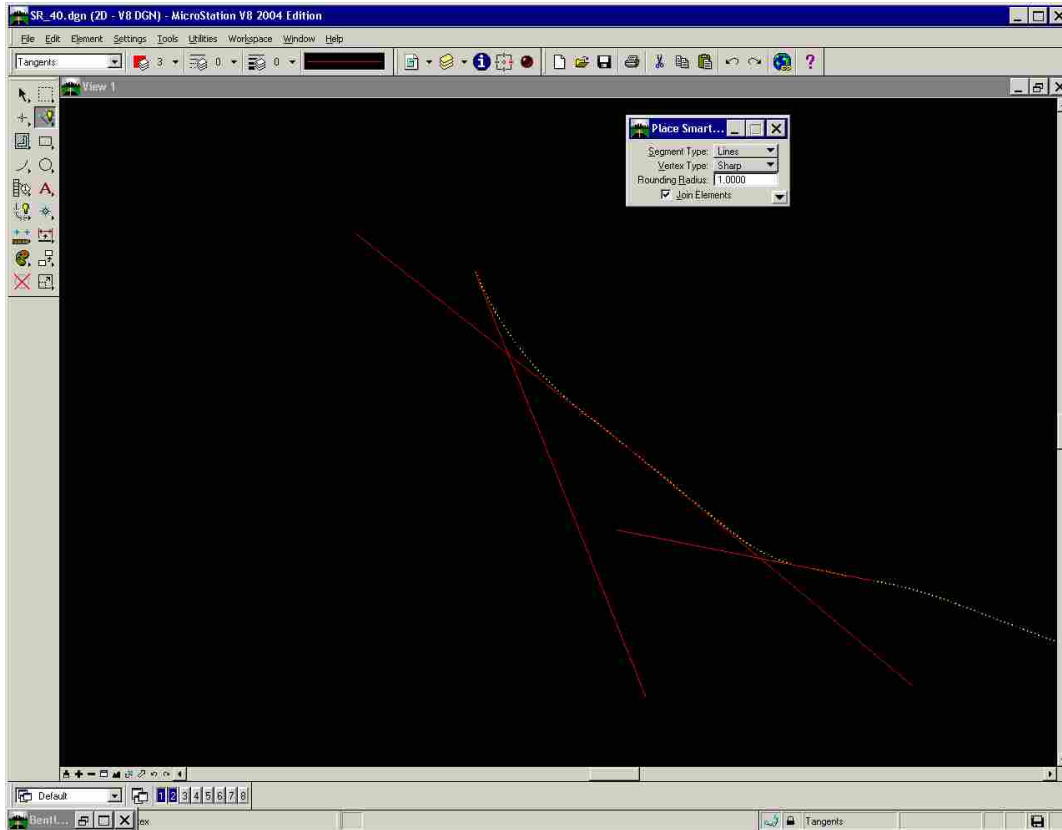


Figure A-15: Screenshot of Tangents in InRoads

Where these tangents intersect is called the Point of Intersection (PI). Continue to place tangents along the lengths of the curves until each curve has point of intersection.

Next, under the Inroads Menu select the TOOL>CUSTOMIZE sequence, which opens the Customize window as shown in Figure A-14. Check the box of Horizontal Curve Set and close the Customize window. After this action, a tool bar containing command icons of the Horizontal Curve Set method of laying down horizontal alignments shows up right below the InRoads Main Menu as shown in Figure A-16.

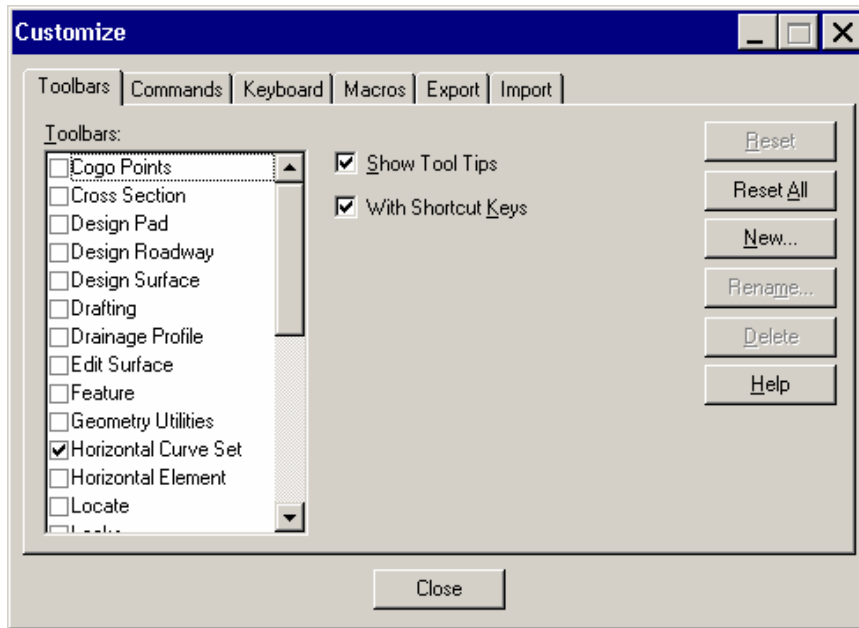


Figure A-16: Screenshot of the Customize Window



Figure A-17: Screenshot of the InRoads Main Window Showing the Horizontal Curve Tool Bar

Toggle over to the Geometry tab in InRoads. Right click over the main Geometry tree and click new. Add a new Project and call it whatever the road is that you are working on. Click the Apply button, then, without closing out of the new window, use the drop down menu under type and select Horizontal Alignment as shown in Figure A-18.

Fill in the Name and Description entries. Now you have a memory area to put your alignment data.

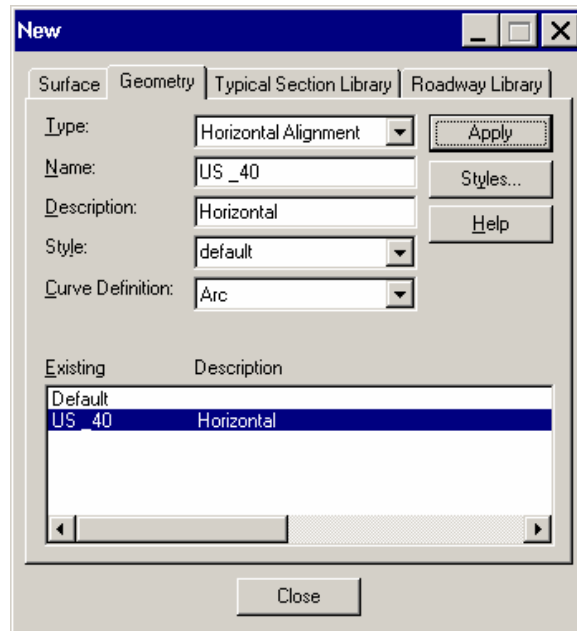


Figure A-18: Screenshot of Geometry Setup Window

When using InRoads, be sure to save your drawing. InRoads does not save anything that you have worked up to this point unless the user explicitly save the work. After this action is taken, there should be horizontal alignment below the Geometry Project. In the screen shot shown in Figure A-19, a place holder for the alignments for the “US_40” study section was created.

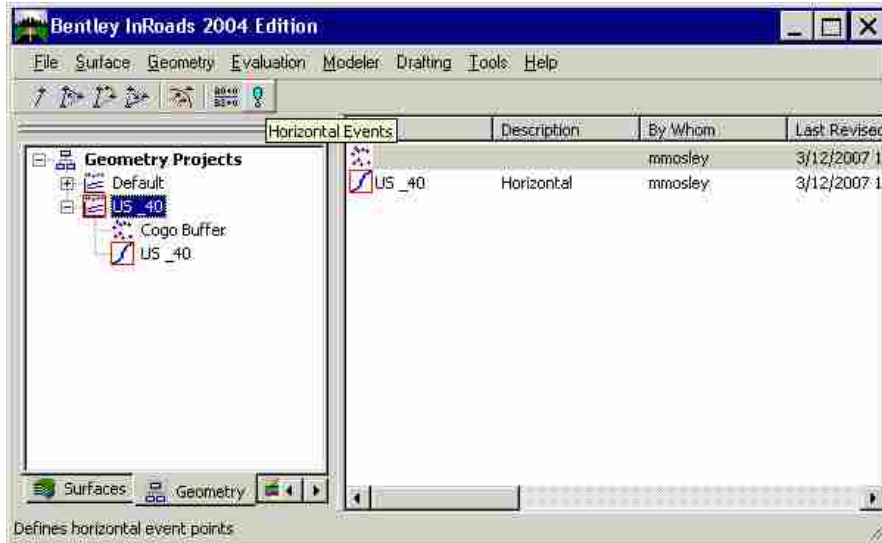


Figure A-19: Screenshot of the Geometry Projects Window

Select the Insert PI function from the Horizontal Curve Set tool bar to place PI all along the alignment. Place the PI starting at the end of the alignment and then place at each intersection that was drawn using the tangents. The user may want to bring up the Button Bar in Microstation to help snap to the intersections of the tangent lines. This button bar is found by right clicking on the light blue connected balls on the bottom right of the Microstation main screen. Then the intersection snap command will be available when it is needed. Be sure to left click after selecting the PI location to confirm to both Microstation and Inroads what you want to do. Figure A-20 shows the task of inserting PIs.

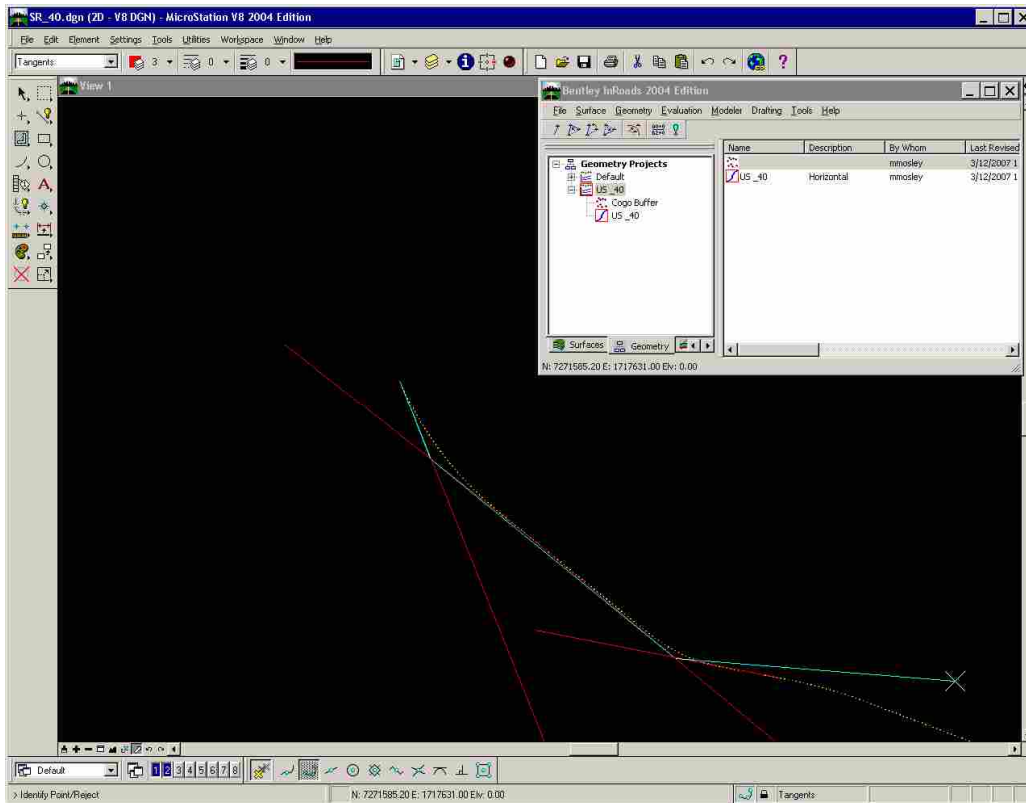


Figure A-20: Screenshot Showing the Task of Inserting PI's

Next, view both outer sides of the road way by viewing the surface. The user needs to triangulate to place a surface between the GPS data of the east and west directions. Refer to Section A.4 of this Appendix to find out how to triangulate between the two sets of survey points (for the two directions of the highway). Figure A-21 shows the triangulated surface between the two lines that indicate the data points of the two directions of the highway.

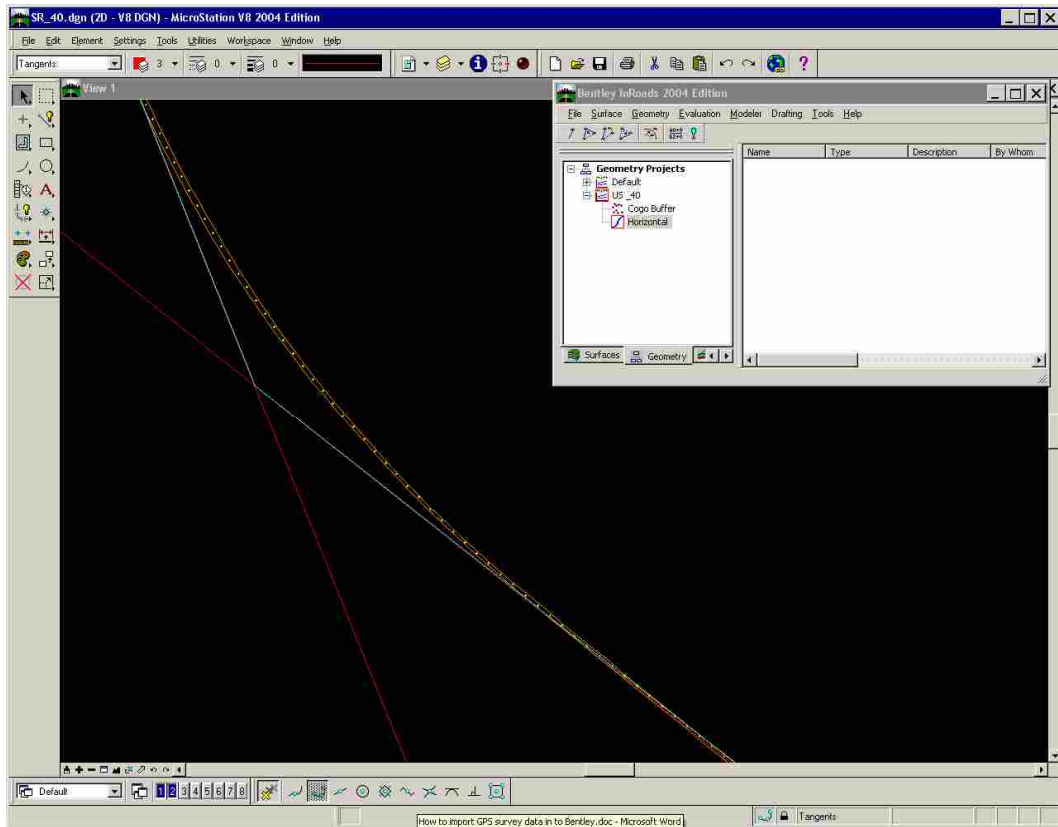


Figure A-21: Screenshot of the Triangulated Surface

Use the Define Horizontal Curve Set window (illustrated in Figure A-22) to adjust the radius of the curve to fit the curve in between the two lines, which were created by using the survey data converted from the GPS data in the previous step. Figure A-23 shows a curve that are fitted between the two tangents. If the Horizontal alignment is placed outside the GPS data on each side it will not show up on the Profile because it does not pass through a triangulated surface.

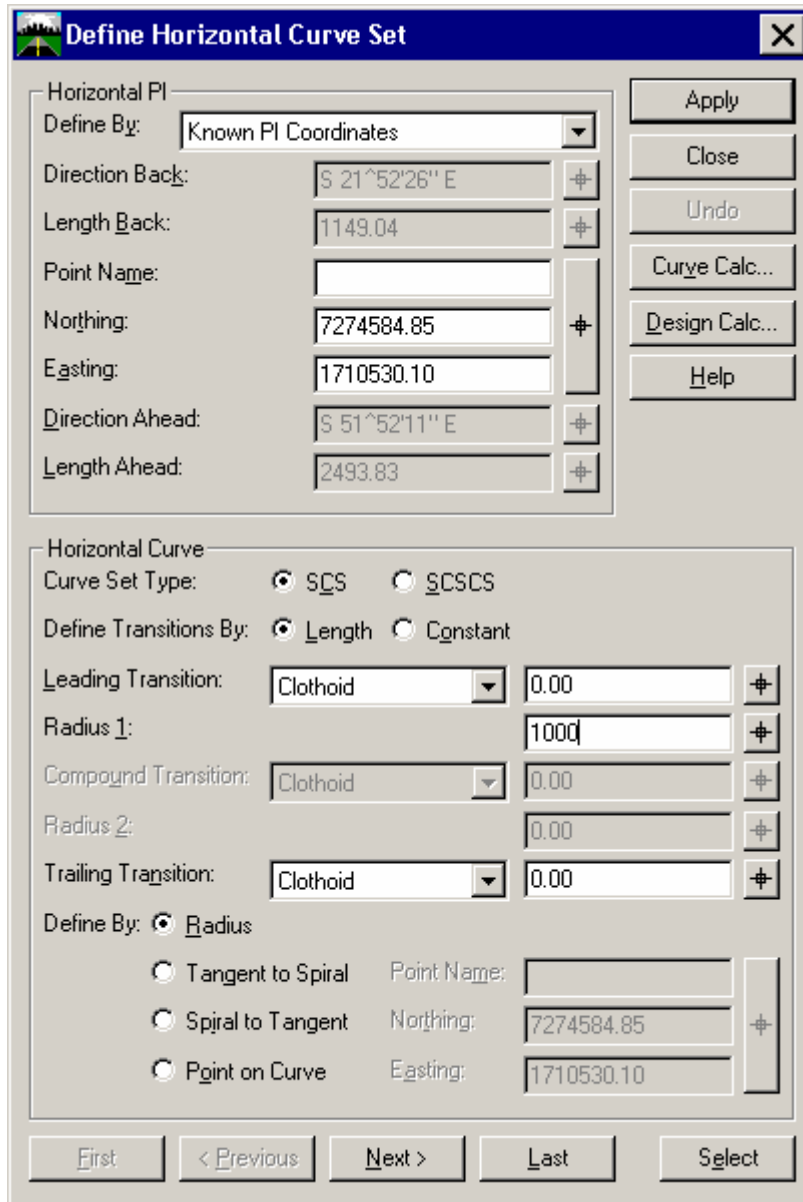


Figure A-22: Screenshot of the Horizontal Curve Setting Window

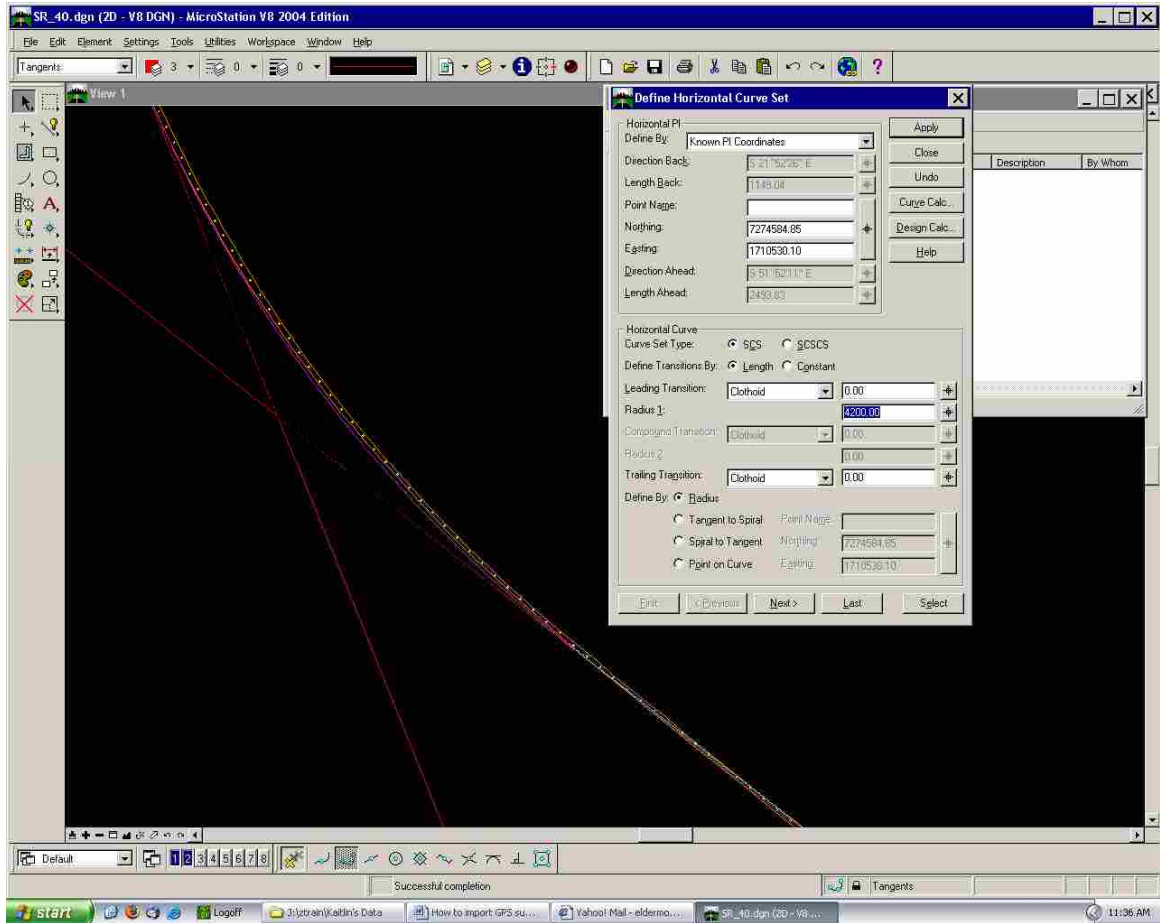


Figure A-23: Screenshot of a Horizontal Curve

Adjust the radius until the curve fits between the two boundaries. If the curve does not fit with any given radius, adjust the PI location by using the Move PI button. Adjust the radius and the Move PI function until the curve falls right in between the boundaries as shown in Figure A-24. The boundary lines were created by the survey point data for the + direction and the - direction.

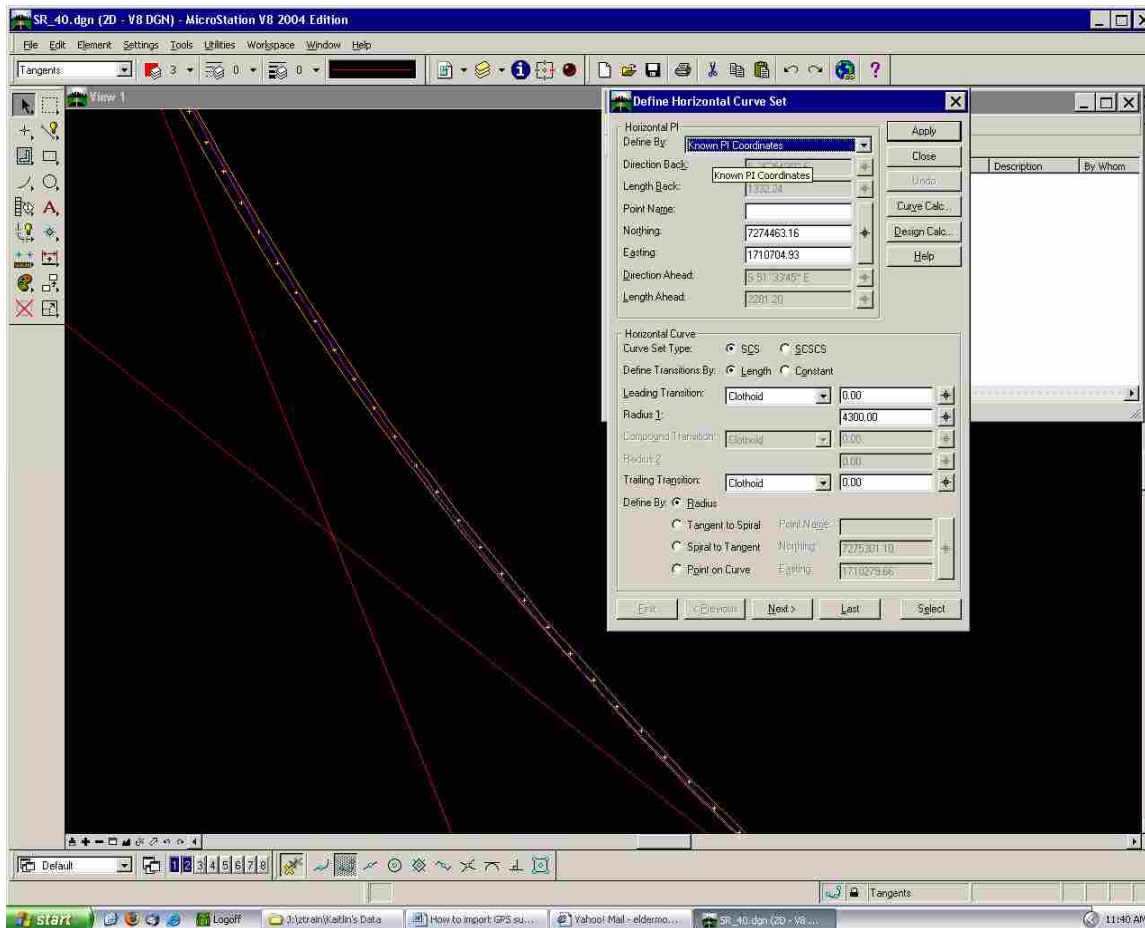


Figure A-24: Screenshot of Inserting PI Station

The finished horizontal alignment can be viewed by right clicking on the alignment in InRoads and selecting Review. The information of the alignment is shown. The user can then save the information as a text file to be used in other software programs such as IHSDM.

A.4 Triangulating Surface

When triangulating among the data points in the two directions, that is, two outer boundaries, under the SURFACE>TRIANGULATE SURFACE option, make sure that the lengths of the triangle do not exceed the triangular distance across the roadway. In order for this to work, the outer boundary coordinates need to be in one .txt file so that the triangles are formed correctly. Copy and paste all of the coordinates from one of the

sides of the road into the other and then SAVE AS and import this surface into the project.

The ends of this surface should be connected by one line as shown in Figure A-25. Now this surface can be triangulated. Select the SURFACE>TRIANGULATE SURFACE menu sequence and get the Triangulate Surface window.

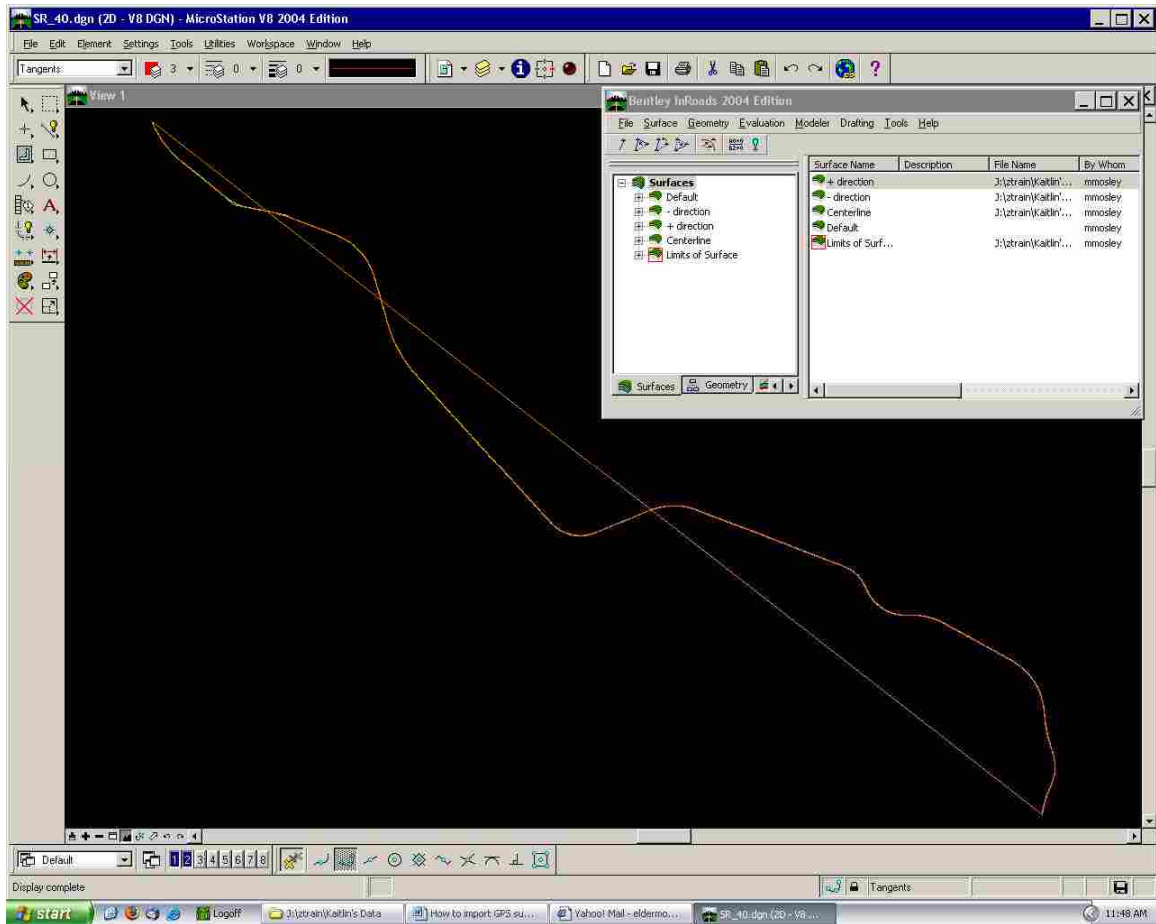


Figure A-25: Screenshot of the Triangulated Surface

Make sure that the maximum length is no longer than across the road, roughly 200-300 feet. Also make sure the View Triangles check box is selected as shown in the screenshot in Figure A-26.

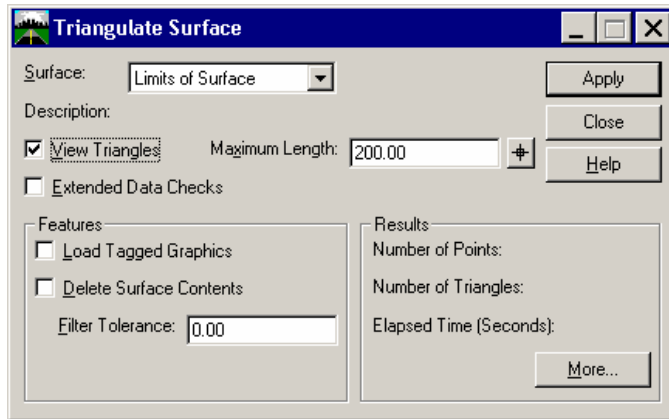


Figure A-26: Screenshot of the Triangulate Surface Setup Window

A.5 Laying Out Centerline Profile

Once the centerline horizontal alignment is completed, the profile associated with the horizontal alignment is laid out. Use the EVALUATION>PROFILE>CREATE PROFILE menu sequence to create a profile. Figure A-27 shows the Create Profile window of InRoads. Go through each of the tabs to become familiar with what goes into a profile. On the Features tab, make sure that the crossover data is selected just in case there are any holes, or “gaps,” caused by the horizontal alignment that went outside the boundary lines, in the profile.

Once the Apply button is pressed, the profile is drawn as shown Figure A-28 (see the top side of the drawing window for a white rectangular area). The rectangular grey area is the profile created. The starting point of the profile, that is the base point which is used to draw a profile, can be placed anywhere in the drawing. Make sure that the profile will not overlap with the horizontal alignment. The extra lines in the Profile can be deleted to make a cleaner drawing as shown in Figure A-29.

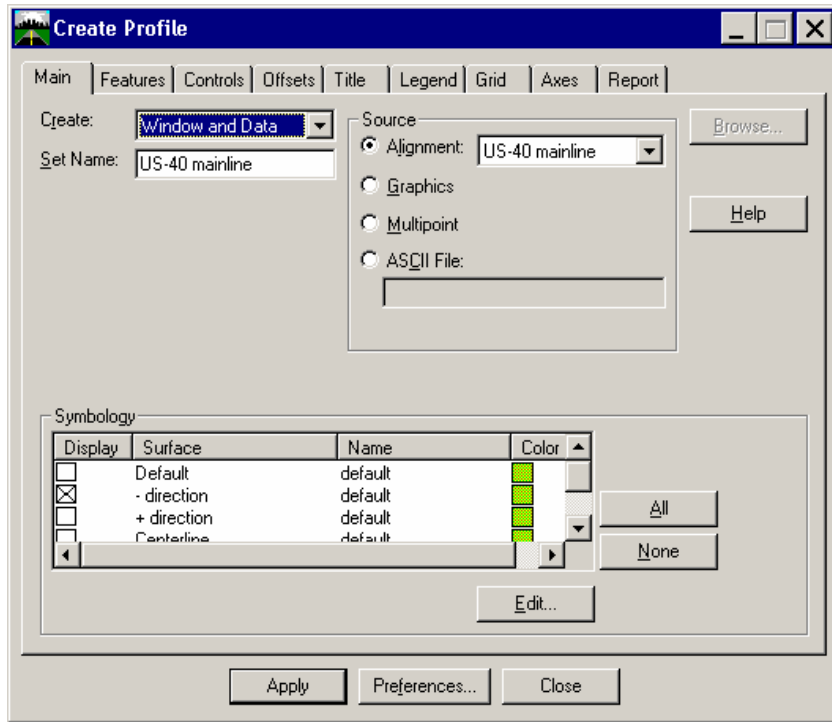


Figure A-27: Screenshot of the Create Profile Window

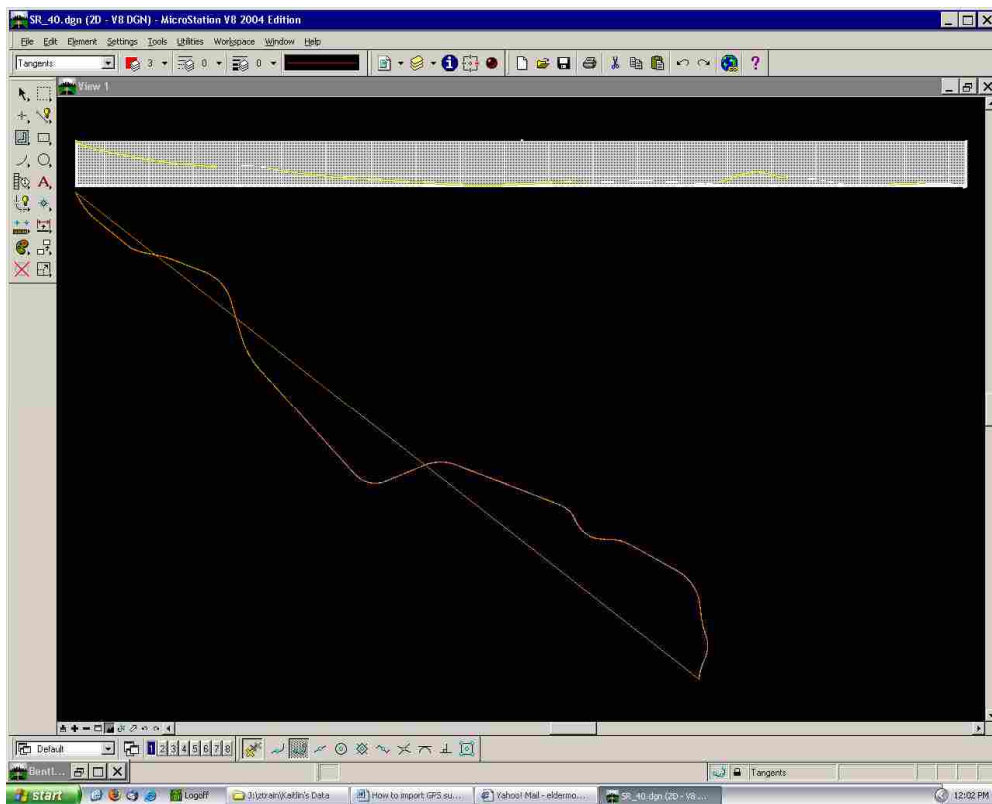


Figure A-28: Screenshot of the Created Profile

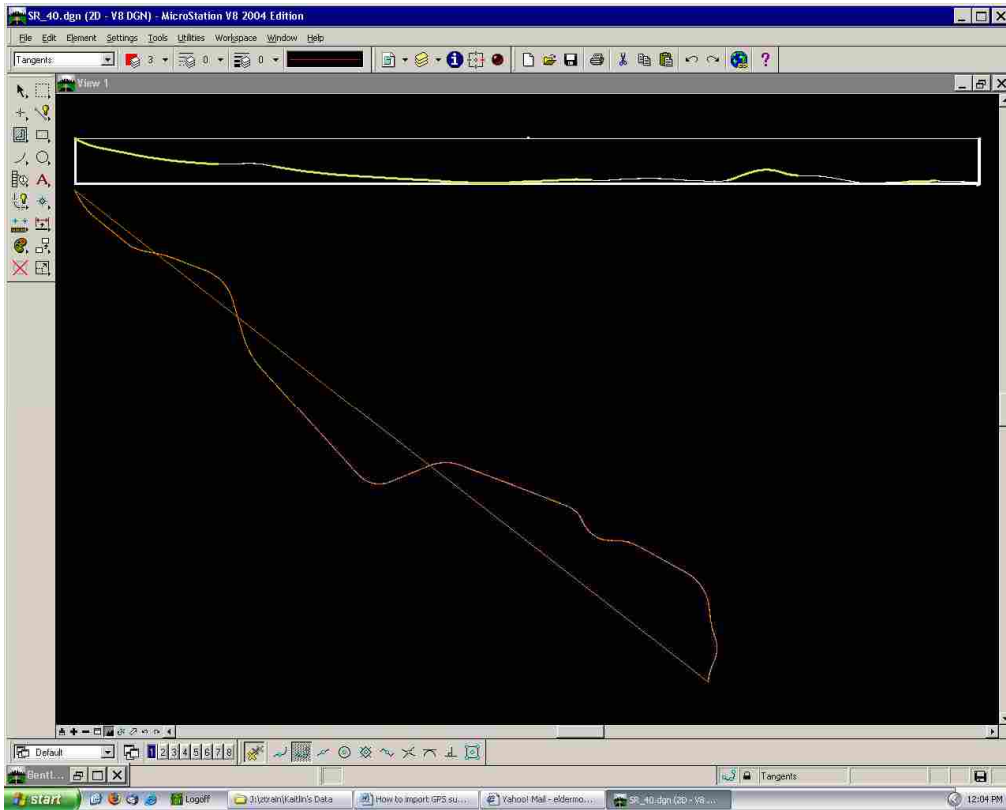


Figure A-29: Screenshot of Edited Profile Window

A.6 Laying Out Centerline Vertical Alignment

The vertical alignment can be laid out in the manner similar to the way that the horizontal alignment was done. Draw tangents using the profile as a guide. If needed, a second profile can be produced with greater exaggeration of the slopes, such as 50 to 1, so as to help draw the tangents and place the vertical points of intersection (VPI). Bring up the Vertical Curve Tool Bar under the Customize Menu to make it easier to draw vertical alignments. Figure A-30 shows the Geometry Project window where vertical alignments created by the user will appear.



Figure A-30: Screenshot of the Geometry Projects

To place these VPIs, follow the instructions that are presented in the bottom of the Mircostation information bar. Click on the location of each of the VPI as marked by the tangents. Always make sure that the left button is used to confirm these locations. Define the vertical curve using the length of the vertical curve and place it as close as possible to the existing profile. Go through each curve on the alignment. Figure A-31 shows the Define Vertical Curve Set window that will help the user create a vertical curve with a given vertical curve length.

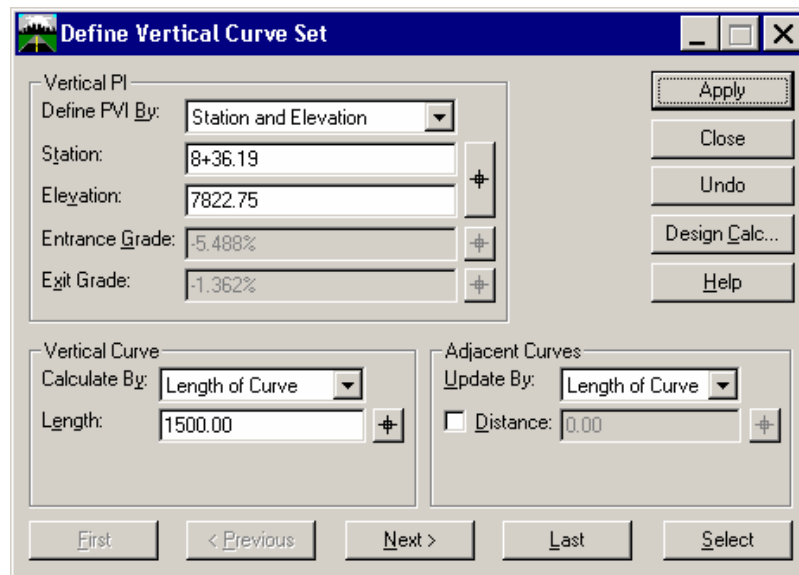


Figure A-31: Screenshot of the Define Vertical Curve Set Window

Data for the vertical curves can also be viewed by right clicking on the specific curve in Inroads and selecting the Review option. Figure A-32 shows the result of selecting the Review option. This window presents data of all the vertical curves created by the user. Save the file as a .txt for use in other programs like IHSDM.

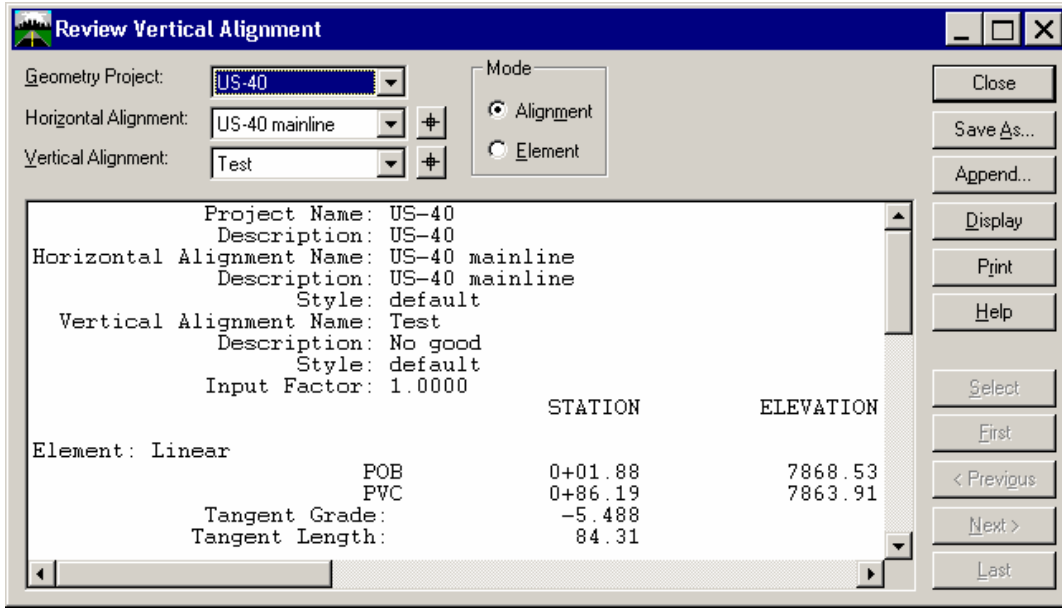


Figure A-32: Screenshot of Reviewing Vertical Alignment Window

A.7 Stationing

The stationing feature is found under the Geometry Menu Select functions that are desired to be shown in drawing. In the View Stationing window, enter all necessary selections. Some of the leaders and minor stationing can be unchecked to simplify the information. Figure A-33 shows a screenshot of the View Stationing window. An illustration of the final view of the stationing on the horizontal alignment is shown in Figure A-34.

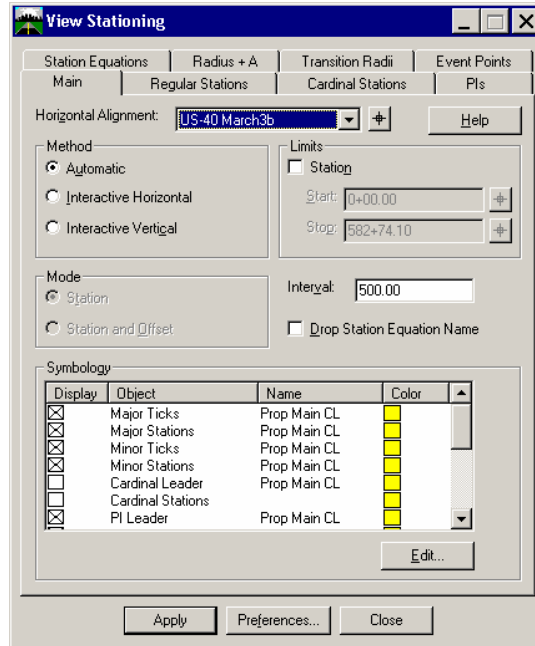


Figure A-33: Screenshot of the View Stationing Window

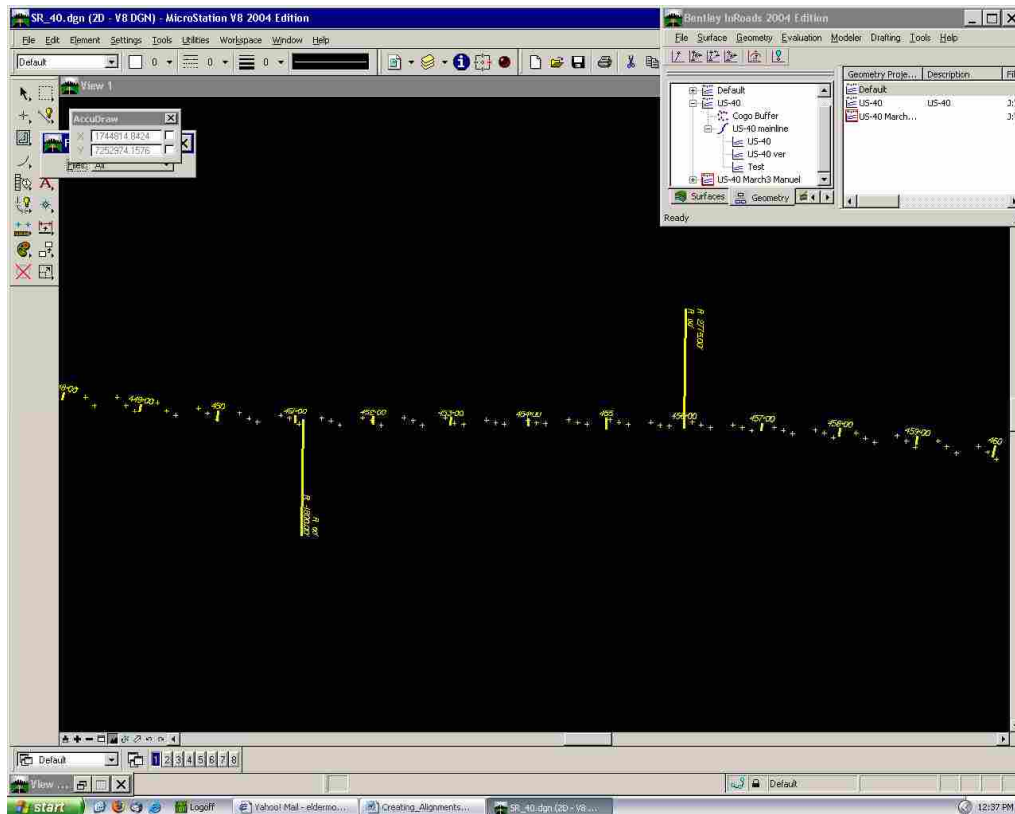


Figure A-34: Screenshot of a Completed Stationing

